

Korenix JetNet 6524G Series
24-Port Gigabit Stackable
Layer 3 Managed Ethernet Switch

User Manual

Version 1.3, Jan. 2010



www.korenix.com

CONTENTS

1	Introduction	24
1.1	Switch Description	24
1.2	Features	24
1.3	Front-Panel Components	25
1.4	LED Indicators	25
1.5	Rear Panel Description	25
1.6	Management Options	26
1.7	Web-based Management Interface	26
1.8	Command Line Console Interface Through the Serial Port or Telnet	27
1.9	SNMP-Based Management.....	27
1.10	Model Name & Packaging.....	28
2	Installation and Quick Startup	29
2.1	Package Contents	29
2.2	Switch Installation.....	29
2.3	Installing the Switch in a Rack.....	29
2.4	Stacking the Switches	30
2.5	Quick Starting the Switch	31
2.6	System Information Setup	31
2.6.1	Quick Start up Software Version Information.....	32
2.6.2	Quick Start up Physical Port Data	32
2.6.3	Quick Start up User Account Management.....	33
2.6.4	Quick Start up IP Address.....	33
2.6.5	Quick Start up Uploading from Switch to Out-of-Band PC (Only XMODEM)	35
2.6.6	Quick Start up Downloading from Out-of-Band PC to Switch (Only XMODEM)	35
2.6.7	Quick Start up Downloading from TFTP Server.....	36
2.6.8	Quick Start up Factory Defaults	36
2.6.9	Connecting Devices to the Switch	36
3	Console and Telnet Administration Interface	38
3.1	Local Console Management.....	38
3.2	Set Up your Switch Using Console Access	38
3.3	Set Up your Switch Using Telnet Access.....	39
4	Web-Based Management Interface	40
4.1	Overview	40
4.2	How to log in.....	40

4.3	Web-Based Management Menu	41
5	Command Line Interface Structure and Mode-based CLI	47
5.1	CLI Command Format	47
5.2	CLI Mode-based Topology	47
6	Switching Commands	50
6.1	System Information and Statistics commands	50
6.1.1	show arp	50
6.1.2	show calendar	50
6.1.3	show eventlog	51
6.1.4	show running-config	51
6.1.5	show sysinfo	52
6.1.6	show hardware	53
6.1.7	show login session	54
6.2	Device Configuration Commands	54
6.2.1	Interface	55
6.2.1.1	show interface status	55
6.2.1.2	show interface counters	55
6.2.1.3	show interface switch	61
6.2.1.4	interface	62
6.2.1.5	speed-duplex	62
6.2.1.6	negotiate	63
6.2.1.7	capabilities	64
6.2.1.8	storm-control flowcontrol	65
6.2.1.9	shutdown	66
6.2.2	L2 MAC Address and Multicast Forwarding Database Tables	67
6.2.2.1	show mac-addr-table	67
6.2.2.2	show mac-address-table gmrp	68
6.2.2.3	show mac-address-table igmpsnooping	69
6.2.2.4	show mac-address-table multicast	70
6.2.2.5	show mac-address-table stats	71
6.2.2.6	show mac-address-table agetime	71
6.2.2.7	mac-address-table aging-time	72
6.2.3	VLAN Management	72
6.2.3.1	show vlan	72
6.2.3.2	show vlan id	73
6.2.3.3	show protocol group	74
6.2.3.4	show interface switchport	74

6.2.3.5	vlan database	75
6.2.3.6	vlan	76
6.2.3.7	vlan name	76
6.2.3.8	vlan makestatic	77
6.2.3.9	protocol group.....	77
6.2.3.10	switchport acceptable-frame-type	78
6.2.3.11	switchport ingress-filtering	79
6.2.3.12	switchport native vlan	80
6.2.3.13	switchport allowed vlan.....	81
6.2.3.14	switchport tagging.....	82
6.2.3.15	switchport priority.....	83
6.2.3.16	switchport protocol group.....	84
6.2.3.17	switchport forbidden vlan	87
6.2.4	GVRP and Bridge Extension	87
6.2.4.1	show bridge-ext	87
6.2.4.2	show gvrp configuration.....	88
6.2.4.3	show gmrp configuration.....	89
6.2.4.4	show garp configuration.....	90
6.2.4.5	bridge-ext gvrp.....	90
6.2.4.6	bridge-ext gmrp.....	91
6.2.4.7	switchport gvrp.....	91
6.2.4.8	switchport gmrp	92
6.2.4.9	garp timer.....	94
6.2.5	IGMP Snooping	97
6.2.5.1	Show Commands	97
6.2.5.2	Configuration Commands	100
6.2.6	Port Channel.....	109
6.2.6.1	show port-channel	109
6.2.6.2	port-channel.....	111
6.2.6.3	port-channel adminmode all	111
6.2.6.4	port-channel staticcapability	112
6.2.6.5	port-channel linktrap	112
6.2.6.6	port-channel name.....	113
6.2.6.7	adminmode	113
6.2.6.8	lacp	114
6.2.6.9	channel-group.....	115
6.2.6.10	delete-channel-group.....	115

6.2.7	Storm Control.....	116
6.2.7.1	show storm-control	116
6.2.7.2	storm-control broadcast	118
6.2.7.3	storm-control multicast.....	119
6.2.7.4	storm-control unicast	120
6.2.7.5	switchport broadcast packet-rate	121
6.2.7.6	switchport multicast packet-rate	122
6.2.7.7	switchport unicast packet-rate	123
6.2.8	L2 Priority	124
6.2.8.1	show queue cos-map.....	124
6.2.8.2	queue cos-map	125
6.2.9	Port Mirror.....	125
6.2.9.1	show port-monitor session.....	125
6.2.9.2	port-monitor session	126
6.2.9.3	port-monitor session mode	127
6.3	Management Commands	127
6.3.1	Network Commands	127
6.3.1.1	show ip interface.....	127
6.3.1.2	show ip filter	128
6.3.1.3	show ip ipv6	129
6.3.1.4	mtu	129
6.3.1.5	interface vlan	130
6.3.1.6	ip address	130
6.3.1.7	ip default-gateway.....	131
6.3.1.8	ip address protocol	131
6.3.1.9	ip filter	132
6.3.1.10	ip ipv6	133
6.3.2	Serial Interface Commands	134
6.3.2.1	show line console	134
6.3.2.2	line console.....	135
6.3.2.3	baudrate.....	135
6.3.2.4	exec-timeout	135
6.3.2.5	password-threshold	136
6.3.2.6	silent-time	136
6.3.3	Telnet Session Commands.....	137
6.3.3.1	telnet.....	137
6.3.3.2	show line vty	138

6.3.3.3	line vty.....	138
6.3.3.4	exec-timeout	139
6.3.3.5	password-threshold	139
6.3.3.6	maxsessions	140
6.3.3.7	sessions.....	140
6.3.3.8	telnet sessions	141
6.3.3.9	telnet maxsessions	141
6.3.3.10	telnet exec-timeout	142
6.3.3.11	show telnet.....	143
6.3.4	SNMP Server Commands	143
6.3.4.1	show snmp.....	143
6.3.4.2	show trapflags.....	144
6.3.4.3	snmp-server sysname	145
6.3.4.4	snmp-server location	145
6.3.4.5	snmp-server contact	146
6.3.4.6	snmp-server community	146
6.3.4.7	snmp-server host	149
6.3.4.8	snmp-server enable traps	150
6.3.5	SNMP Trap Commands.....	153
6.3.5.1	show snmptrap	153
6.3.5.2	snmp trap link-status.....	153
6.3.5.3	snmptrap <name> <ipaddr>	155
6.3.5.4	snmptrap ipaddr.....	155
6.3.5.5	snmptrap mode.....	156
6.3.6	HTTP commands.....	156
6.3.6.1	show ip http.....	156
6.3.6.2	ip javamode	157
6.3.6.3	ip http port.....	157
6.3.6.4	ip http server	158
6.3.6.5	ip http secure-port.....	159
6.3.6.6	ip http secure-server	159
6.3.6.7	ip http secure-protocol	159
6.3.7	Secure Shell (SSH) Commands	160
6.3.7.1	show ip ssh	160
6.3.7.2	ip ssh	161
6.3.7.3	ip ssh protocol.....	161
6.3.7.4	ip ssh maxsessions.....	162

6.3.7.5	ip ssh timeout.....	162
6.3.8	DHCP Client Commands.....	163
6.3.8.1	ip dhcp restart.....	163
6.3.8.2	ip dhcp client-identifier.....	163
6.3.9	DHCP Relay Commands.....	164
6.3.9.1	Show bootpdhcprelay.....	164
6.3.9.2	Bootpdhcprelay maxhopcount.....	165
6.3.9.3	Bootpdhcprelay serverip.....	165
6.4	Spanning Tree Commands.....	166
6.4.1	Show Commands.....	166
6.4.1.1	show spanning-tree.....	166
6.4.1.2	show spanning-tree interface.....	167
6.4.1.3	show spanning-tree vlan.....	168
6.4.1.4	show spanning-tree mst.....	169
6.4.1.5	show spanning-tree summary.....	172
6.4.1.6	show spanning-tree brief.....	173
6.4.2	Configuration Commands.....	173
6.4.2.1	spanning-tree.....	173
6.4.2.2	spanning-tree protocol-migration.....	174
6.4.2.3	spanning-tree configuration.....	174
6.4.2.4	spanning-tree mode.....	175
6.4.2.5	spanning-tree forward-time.....	176
6.4.2.6	spanning-tree hello-time.....	177
6.4.2.7	spanning-tree max-age.....	177
6.4.2.8	spanning-tree max-hops.....	178
6.4.2.9	spanning-tree mst.....	178
6.4.2.10	spanning-tree port mode.....	182
6.4.2.11	spanning-tree edgeport.....	183
6.5	System Log Management Commands.....	183
6.5.1	Show Commands.....	183
6.5.1.1	show logging.....	184
6.5.2	show logging buffered.....	184
6.5.3	show logging traplog.....	185
6.5.3.1	show logging hosts.....	185
6.5.4	Configuration Commands.....	186
6.5.4.1	logging buffered.....	186
6.5.4.2	logging console.....	187

6.5.4.3	logging host	188
6.5.4.4	logging syslog	189
6.5.4.5	clear logging buffered	190
6.6	Script Management Commands	190
6.6.1	script apply	190
6.6.2	script delete	191
6.6.3	script list	191
6.6.4	script show	192
6.7	User Account Management Commands	192
6.7.1	Show Commands	193
6.7.1.1	show users	193
6.7.2	Configuration Commands	193
6.7.2.1	username	193
6.7.2.2	username snmpv3 authentication	194
6.7.2.3	username snmpv3 encryption	195
6.8	Security Commands	196
6.8.1	Show Commands	196
6.8.1.1	show users authentication	196
6.8.1.2	show authentication	196
6.8.1.3	show authentication users	197
6.8.1.4	show dot1x	197
6.8.1.5	show dot1x detail	198
6.8.1.6	show dot1x statistics	199
6.8.1.7	show dot1x summary	200
6.8.1.8	show dot1x users	201
6.8.1.9	show radius-servers	201
6.8.1.10	show radius	202
6.8.1.11	show radius accounting	202
6.8.1.12	show radius statistics	203
6.8.1.13	show tacacs	204
6.8.1.14	show port-security	205
6.8.2	Configuration Commands	208
6.8.2.1	authentication login	208
6.8.2.2	username defaultlogin	209
6.8.2.3	username login	209
6.8.3	Dot1x Configuration Commands	210
6.8.3.1	dot1x initialize	210

6.8.3.2	dot1x default-login	210
6.8.3.3	dot1x login	211
6.8.3.4	dot1x system-auth-control	211
6.8.3.5	dot1x user	212
6.8.3.6	dot1x port-control	212
6.8.3.7	dot1x max-req	214
6.8.3.8	dot1x re-authentication	214
6.8.3.9	dot1x re-reauthenticate	215
6.8.3.10	dot1x timeout	215
6.8.4	Radius Configuration Commands	216
6.8.4.1	radius accounting mode	216
6.8.4.2	radius-server host	217
6.8.4.3	radius-sever key	218
6.8.4.4	radius-server retransmit	218
6.8.4.5	radius-server timeout	219
6.8.4.6	radius-server msgauth	220
6.8.4.7	radius-server primary	220
6.8.5	TACACS Configuration Commands	221
6.8.5.1	tacacs	221
6.8.5.2	tacacs mode	221
6.8.5.3	tacacs server-ip	222
6.8.5.4	tacacs port	222
6.8.5.5	tacacs key	223
6.8.5.6	tacacs retry	223
6.8.5.7	tacacs timeout	224
6.8.6	Port Security Configuration Commands	224
6.8.6.1	port-security	224
6.8.6.2	port-security max-dynamic	225
6.8.6.3	port-security max-static	225
6.8.6.4	port-security mac-address	226
6.8.6.5	port-security mac-address move	227
6.9	CDP (Cisco Discovery Protocol) Commands	227
6.9.1	Show Commands	227
6.9.1.1	show cdp	227
6.9.1.2	show cdp neighbors	228
6.9.1.3	show cdp traffic	229
6.9.2	Configuration Commands	229

6.9.2.1	cdp	229
6.9.2.2	cdp run	230
6.9.2.3	cdp timer	230
6.9.2.4	cdp holdtime	231
6.10	SNTP (Simple Network Time Protocol) Commands	231
6.10.1	Show Commands	232
6.10.1.1	show sntp	232
6.10.2	Configuration Commands	233
6.10.2.1	sntp broadcast client poll-interval	233
6.10.2.2	sntp client mode	234
6.10.2.3	sntp client port	235
6.10.2.4	sntp unicast client poll-interval	235
6.10.2.5	sntp unicast client poll-timeout	236
6.10.2.6	sntp unicast client poll-retry	236
6.10.2.7	sntp server	237
6.10.2.8	sntp clock timezone	237
6.11	System Utilities	238
6.11.1	clear	238
6.11.1.1	clear arp	238
6.11.1.2	clear traplog	239
6.11.1.3	clear eventlog	239
6.11.1.4	clear logging buffered	239
6.11.1.5	clear config	240
6.11.1.6	clear pass	240
6.11.1.7	clear counters	241
6.11.1.8	clear dns counter	241
6.11.1.9	clear dns cache	242
6.11.1.10	clear cdp	242
6.11.1.11	clear vlan	242
6.11.1.12	enable passwd	243
6.11.1.13	clear igmp snooping	243
6.11.1.14	clear port-channel	244
6.11.1.15	clear ip filter	244
6.11.1.16	clear dot1x statistics	244
6.11.1.17	clear radius statistics	245
6.11.1.18	clear tacacs	245
6.11.2	copy	246

6.11.3	delete.....	248
6.11.4	dir.....	249
6.11.5	whichboot	249
6.11.6	boot-system.....	250
6.11.7	ping.....	250
6.11.8	traceroute	251
6.11.9	logging cli-command.....	252
6.11.10	calendar set.....	252
6.11.11	reload.....	253
6.11.12	configure.....	253
6.11.13	disconnect	254
6.11.14	hostname.....	254
6.11.15	quit.....	255
6.12	Differentiated Service Command.....	255
6.12.1	General Commands	256
6.12.1.1	diffserv	256
6.12.1.2	no diffserv	257
6.12.2	Class Commands	257
6.12.2.1	class-map	258
6.12.2.2	no class-map	258
6.12.2.3	class-map rename	259
6.12.2.4	match any	259
6.12.2.5	match class-map.....	260
6.12.2.6	no match class-map.....	260
6.12.2.7	match dstip	261
6.12.2.8	match dstl4port	261
6.12.2.9	match ip dscp.....	262
6.12.2.10	match ip precedence	262
6.12.2.11	match ip tos	263
6.12.2.12	match protocol	264
6.12.2.13	match srcip	264
6.12.2.14	match srcl4port	265
6.12.3	Policy Commands.....	265
6.12.3.1	assign-queue	266
6.12.3.2	drop.....	266
6.12.3.3	redirect.....	267
6.12.3.4	conform-color	267

6.12.3.5	mark cos	268
6.12.3.6	class.....	268
6.12.3.7	no class.....	269
6.12.3.8	mark ip-dscp	269
6.12.3.9	mark ip-precedence	269
6.12.3.10	police-simple.....	270
6.12.3.11	policy-map	271
6.12.3.12	policy-map rename	271
6.12.4	Service Commands	271
6.12.4.1	service-policy	272
6.12.4.2	no service-policy	273
6.12.5	Show Commands	273
6.12.5.1	show class-map	273
6.12.5.2	show diffserv	275
6.12.5.3	show policy-map	275
6.12.5.4	show diffserv service	277
6.12.5.5	show diffserv service brief	278
6.12.5.6	show policy-map interface	278
6.12.5.7	show service-policy.....	280
6.13	ACL Command	280
6.13.1	Show Commands	280
6.13.1.1	show mac access-lists	280
6.13.1.2	show mac access-lists	281
6.13.1.3	show ip access-lists	282
6.13.1.4	show access-lists interface	283
6.13.2	Configuration Commands.....	283
6.13.2.1	mac access-list extended	283
6.13.2.2	mac access-list extended	284
6.13.2.3	mac access-list	284
6.13.2.4	mac access-group in.....	285
6.13.2.5	access-list.....	286
6.13.2.6	no access-list.....	287
6.13.2.7	ip access-group	287
6.14	CoS (Class of Service) Command	288
6.14.1	Show Commands	288
6.14.1.1	show queue cos-map.....	288
6.14.1.2	show queue ip-precedence-mapping.....	288

6.14.1.3	show queue trust	289
6.14.1.4	show queue cos-queue.....	290
6.14.2	Configuration Commands.....	291
6.14.2.1	queue cos-map	291
6.14.2.2	queue ip-precedence-mapping	292
6.14.2.3	queue trust.....	293
6.14.2.4	queue cos-queue min-bandwidth.....	294
6.14.2.5	queue cos-queue strict	295
6.14.2.6	queue cos-queue traffic-shape	296
6.15	LLDP (Link Layer Discovery Protocol) Commands	298
6.15.1	Show Commands	298
6.15.1.1	show lldp.....	298
6.15.1.2	show lldp interface	298
6.15.1.3	show lldp statistics	299
6.15.1.4	show lldp remote-device	300
6.15.1.5	show lldp remote-device detail	300
6.15.1.6	show lldp local-device	301
6.15.1.7	show lldp local-device detail	302
7	Routing Commands.....	303
7.1	Address Resolution Protocol (ARP) Commands.....	303
7.1.1	Show Commands	303
7.1.1.1	show ip arp	303
7.1.1.2	show ip arp brief	304
7.1.1.3	show ip arp static.....	304
7.1.2	Configuration Commands.....	305
7.1.2.1	arp.....	305
7.1.2.2	ip proxy-arp.....	305
7.1.2.3	arp cachesize.....	306
7.1.2.4	arp dynamicrenew	306
7.1.2.5	arp purge	306
7.1.2.6	arp resptime.....	307
7.1.2.7	arp retries.....	307
7.1.2.8	arp timeout.....	307
7.1.2.9	clear arp-cache	308
7.2	IP Routing Commands	308
7.2.1	Show Commands	308
7.2.1.1	show ip brief.....	308

7.2.1.2	show ip interface port.....	309
7.2.1.3	show ip interface brief.....	310
7.2.1.4	show ip route	310
7.2.1.5	show ip route bestroutes.....	311
7.2.1.6	show ip route entry	311
7.2.1.7	show ip route precedence.....	312
7.2.1.8	show ip traffic.....	313
7.2.2	Configuration Commands.....	313
7.2.2.1	routing.....	313
7.2.2.2	ip routing.....	314
7.2.2.3	ip address	314
7.2.2.4	ip route.....	314
7.2.2.5	ip route default-next-hop.....	315
7.2.2.6	ip route precedence	315
7.2.2.7	ip forwarding	316
7.2.2.8	ip directed-broadcast	316
7.2.2.9	ip mtu	317
7.2.2.10	encapsulation.....	317
7.3	Open Shortest Path First (OSPF) Commands	318
7.3.1	Show Commands	318
7.3.1.1	show ip ospf.....	318
7.3.1.2	show ip ospf area.....	319
7.3.1.3	show ip ospf database	320
7.3.1.4	show ip ospf interface	320
7.3.1.5	show ip ospf interface brief	321
7.3.1.6	show ip ospf interface stats.....	322
7.3.1.7	show ip ospf neighbor	322
7.3.1.8	show ip ospf neighbor brief	324
7.3.1.9	show ip ospf range.....	324
7.3.1.10	show ip ospf stub table	325
7.3.1.11	show ip ospf virtual-link.....	326
7.3.1.12	show ip ospf virtual-link brief.....	326
7.3.2	Configuration Commands.....	327
7.3.2.1	enable.....	327
7.3.2.2	no area.....	328
7.3.2.3	ip ospf	328
7.3.2.4	1583compatibility	328

7.3.2.5	area default-cost	329
7.3.2.6	area nssa	329
7.3.2.7	area nssa default-info-originate	330
7.3.2.8	area nssa no-redistribute	330
7.3.2.9	area nssa no-summary	331
7.3.2.10	area nssa translator-role	331
7.3.2.11	area nssa translator-stab-intv	332
7.3.2.12	area range	332
7.3.2.13	area stub	333
7.3.2.14	area stub summarylsa	333
7.3.2.15	area virtual-link authentication	334
7.3.2.16	area virtual-link dead-interval	335
7.3.2.17	area virtual-link hello-interval	335
7.3.2.18	area virtual-link retransmit-interval	336
7.3.2.19	area virtual-link transmit-delay	336
7.3.2.20	default-information originate	337
7.3.2.21	default-metric	337
7.3.2.22	distance ospf	338
7.3.2.23	distribute-list out	339
7.3.2.24	exit-overflow-interval	339
7.3.2.25	external-lsdb-limit	340
7.3.2.26	ip ospf areaid	340
7.3.2.27	ip ospf authentication	341
7.3.2.28	ip ospf cost	342
7.3.2.29	ip ospf dead-interval	342
7.3.2.30	ip ospf hello -interval	343
7.3.2.31	ip ospf priority	343
7.3.2.32	ip ospf retransmit-interval	344
7.3.2.33	ip ospf transmit-delay	344
7.3.2.34	ip ospf mtu-ignore	345
7.3.2.35	router-id	346
7.3.2.36	redistribute	346
7.3.2.37	maximum-paths	347
7.4	Bootp/DHCP Relay Commands	347
7.4.1	show bootpdhcprelay	347
7.4.2	bootpdhcprelay cidoptmode	348
7.4.3	bootpdhcprelay enable	348

7.4.4	bootpdhcprelay maxhopcount	349
7.4.5	bootpdhcprelay minwaittime	349
7.4.6	bootpdhcprelay serverip	350
7.4.7	ip dhcp restart.....	350
7.4.8	ip dhcp client-identifier.....	350
7.5	Domain Name Server Relay Commands	351
7.5.1	Show Commands	351
7.5.1.1	show hosts.....	351
7.5.1.2	show dns.....	351
7.5.1.3	show dns cache	352
7.5.2	Configuration Commands.....	353
7.5.2.1	ip hosts	353
7.5.2.2	clear hosts	353
7.5.2.3	ip domain-name	354
7.5.2.4	ip domain-list.....	354
7.5.2.5	ip name-server.....	355
7.5.2.6	ip domain-lookup	355
7.5.2.7	clear domain-list.....	356
7.5.2.8	clear dns	356
7.5.2.9	clear dns cache.....	357
7.5.2.10	clear dns counter	357
7.6	Routing Information Protocol (RIP) Commands	357
7.6.1	Show Commands	358
7.6.1.1	show ip rip.....	358
7.6.1.2	show ip rip interface.....	358
7.6.1.3	show ip rip interface brief.....	359
7.6.2	Configuration Commands.....	360
7.6.2.1	enable rip	360
7.6.2.2	ip rip	360
7.6.2.3	auto-summary.....	361
7.6.2.4	default-information originate	361
7.6.2.5	default-metric	362
7.6.2.6	distance rip	362
7.6.2.7	hostrouteaccept	363
7.6.2.8	split-horizon	363
7.6.2.9	distribute-list.....	364
7.6.2.10	redistribute	365

7.6.2.11	ip rip authentication.....	365
7.6.2.12	ip rip receive version.....	366
7.6.2.13	ip rip send version.....	367
7.7	Router Discovery Protocol Commands	367
7.7.1	show ip irdp	367
7.7.2	ip irdp.....	368
7.7.3	ip irdp broadcast.....	368
7.7.4	ip irdp holdtime	369
7.7.5	ip irdp maxadvertinterval	369
7.7.6	ip irdp minadvertinterval	370
7.7.7	ip irdp preference.....	370
7.8	VLAN Routing Commands	371
7.8.1	show ip vlan.....	371
7.8.2	vlan routing.....	371
7.9	Virtual Router Redundancy Protocol (VRRP) Commands	372
7.9.1	Show Commands	372
7.9.1.1	show ip vrrp	372
7.9.1.2	show ip vrrp brief	372
7.9.1.3	show ip vrrp interface.....	373
7.9.1.4	show ip vrrp interface stats	374
7.9.2	Configuration Commands.....	375
7.9.2.1	ip vrrp.....	375
7.9.2.2	ip vrrp ip.....	376
7.9.2.3	ip vrrp mode.....	376
7.9.2.4	ip vrrp authentication	377
7.9.2.5	ip vrrp preempt.....	377
7.9.2.6	ip vrrp priority	378
7.9.2.7	ip vrrp timers advertise	378
8	IP Multicast Commands.....	379
8.1	Distance Vector Multicast Routing Protocol (DVMRP) Commands.....	379
8.1.1	Show Commands	379
8.1.1.1	show ip dvmrp.....	379
8.1.1.2	show ip dvmrp interface.....	379
8.1.1.3	show ip dvmrp neighbor.....	380
8.1.1.4	show ip dvmrp nexthop.....	381
8.1.1.5	show ip dvmrp prune	381
8.1.1.6	show ip dvmrp route	382

8.1.2	Configuration Commands.....	382
8.1.2.1	ip dvmrp	382
8.1.2.2	ip dvmrp metric	383
8.2	Internet Group Management Protocol (IGMP) Commands	383
8.2.1	Show Commands	383
8.2.1.1	show ip igmp.....	383
8.2.1.2	show ip igmp groups.....	384
8.2.1.3	show ip igmp interface	385
8.2.1.4	show ip igmp interface membership	386
8.2.1.5	show ip igmp interface stats	387
8.2.2	Configuration Commands.....	387
8.2.2.1	ip igmp	387
8.2.2.2	ip igmp version.....	388
8.2.2.3	ip igmp last-member-query-count.....	388
8.2.2.4	ip igmp last-member-query-interval	389
8.2.2.5	ip igmp query-interval	389
8.2.2.6	ip igmp query-max-response-time	390
8.2.2.7	ip igmp robustness.....	390
8.2.2.8	ip igmp startup-query-count.....	391
8.2.2.9	ip igmp startup-query-interval	391
8.3	Multicast Commands.....	392
8.3.1	Show Commands	392
8.3.1.1	show ip mcast.....	392
8.3.1.2	show ip mcast boundary	393
8.3.1.3	show ip mcast interface	393
8.3.1.4	show ip mcast mroute	394
8.3.1.5	show mrinfo	397
8.3.1.6	show mstat.....	397
8.3.1.7	show mtrace	398
8.3.2	Configuration Commands.....	398
8.3.2.1	ip multicast.....	399
8.3.2.2	ip multicast staticroute	399
8.3.2.3	no ip mcast mroute	400
8.3.2.4	ip mcast boundary	401
8.3.2.5	ip multicast ttl-threshold.....	401
8.3.2.6	mrinfo.....	402
8.3.2.7	mstat	402

8.3.2.8	mtrace	403
8.3.2.9	disable ip multicast mdebug mtrace	404
8.4	Protocol Independent Multicast – Dense Mode (PIM-DM) Commands	404
8.4.1	Show Commands	404
8.4.1.1	show ip pimdm	404
8.4.1.2	show ip pimdm interface	405
8.4.1.3	show ip pimdm interface stats	406
8.4.1.4	show ip pimdm neighbor	406
8.4.2	Configuration Commands	407
8.4.2.1	ip pimdm	407
8.4.2.2	ip pimdm mode	407
8.4.2.3	ip pimdm query-interval	408
8.5	Protocol Independent Multicast – Sparse Mode (PIM-SM) Commands	408
8.5.1	Show Commands	408
8.5.1.1	show ip pimsm	408
8.5.1.2	show ip pimsm componenttable	409
8.5.1.3	show ip pimsm interface	410
8.5.1.4	show ip pimsm interface stats	410
8.5.1.5	show ip pimsm neighbor	411
8.5.1.6	show ip pimsm rp	412
8.5.1.7	show ip pimsm rphash	413
8.5.1.8	show ip pimsm staticrp	413
8.5.2	Configuration Commands	414
8.5.2.1	ip pimsm	414
8.5.2.2	ip pimsm message-interval	414
8.5.2.3	ip pimsm register-rate-limit	415
8.5.2.4	ip pimsm spt-threshold	415
8.5.2.5	ip pimsm staticrp	416
8.5.2.6	ip pimsm mode	416
8.5.2.7	ip pimsm query-interval	417
8.5.2.8	ip pimsm cbsrpreference	417
8.5.2.9	ip pimsm cbsrhashmasklength	418
8.5.2.10	ip pimsm crppreference	418
9	Rapid Super Ring Member Mode Commands	420
9.1	Global Configuration	420
9.2	Rapid Super Ring Configuration	420
9.3	Rapid Super Ring Summary	421

10	Stacking Commands.....	422
10.1	show switch	422
10.2	show supported switchtype	423
10.3	switch provision	424
10.4	switch priority.....	424
10.5	switch renumber	425
10.6	switch movemanagement.....	425
10.7	archive copy-sw.....	426
10.8	archive download-sw	427
10.9	reload	427
10.10	session	428
11	Web-Based Management Interface	429
11.1	Overview	429
11.2	Main Menu.....	430
11.2.1	System Menu.....	430
11.2.1.1	View ARP Cache	430
11.2.1.2	Viewing Inventory Information	430
11.2.1.3	Configuring Management Session and Network Parameters.....	432
11.2.1.4	Defining Forwarding Database	442
11.2.1.5	Viewing Logs	444
11.2.1.6	Managing Switch Interface	449
11.2.1.7	Defining SNMP	455
11.2.1.8	Viewing Statistics	458
11.2.1.9	Managing System Utilities	468
11.2.1.10	Defining Trap Manager	475
11.2.1.11	Configuring SNTP.....	477
11.2.1.12	Defining DHCP Client	484
11.2.2	Switching Menu	485
11.2.2.1	Managing Port-based VLAN	485
11.2.2.2	Managing Protocol-based VLAN	490
11.2.2.3	Defining GARP	492
11.2.2.4	Managing IGMP Snooping.....	495
11.2.2.5	Managing Port-Channel.....	503
11.2.2.6	Viewing Multicast Forwarding Database.....	506
11.2.2.7	Managing Spanning Tree.....	509
11.2.2.8	Defining 802.1p priority	517
11.2.2.9	Managing Port Security	518

11.2.2.10	Managing LLDP (Link Layer Discovery Protocol)	521
11.2.3	Routing Menu	527
11.2.3.1	Managing ARP Table	527
11.2.3.2	Managing IP Interfaces	529
11.2.3.3	Managing OSPF	535
11.2.3.4	Managing BOOTP/DHCP Relay Agent	556
11.2.3.5	Managing DNS Relay	558
11.2.3.6	Managing Routing Information Protocol (RIP)	562
11.2.3.7	Managing Router Discovery	569
11.2.3.8	Managing Route Table	571
11.2.3.9	Managing VLAN Routing	576
11.2.3.10	Managing VRRP	578
11.2.4	Security Menu	583
11.2.4.1	Managing Access Control (802.1x)	583
11.2.4.2	Managing RADIUS	592
11.2.4.3	Defining TACACS Configuration	598
11.2.4.4	Defining IP Filter Configuration	599
11.2.4.5	Defining Secure Http Configuration	600
11.2.4.6	Defining Secure Shell Configuration	601
11.2.5	QOS Menu	602
11.2.5.1	Managing Access Control Lists	602
11.2.5.2	Managing Differentiated Services	611
11.2.5.3	Configuring Diffserv Wizard Page	618
11.2.5.4	Managing Class of Service	619
11.2.6	IP Multicast Menu	624
11.2.6.1	Managing DVMRP Protocol	624
11.2.6.2	Managing IGMP Protocol	629
11.2.6.3	Defining Multicast Configuration	635
11.2.6.4	Configuring Multicast Mdebug	640
11.2.6.5	Managing PIM-DM Protocol	644
11.2.6.6	Managing PIM-SM Protocol	647
11.2.7	Rapid Super Ring Menu	652
11.2.7.1	Global Configuration	652
11.2.7.2	Rapid Super Ring Configuration	653
11.2.7.3	Rapid Super Ring Summary	653
11.2.8	Stacking Menu	654
11.2.8.1	Configuring Stack Unit	654

11.2.8.2	Downloading Runtime Image to Stack Members.....	656
11.2.8.3	Viewing Stack Summary Information	657
11.2.8.4	Viewing Stack Port Summary Information.....	657
11.2.8.5	Viewing Stack Port Counters Information	658
11.2.8.6	Viewing Stack Port Counters Detail Information	659

1 Introduction

1.1 Switch Description

The JetNet 6524G is a 19-inch Gigabit Stackable Layer 3 Managed Switch, equipped with 24 10/100/1000 Base-TX ports and 4 Gigabit SFP combo ports delivering maximum throughput and flexibility for high-density and ultra high-speed connection. With stacking cable installation, up to 8 units can be stacked together, allowing building a single-IP manageable device and simultaneously providing 40G backplane across full duplex stacking links. The flexible interface design allows JetNet 6524G to provide up to 192 Gigabit ports per stack and 384G bandwidth for building intelligent largescale networks.

In addition to the 90-264VAC power-based JetNet 6524G model, Korenix provides the JetNet 6524GDC series, which support 24V or 48V power inputs and feature a FAN-less design with -40~65 °C wide operating temperature for severe industrial applications..

1.2 Features

- Supports 24 10/100/1000BASE-T RJ45 Ethernet ports
- 4 built-in combination 1000BASE-T/SFP ports
- 2 10G backplane for stacking up to 8 units with 192 ports and 384G bandwidth
- Supports IP, VLAN & Multicast routing
- IP Routing protocol supports RIP v1 / v2, OSPF v1/v2
- Supports L3 Multicast, PIM-DM and PIM-SM, DVMRP, IGMP v1/v2/v3
- Virtual Redundant Router Protocol (VRRP) for gateway redundancy
- Supports LLDP and JetView Pro i2NMS for network auto topology visualization and efficient group management
- Multiple Super Ring member mode
- 802.1s Multiple Spanning Tree Protocol and 802.1w RSTP for network redundancy
- Supports 512 VLANs, GVRP/GMRP, protocol VLAN
- 802.3ad LACP, up to 6 trunk groups, unicast and multicast load balance
- Supports L2 / L3 / L4 ACL (access control list)
- IEEE 802.1x Port-Based Authentication, RADIUS and TACACS client, SSH, SSL, TLS, Port binding
- FAN-less design with -40~65 °C wide operating temperature (JetNet 6524G-DC)

1.3 Front-Panel Components

The front panel of the Switch consists of LED indicators, Gigabit Ethernet ports and four SFP (Mini-GBIC) Combo ports.




Figure 1-1. Front Panel View of the switch

Comprehensive LED indicators display the status of the startup Self test/Power, Status (of the stacking master) and the port Link/Activity.

1.4 LED Indicators

The LED indicators of the front panel include Power, Console, and Ethernet Port Link/Act.status. A bank of 24 LEDs (2 for each port) indicates link, activity status, and connection speed for each port.

In the Real panel, the LEDs indicate the Stacking status. A band of 8 ports (4 for each stacking port) indicates Status, RX, TX, Link of the 2 stacking ports.

1.5 Rear Panel Description

The rear panel of the Switch contains an AC power connector or DC power connector, a RS-232 console port, the connector for the two stacking ports. An RS-232 DCE console port is for setting up and managing the Switch via a connection to a console terminal or PC using a terminal emulation program. The default baud rate is [115,200, N, 8, 1](#).



Figure 1-2. Rear panel view of the switch, JetNet 6524G

The AC power connector is a standard three-pronged connector that supports the power cord. Plug the female connector of the provided power cord into this socket, and the male side of the cord into a power outlet. The Switch automatically adjusts its power setting to any supply voltage in the range from 100 ~ 240 VAC at 50 ~ 60 Hz.

The stacking connector is a standard CX4 type with 10G full duplex transmission capability. There are Status, TX, RX and Link LED to indicate the status. See detail description at Ch2.4.

DC Power Input apply to the JetNet 6524G-DC

Follow below steps to wire JetNet 6524G-DC redundant DC power inputs. The power range support 24V(18-36VDC) or 48V(36-72V) DC input. Choose the power input model you preferred.



1. Insert positive and negative wires into V+ and V- contacts respectively of the terminal block connector
2. Tighten the wire-clamp screws to prevent DC wires from being loosened.
3. Power 1 and Power 2 support power redundancy and polarity reverse protection functions.
4. Positive and negative power system inputs are both accepted, but Power 1 and Power 2 must apply the same mode.

Note 1: It is a good practice to turn off input and load power, and to unplug power terminal block before making wire connections. Otherwise, your screwdriver blade can inadvertently short your terminal connections to the grounded enclosure.

Note 2: The range of the suitable DC electric wire is from 12 to 24 AWG.

1.6 Management Options

The system may be managed out-of-band through the console port on the rear panel or in-band using Telnet, a Web Browser, or SNMP.

1.7 Web-based Management Interface

After you have successfully installed the Switch, you can configure the Switch, monitor the LED panel, and display statistics graphically using a Web browser, such as Netscape Navigator (version 6.2 and higher) or Microsoft® Internet Explorer (version 5.0).

The default IP address before configuring is **192.168.2.1**. **User Name is admin**, no default password is requested.

After configured the layer 3 virtual interfaces, you can assign primary IP and second IP addresses to the interface, this is known as default gateway of the lower hosts. The lower hosts in each subnet can access the interface by the default gateway IP address.

The default IP address is only available in layer 2 mode, the layer 2 mode means there is no any configured layer 3 virtual interface. After configured the layer 3 virtual interface, the default IP address is changed to the assigned primary/second IP address of the interface.

NOTE: To access the Switch through a Web browser, the computer running the Web browser must have IP-based network access to the Switch. It is not suggested multiple user's access to the web browser. The performance of web display would be affected.

Warning: Since the lower hosts under the layer 3 interface can access the switch by default gateway IP address. Please remember to change the user name and password in your first login. Otherwise, the users can easily access the management interface and change the settings. It obeys the common security concern.

1.8 Command Line Console Interface Through the Serial Port or Telnet

You can also connect a computer or terminal to the serial console port or use Telnet to access the Switch. The command-line-driven interface provides complete access to all switch management features.

1.9 SNMP-Based Management

You can manage the Switch with an SNMP-compatible console program. The Switch supports SNMP version 1.0, version 2.0, and version 3.0. The SNMP agent decodes the incoming SNMP messages and responds to requests with MIB objects stored in the database. The SNMP agent updates the MIB objects to generate statistics. The Switch supports a comprehensive set of MIB extensions:

- RFC1643 Ether-like MIB
 - RFC1493 Bridge
 - RFC 2819 RMON
- RFC2233 Interface MIB
- RFC2571 (SNMP Frameworks)
- RFC2572 (Message Processing for SNMP)
- RFC2573 (SNMP Applications)
- RFC2576 (Coexistence between SNMPs)
- RFC2618 (Radius-Auth-Client-MIB)
- RFC2620 (Radius-Acc-Client-MIB)
- RFC 1724 (RIPv2-MIB)
- RFC 1850 (OSPF-MIB)
- RFC 1850 (OSPF-TRAP-MIB)
- RFC 2787 (VRRP-MIB)
- RFC 3289 - DIFFSERV-DSCP-TC
- RFC 3289 - DIFFSERV-MIB
- QOS-DIFFSERV-EXTENSIONS-MIB
- QOS-DIFFSERV-PRIVATE-MIB
- RFC2674 802.1p
- RFC 2932 (IPMROUTE-MIB)
- ROUTING-MIB
- MGMD-MIB
- RFC 2934 PIM-MIB
- DVMRP-STD-MIB

IANA-RTPROTO-MIB
MULTICAST-MIB

1.10 Model Name & Packaging

JetNet 6524G 24-Port Gigabit Stackable Layer 3 Managed Ethernet Switch

Includes:

JetNet 6524G (without SFP transceivers)
Rack Mount Kit
Document CD
AC Power Cord

JetNet 6524G-DC24 24-Port Gigabit Stackable Layer 3 Managed Ethernet Switch, 24VDC Power input

Includes:

JetNet 6524G-DC24 (without SFP transceivers)
Rack Mount Kit
Document CD

JetNet 6524G-DC48 24-Port Gigabit Stackable Layer 3 Managed Ethernet Switch, 48VDC Power input

Includes:

JetNet 6524G-DC48 (without SFP transceivers)
Rack Mount Kit
Document CD

JNSC-CX405M-S: JetNet CX4 Stacking Cable, Length : 0.5M, Screw Type

JNSC-CX410M-S: JetNet CX4 Stacking Cable, Length : 1.0M, Screw Type

2 Installation and Quick Startup

2.1 Package Contents

Before you begin installing the Switch, confirm that your package contains the following items:

- One JetNet 6524G Switch
- Mounting kit: 2 mounting brackets and screws
- One AC power cord
- Console Cable
- CD-ROM with User's Guide and CLI Reference

2.2 Switch Installation

Installing the Switch Without the Rack

1. Install the Switch on a level surface that can safely support the weight of the Switch and its attached cables. The Switch must have adequate space for ventilation and for accessing cable connectors.
 2. Set the Switch on a flat surface and check for proper ventilation. Allow at least 5 cm (2 inches) on each side of the Switch and 15 cm (6 inches) at the back for the power cable.
 3. Attach the rubber feet on the marked locations on the bottom of the chassis.
- The rubber feet are recommended to keep the unit from slipping.

2.3 Installing the Switch in a Rack

You can install the Switch in most standard 19-inch (48.3-cm) racks. Refer to the illustrations below.

1. Use the supplied screws to attach a mounting bracket to each side of the Switch.
2. Align the holes in the mounting bracket with the holes in the rack.
3. Insert and tighten two screws through each of the mounting brackets.

Note 1: When installing multiple switches, mount them in the rack one below the other. It's requested to reserve 0.5U-1U free space for multiple switches installing. This is important to disperse the heat generated by the switch.

Note 2: Temperature: Check if the rack environment temperature conforms to the specified operating temperature range.

Note 3: Mechanical Loading: Do no place any equipment on top of the switch

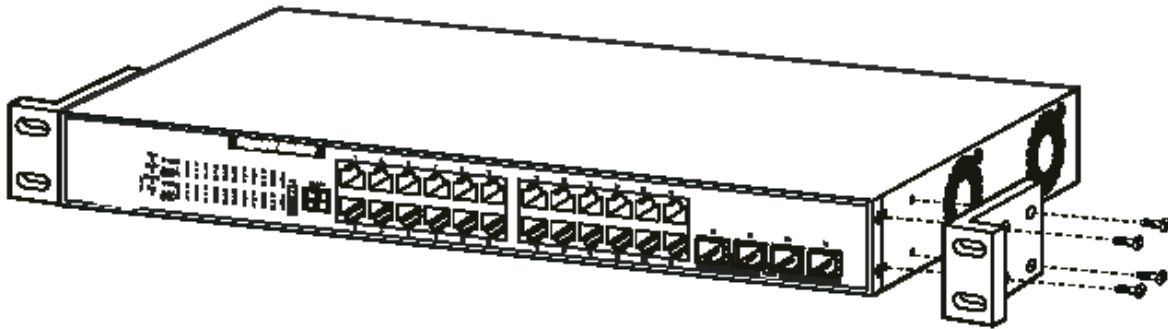


Figure 2-2. Attach mounting brackets

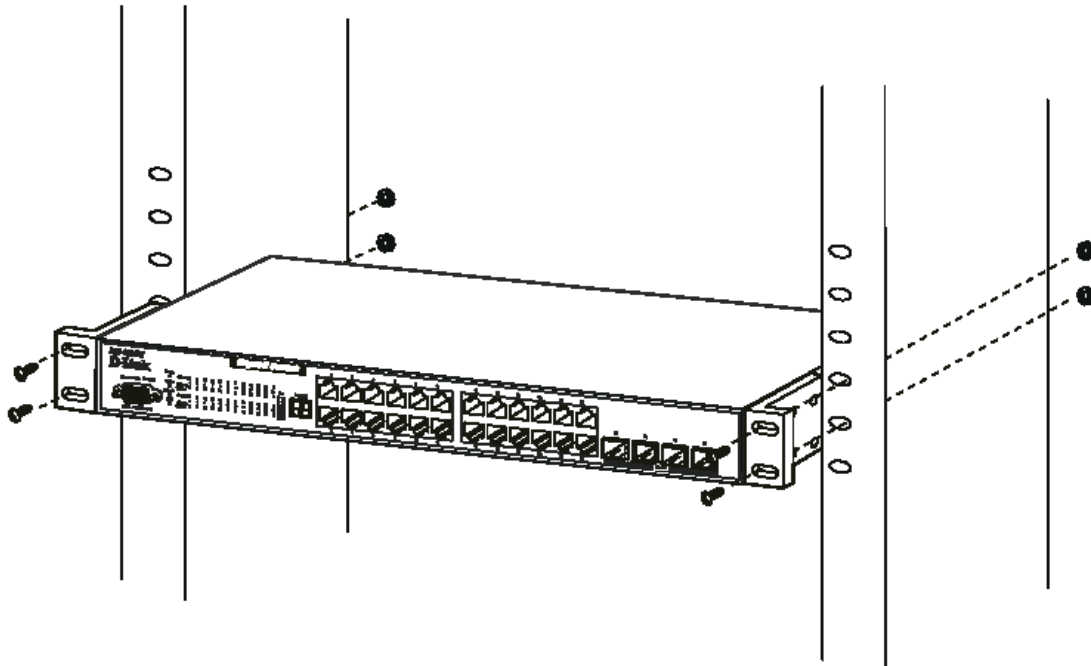


Figure 2-3. Install switch in equipment rack

2.4 Stacking the Switches

A total of 8 switches can be put into a single stack. Stacked JetNet 6524G Switches can be assigned a single IP address using the switch's management software. The stack can then be treated as a single manageable unit with one IP address.

1. Make sure all switches in the stack are powered off.
2. Connect switches through the HighGig ports in the backplane.

3. Power on the switches.
4. The Link LED in the rear panel indicates the link status of the stacking port.

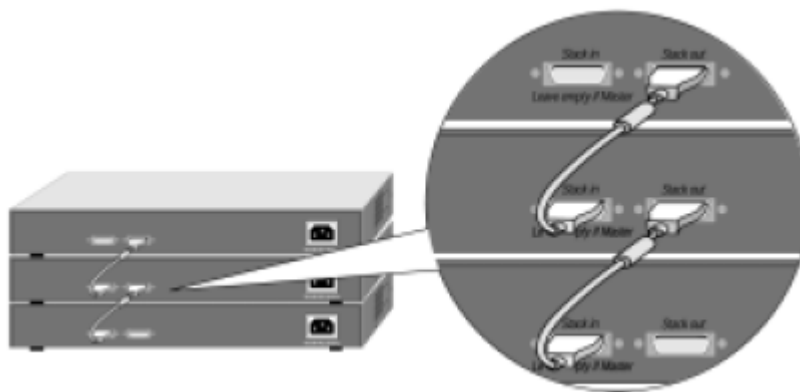


Fig. 2-4: Cabling three JetNet 6524G switches.

Note: Korenix provide the stacking cable for purchasement. When the volume of the stack is under 4, the JNSC-CX405M-S, 50cm stacking cable is enough. When the volume is above 4, additional one JNSC-CX401M-S, 100cm stacking cable is required for the connection from the unit 1 to the last unit.

2.5 Quick Starting the Switch

1. In-band connectivity allows access to the JetNet 6524G Switch locally or from a remote workstation. The device must be configured with IP information (IP address, subnet mask, and default gateway).
2. Turn the Power ON.
3. Allow the device to load the software until the login prompt appears. The device initial state is called the default mode.
4. When the prompt asks for operator login, do the following:
 - Type the word **admin** in the login area. Since a number of the Quick Setup commands require administrator account rights, KORENIX suggests logging into an administrator account.
 - Do not enter a password because there is no password in the default mode.
 - Press the <Enter> key
 - The CLI Privileged EXEC mode prompt will be displayed.
 - Use “configure” to switch to the Global Config mode from Privileged EXEC.
 - Use “exit” to return to the previous mode.

2.6 System Information Setup

2.6.1 Quick Start up Software Version Information

Table 2-1. Quick Start up Software Version Information

Command	Details
show hardware	Allows the user to see the HW & SW version the device contains System Description - switch's model name
show switch	Burned in MAC address - MAC address assigned to this switch CPU

2.6.2 Quick Start up Physical Port Data

Table 2-2. Quick Start up Physical Port

Command	Details
show Interface status { <unit/slot/port> all}	Displays the Ports unit/slot/port Type - Indicates if the port is a special type of port Admin Mode - Selects the Port Control Administration State Physical Mode - Selects the desired port speed and duplex mode Physical Status - Indicates the port speed and duplex mode Link Status - Indicates whether the link is up or down Link Trap - Determines whether or not to send a trap when link status changes LACP Mode - Displays whether LACP is enabled or disabled on this port Flow Mode - Indicates the status of flow control on this port Cap. Status - Indicates the port capabilities during auto-negotiation

2.6.3 Quick Start up User Account Management

Table 2-3. Quick Start up User Account Management

Command	Details
show users	<p>Displays all users that are allowed to access the switch</p> <p>User Access Mode - Shows whether the user is able to change parameters on the switch (Read/Write) or is only able to view (Read Only).</p> <p>As a factory default, admin has Read/Write access and guest has Read Only access. There can only be one Read/Write user and up to 5 Read Only users.</p>
show login session	Displays all login session information
username <username> {passwd nopasswd}	<p>Allows the user to set passwords or change passwords needed to login</p> <p>A prompt will appear after the command is entered requesting the old password. In the absence of an old password leave the area blank. The operator must press enter to execute the command.</p> <p>The system then prompts the user for a new password then a prompt to confirm the new password. If the new password and the confirmed password match a message will be displayed.</p> <p>The user password should not be more than eight characters in length.</p>
copy running-config startup-config [filename]	<p>This will save passwords and all other changes to the device.</p> <p>If you do not save config, all configurations will be lost when a power cycle is performed on the switch or when the switch is reset.</p>

2.6.4 Quick Start up IP Address

To view the network parameters the operator can access the device by the following three methods.

- Simple Network Management Protocol - SNMP
- Telnet
- Web Browser

Table 2-4. Quick Start up IP Address

Command	Details
show ip interface	<p>Displays the Network Configurations</p> <p>IP Address - IP Address of the interface</p> <p>Default IP is 192.168.2.1</p> <p>Subnet Mask - IP Subnet Mask for the interface</p> <p>Default is 255.255.255.0</p> <p>Default Gateway - The default Gateway for this interface</p> <p>Default value is 0.0.0.0</p> <p>Burned in MAC Address - The Burned in MAC Address used for inband connectivity</p> <p>Network Configurations Protocol Current - Indicates which network protocol is being used</p> <p>Default is none</p> <p>Management VLAN ID - Specifies VLAN id without configured any layer 3 virtual interface. After configured layer 3 interface, the management VLAN ID is not available.</p> <p>Web Mode - Indicates whether HTTP/Web is enabled.</p> <p>Java Mode - Indicates whether java mode is enabled.</p>
ip address	<p>(Config)#interface vlan 1</p> <p>(if-vlan 1)#ip address <ipaddr> <netmask></p> <p>(if-vlan 1)#exit</p> <p>(Config)#ip default-gateway <gateway></p> <p>IP Address range from 0.0.0.0 to 255.255.255.255</p> <p>Subnet Mask range from 0.0.0.0 to 255.255.255.255</p>

	Gateway Address range from 0.0.0.0 to 255.255.255.255 Displays all of the login session information
--	--

2.6.5 Quick Start up Uploading from Switch to Out-of-Band PC (Only XMODEM)

Table 2-5. Quick Start up Uploading from Switch to Out-of-Band PC (XMODEM)

Command	Details
copy startup-config <filename> xmodem	This starts the upload and displays the mode of uploading and the type of upload it is and confirms the upload is taking place. For example: If the user is using HyperTerminal, the user must specify where the file is going to be received by the pc.

2.6.6 Quick Start up Downloading from Out-of-Band PC to Switch (Only XMODEM)

Table 2-6 Quick Start up Downloading from Out-of-Band PC to Switch

Command	Details
copy xmodem startup-config <filename>	Sets the download datatype to be an image or config file. The URL must be specified as: xmodem: filepath/ filename For example: If the user is using HyperTerminal, the user must specify which file is to be sent to the switch. The Switch will restart automatically once the code has been downloaded.

2.6.7 Quick Start up Downloading from TFTP Server

Before starting a TFTP server download, the operator must complete the Quick Start up for the IPAddress.

Table 2-7 Quick Start up Downloading from TFTP Server

Command	Details
copy <url> startup-config <filename>	Sets the download datatype to be an image or config file. The URL must be specified as: tftp://ipAddr/filepath/fileName. The startup-config option downloads the config file using tftp and image option downloads the code file.

2.6.8 Quick Start up Factory Defaults

Table 2-8 Quick Start up Factory Defaults

Command	Details
clear config	Enter yes when the prompt pops up to clear all the configurations made to the switch.
copy running-config startup-config [filename]	Enter yes when the prompt pops up that asks if you want to save the configurations made to the switch.
reload	Enter yes when the prompt pops up that asks if you want to reset the system. You can reset the switch or cold boot the switch; both work effectively.

2.6.9 Connecting Devices to the Switch

After assigning IP addresses to the Switch, you can connect devices to the Switch.

To connect a device to an SFP transceiver port:

1. Use your cabling requirements to select an appropriate SFP transceiver type.
2. Insert the SFP transceiver (sold separately) into the SFP transceiver slot.
3. Use the appropriate network cabling to connect a device to the connectors on the SFP transceiver.

3 Console and Telnet Administration Interface

This chapter discusses many of the features used to manage the Switch, and explains many concepts and important points regarding these features. Configuring the Switch to implement these concepts is discussed in detail in chapter 6.

3.1 Local Console Management

Local console management involves the administration of the Switch via a direct connection to the RS-232 DCE console port. This is an Out-of-band connection, meaning that it is on a different circuit than normal network communications, and thus works even when the network is down.

The local console management connection involves a terminal or PC running terminal emulation software to operate the Switch's built-in console program (see Chapter 6). Using the console program, a network administrator can manage, control, and monitor many functions of the Switch. Hardware components in the Switch allow it to be an active part of a manageable network. These components include a CPU, memory for data storage, other related hardware, and SNMP agent firmware. Activities on the Switch can be monitored with these components, while the Switch can be manipulated to carry out specific tasks.

3.2 Set Up your Switch Using Console Access

Out-of-band management requires connecting a terminal, such as a VT-100 or a PC running a terminal-emulation program (such as HyperTerminal, which is automatically installed with Microsoft Windows) to the RS-232 DCE console port of the Switch. Switch management using the RS-232 DCE console port is called *Local Console Management* to differentiate it from management done via management platforms, such as DView or HP OpenView.

Make sure the terminal or PC you are using to make this connection is configured to match these settings. If you are having problems making this connection on a PC, make sure the emulation is set to VT-100 or ANSI. If you still don't see anything, try pressing <Ctrl> + r to refresh the screen.

First-time configuration must be carried out through a console, that is, either (a) a VT100-type serial data terminal, or (b) a computer running communications software set to emulate a VT100. The console must be connected to the Diagnostics port. This is an RS-232 port with a 9-socket D-shell connector and DCE-type wiring. Make the connection as follows:

1. Obtain suitable cabling for the connection.

You can use a null-modem RS-232 cable or an ordinary RS-232 cable and a null-modem adapter. One end of the cable (or cable/adapter combination) must have a 9-pin D-shell connector suitable for the Diagnostics port; the other end must have a connector suitable for the console's serial communications port.

2. Power down the devices, attach the cable (or cable/adapter combination) to the correct ports, and restore power.
3. Set the console to use the following communication parameters for your terminal:

. The console port is set for the following configuration:

. Baud rate: 115,200

- . Data width: 8 bits
- . Parity: none
- . Stop bits: 1
- . Flow Control none

A typical console connection is illustrated below:

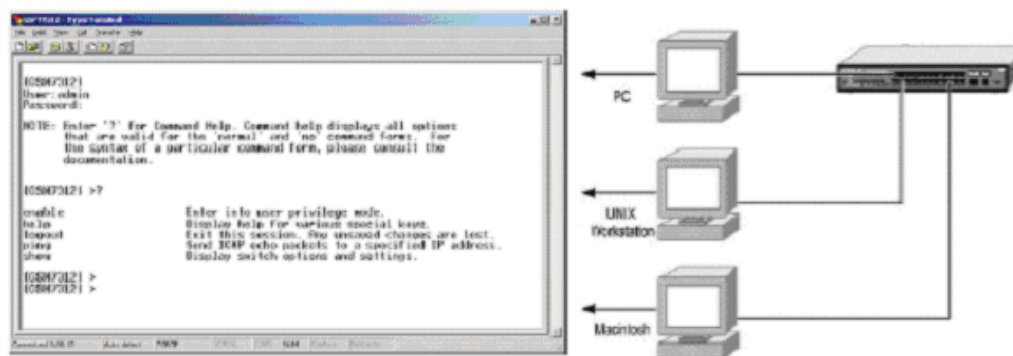


Figure 3-1: Console Setting Environment

3.3 Set Up your Switch Using Telnet Access

Once you have set an IP address for your Switch, you can use a Telnet program (in a VT-100 compatible terminal mode) to access and control the Switch. Most of the screens are identical, whether accessed from the console port or from a Telnet interface.

4 Web-Based Management Interface

4.1 Overview

The Korenix JetNet 6524G provides a built-in browser interface that lets you configure and manage it remotely using a standard Web browser such as Microsoft Internet Explorer 5.0 or later or Netscape Navigator 6.0 or later. This interface also allows for system monitoring and management of the switch. The 'help' page covers many of the basic functions and features of the switch and its Web interface. When you configure the switch for the first time from the console, you can assign an IP address and subnet mask to the switch. Thereafter, you can access the switch's Web interface directly using your Web browser by entering the switch's IP address into the address bar. In this way, you can use your Web browser to manage the switch from a central location, just as if you were directly connected to the switch's console port.

Figure 4-1 shows this management method.

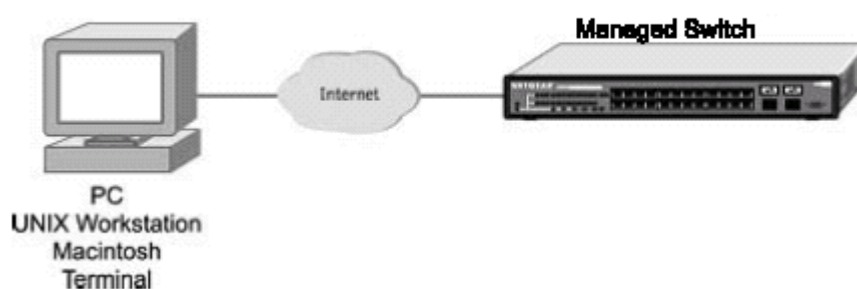


Figure 4-1: Web Management Method

4.2 How to log in

The Korenix JetNet 6524G can be configured remotely from Microsoft Internet Explorer (version 5.0 or above), or Netscape Navigator (version 4.78 or above).

1. Determine the IP address of your managed switch.
2. Open your Web browser.
3. Log in to the managed switch using whatever IP address the unit is currently configured with. Use the default user name of **admin** and default of no password, or whatever LAN address and password you have set up.

A login window opens:

Click the Login link.

A user name and password dialog box opens.

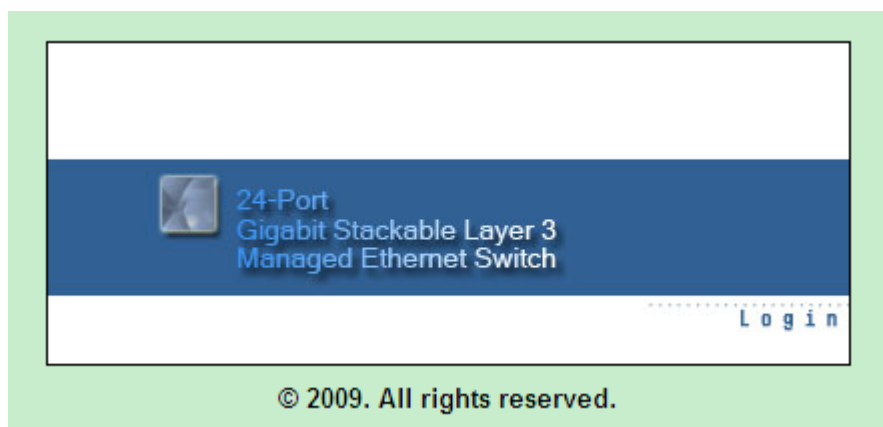


Figure 4-2: Login screen for the Managed Switch

4. Type the default user name of **admin** and default of no password, or whatever password you have set up.

Once you have entered your access point name, your Web browser automatically finds the JetNet 6524G Series Switch and display the home page, as shown below.

4.3 Web-Based Management Menu

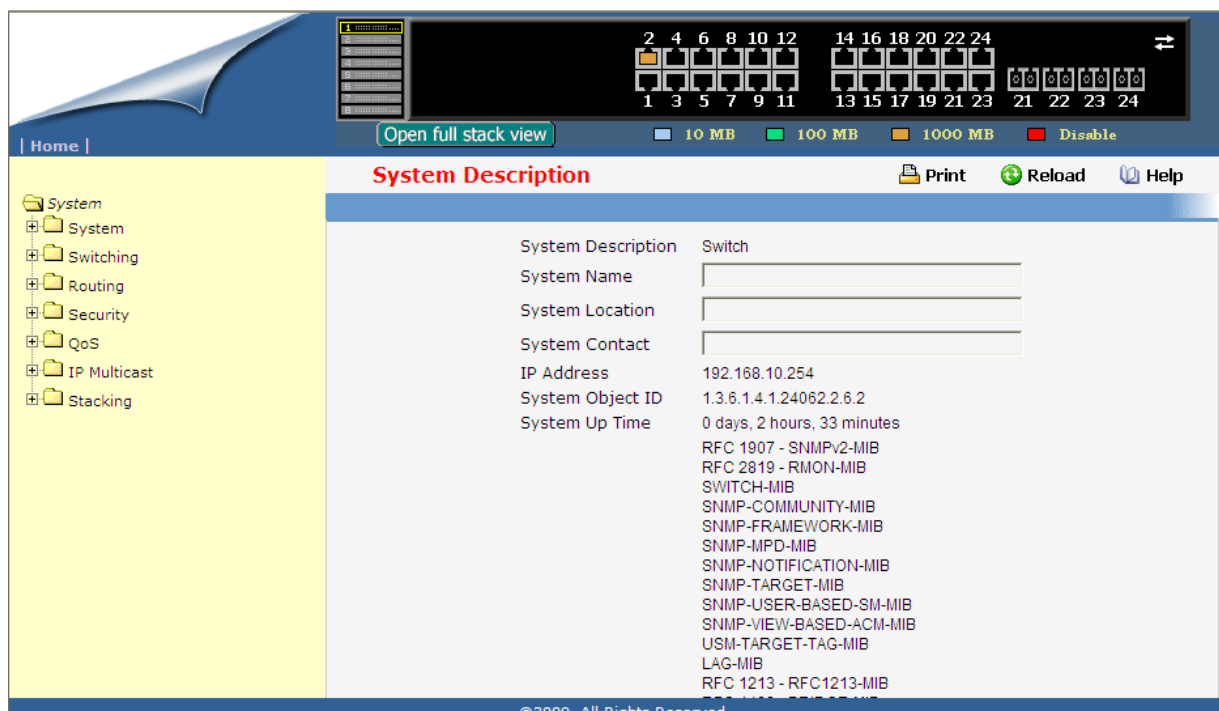


Figure 4-3: System Information page

This above page displays system information, such as:



Click the icon then you can see the rear panel of the switch.




- System Description
- System Name
- System Location
- System Contact
- IP Address
- System Object ID (OID)
- System Up Time
- Supported SNMP MIBs

Menus

The Web-based interface enables navigation through several menus. The main navigation menu is on the left of every page and contains the screens that let you access all the commands and statistics the switch provides.

Main Menus

- System
- Switching
- Routing
- Security
- QoS
- IP Multicast
- Rapid Super Ring
- Stacking

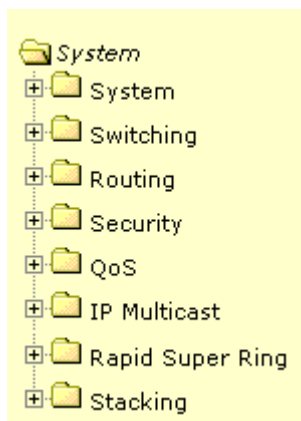

Secondary Menus

The Secondary Menus under the Main Menu contain a host of options that you can use to configure your switch. The online help contains a detailed description of the features on each screen. You can click the 'help' or the question mark at the top right of each screen to view the

help menu topics.

The Secondary Menus are detailed below, with cross-references to the sections in this manual that contain the corresponding command descriptions.

System

- ARP Cache — see “show arp”
- Inventory — see “show hardware”
- Configuration — see “Management Commands and Device Configuration Commands”
- Forwarding Database — see “Device Configuration Commands’ L2MAC Address”
- Logs — see “System Information and Statistics Commands”
- Port — see “Device Configuration Commands’ Interface”
- SNMP — see “SNMP Server Commands and SNMP Trap Commands”
- Statistics — see “show interface counters”
- System Utilities — see “System Utilities”
- Trap Manager — see “show traplog and SNMP Trap Commands”
- SNTTP — see “SNTTP Commands”
- DHCP Client — see “DHCP Client Commands”

Switching

- VLAN — see “VLAN Management Commands”
- Protocol-based VLAN — see “VLAN Management Commands”
- GARP — see “GVRP and Bridge Extension Commands”
- IGMP Snooping — see “IGMP Snooping Commands”
- Port Channel — see “Port Channel Commands”
- Multicast Forwarding DataBase — see “L2 MAC Address and Multicast Forwarding Database Tables Commands”
- Spanning Tree — see “Spanning Tree Commands”
- Class of Service — see “L2 Priority Commands”
- Port Security — see “Port Security Configuration Commands”

Routing

- ARP — see “Address Resolution Protocol (ARP) Commands”
- IP — see “IP Routing Commands”
- OSPF — see “Open Shortest Path First (OSPF) Commands”
- BOOTP/DHCP Relay Agent — see “BOOTP/DHCP Relay Commands”
- DNS Relay — see “Domain Name Server Relay Commands”
- RIP — see “Routing Information Protocol (RIP) Commands”
- Router Discovery — see “Router Discovery Protocol Commands”
- Router — see “IP Routing Commands”
- VLAN Routing — see “VLAN Routing Commands”
- VRRP — see “Virtual Router Redundancy Protocol (VRRP) Commands”

Security

- Port Access Control — see “Dot1x Configuration Commands”
- RADIUS — see “Radius Configuration Commands”
- TACACS — see “TACACS Configuration Commands”
- IP Filter — see “Network Commands”
- Secure HTTP — see “HTTP Commands”
- Secure Shell — see “Secure Shell (SSH) Commands”

QoS

- ACL — see “ACL Commands”
- Diffserv — see “Differentiated Services Commands”
- Class of Service see “Class of Service Commands”

IP Multicast

- DVMRP — see “DVMRP Commands”
- IGMP — see “IGMP Commands”
- Multicast — see “Multicast Commands”
- MDebug — see “Multicast Commands”
- PIM-DM — see “PIM-DM Commands”
- PIM-SM — see “PIM-SM Commands”

Rapid Super Ring

- Global Configuration — see “Rapid Super Ring Commands”
- Rapid Super Ring Configuration — see “Rapid Super Ring Commands”
- Rapid Super Ring Summary — see “Rapid Super Ring Commands”

Stacking

- Unit Configuration — see “Stacking Commands”
- Archive Copy — see “Stacking Commands”
- Stack Summary — see “Stacking Commands”
- Stack Port Summary — see “Stacking Commands”
- Stack Port Counters — see “Stacking Commands”
- Stack Port Counters Detail — see “Stacking Commands”

System-Wide Popup Menus

The JetNet 6524G Switch also provides several popup menus.

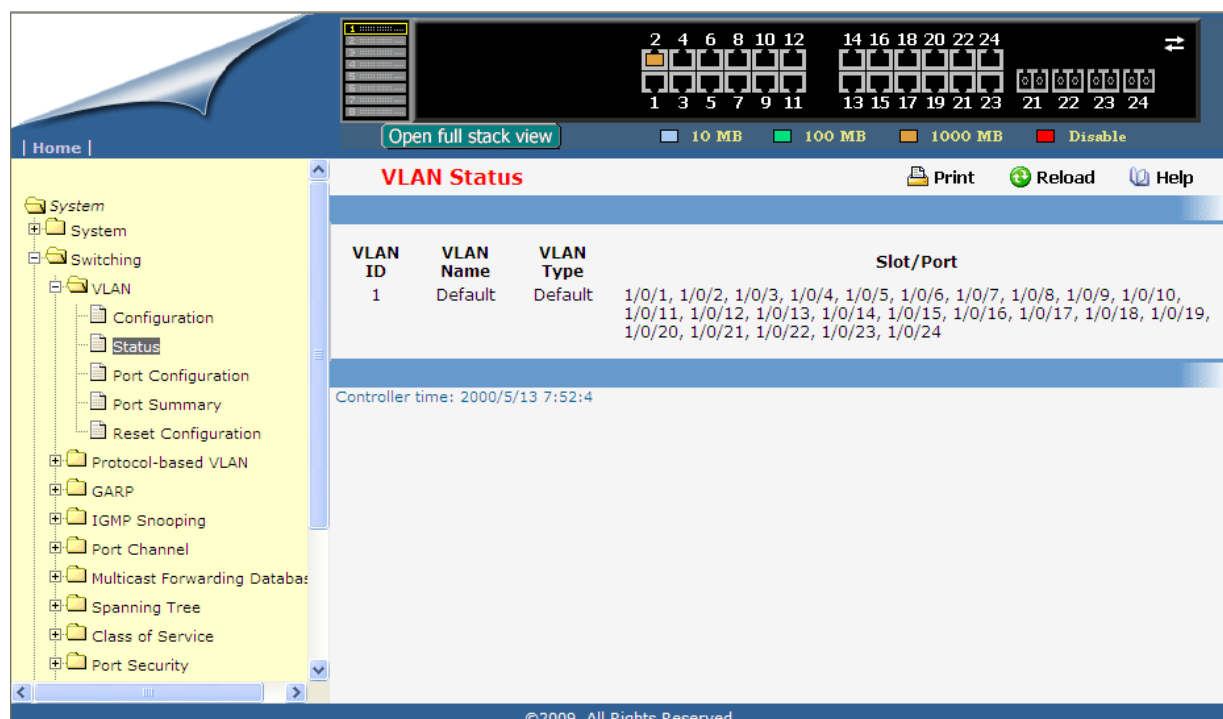


Figure 4-5: Switch popup menus

You can also access the main navigation menu by right clicking on the image of the switch and browsing to the menu you want to use.

Port-Specific Popup Menus

The JetNet 6524G also provides several popup menus for each port.

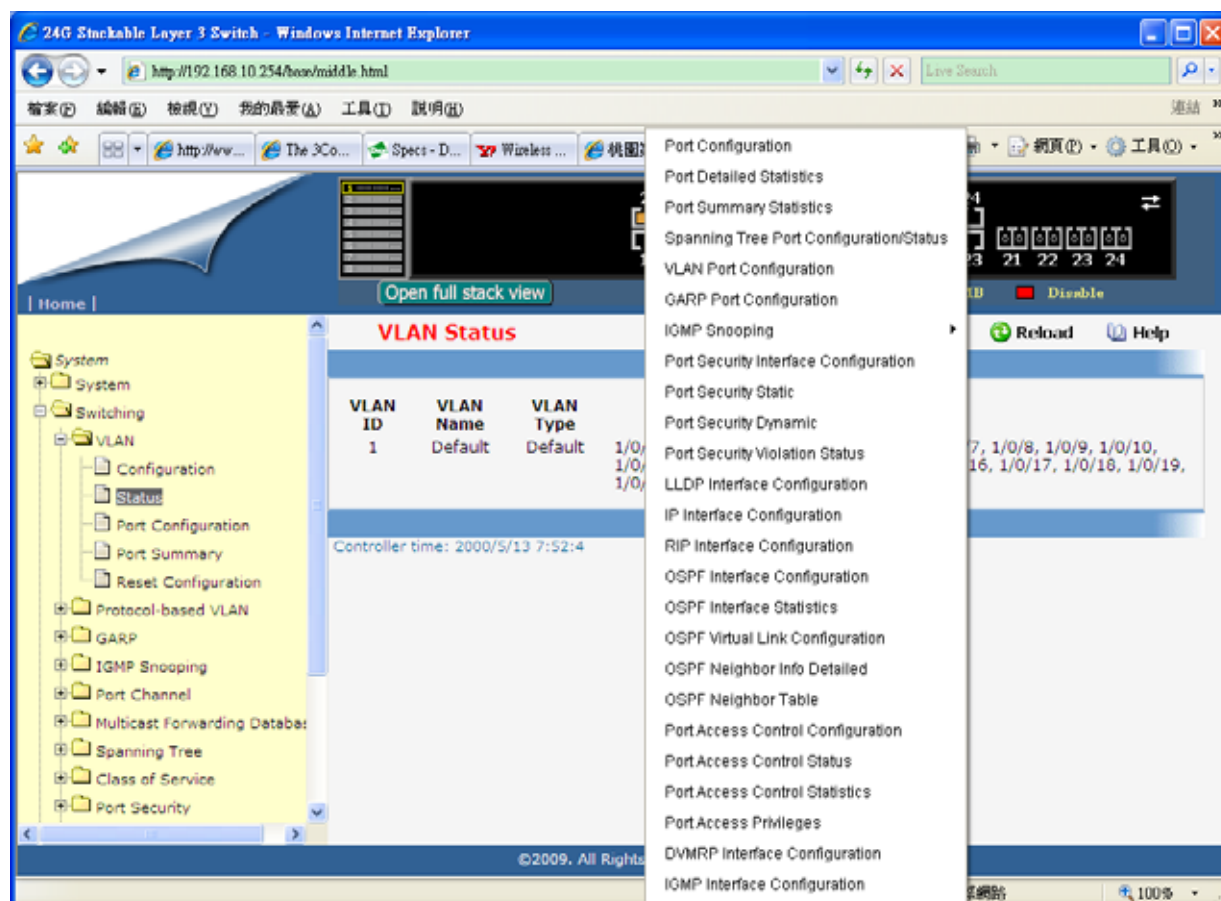


Figure 4-6: Switch popup menus

You can access a port-specific popup menu by right clicking on the port in the image of the switch and browsing to the menu you want to use.

5 Command Line Interface Structure and Mode-based CLI

The Command Line Interface (CLI) syntax, conventions, and terminology are described in this section. Each CLI command is illustrated using the structure outlined below.

5.1 CLI Command Format

Commands are followed by values, parameters, or both.

Example 1

IP address <ipaddr> <netmask> [<gateway>]

- **ip address** is the command name.
- <ipaddr> <netmask> are the required values for the command.
- [<gateway>] is the optional value for the command.

Example 2

snmp-server host <loc>

- **snmp-server location** is the command name.
- <loc> is the required parameter for the command.

Example 3

clear vlan

- **clear vlan** is the command name.

Command

The text in bold, non-italic font must be typed exactly as shown.

5.2 CLI Mode-based Topology

Parameters

Parameters are order dependent.

The text in bold italics should be replaced with a name or number. To use spaces as part of a name parameter, enclose it in double quotes like this: "System Name with Spaces".

Parameters may be mandatory values, optional values, choices, or a combination.

- <parameter>. The <> angle brackets indicate that a mandatory parameter must be entered in place of the brackets and text inside them.
- [parameter]. The [] square brackets indicate that an optional parameter may be entered in place of the brackets and text inside them.
- choice1 | choice2. The | indicates that only one of the parameters should be entered. The {} curly braces indicate that a parameter must be chosen from the list of choices.

Values

ipaddr This parameter is a valid IP address, made up of four decimal bytes ranging from 0 to 255. The default for all IP parameters consists of zeros (that is, 0.0.0.0). The interface IP address of 0.0.0.0 is invalid.

macaddr The MAC address format is six hexadecimal numbers separated by colons, for example 00:06:29:32:81:40.

areaid Area IDs may be entered in dotted-decimal notation (for example, 0.0.0.1). An area ID of 0.0.0.0 is reserved for the backbone. Area IDs have the same form as IP addresses, but are distinct from IP addresses. The IP network number of the sub-netted network may be used for the area ID.

routerid The value of <router id> must be entered in 4-digit dotted-decimal notation (for example, 0.0.0.1). A router ID of 0.0.0.0 is invalid.

unit/slot/port This parameter denotes a valid unit number, slot number, and a valid port number. For example, 1/0/1 represents unit number 1, slot number 0 and port number 1. The <unit/slot/port> field is composed of a valid slot number and a valid port number separated by a forward slash (/).

logical unit/slot/port This parameter denotes a logical unit number, logical slot number, and logical port number assigned. This is applicable in the case of a port-channel (LAG). The operator can use the logical unit number, logical slot number, and the logical port number to configure the port-channel.

Conventions

Network addresses are used to define a link to a remote host, workstation, or network. Network addresses are shown using the following syntax:

Table 5-1. Network Address Syntax

Address Type	Format	Range
IPAddr	A.B.C.D	0.0.0.0 to 255.255.255.255
MacAddr	YY:YY:YY:YY:YY:YY	hexidecimal digit pairs

Double quotation marks such as "System Name with Spaces" set off user defined strings. If the operator wishes to use spaces as part of a name parameter then it must be enclosed in double quotation marks.

Empty strings ("") are not valid user defined strings. Command completion finishes spelling the command when enough letters of a command are typed to uniquely identify the command word. The command may be executed by typing <enter> (command abbreviation) or the command word may be completed by typing the <tab> or <space bar> (command

completion).

The value 'Err' designates that the requested value was not internally accessible. This should never happen and indicates that there is a case in the software that is not handled correctly.

The value of '-----' designates that the value is unknown.

Annotations

The CLI allows the user to type single-line annotations at the command prompt for use when writing test or configuration scripts and for better readability. The exclamation point ('!') character flags the beginning of a comment. The comment flag character can begin a word anywhere on the command line and all input following this character is ignored. Any command line that begins with the character '!' is recognized as a comment line and ignored by the parser.

Some examples are provided below:

```
! Script file for displaying the ip interface  
! Display information about interfaces  
show ip interface 1/0/1 !Displays the information about the first interface  
! Display information about the next interface  
show ip interface 1/0/2  
! End of the script file
```

6 Switching Commands

6.1 System Information and Statistics commands

6.1.1 show arp

This command displays connectivity between the switch and other devices. The Address Resolution Protocol (ARP) cache identifies the MAC addresses of the IP stations communicating with the switch.

Syntax

<code>show arp</code>

Default Setting

None

Command Mode

Privileged Exec

Display Message

MAC Address: A unicast MAC address for which the switch has forwarding and/or filtering information. The format is 6 two-digit hexadecimal numbers that are separated by colons. For example: 00:23:45:67:89:AB

IP Address: The IP address assigned to each interface.

Interface: Valid slot number and a valid port number.

6.1.2 show calendar

This command displays the system clock.

Syntax

<code>show calendar</code>

Default Setting

None

Command Mode

Privileged Exec

Display Message

Current Time displays system time

6.1.3 show eventlog

This command displays the event log, which contains error messages from the system, in the Primary Management System or in the specified unit. The event log is not cleared on a system reset.

Syntax
show eventlog [unit]

unit - The unit number of the remote system. The range is 1 to 8.

Default Setting

None

Command Mode

Privileged Exec

Display Message

File: The file in which the event originated.

Line: The line number of the event.

Task Id: The task ID of the event.

Code: The event code.

Time: The time this event occurred.

Note: Event log information is retained across a switch reset.

6.1.4 show running-config

This command is used to display/capture the current setting of different protocol packages supported on switch. This command displays/captures only commands with settings/configurations with values that differ from the default value. The output is displayed in script format, which can be used to configure another switch with the same configuration. When a script name is provided, the output is redirected to a configuration script. The option [all] will also enable the display/capture of all commands with settings/configurations that include values that are same as the default values. If the optional <scriptname> is provided with a file name extension of “.scr”, the output will be redirected to a script file.

Syntax**show running-config [all] [<scriptname>]**

[all] - enable the display/capture of all commands with settings/configurations that include values that are same as the default values.

<scriptname> - redirect the output to the file <scriptname>.

Default Setting

None

Command Mode

Privileged Exec

6.1.5 show sysinfo

This command displays switch brief information and MIBs supported.

Syntax**show sysinfo****Default Setting**

None

Command Mode

Privileged Exec

Display Message

System Description: The text used to identify this switch.

System Name: The name used to identify the switch.

System Location: The text used to identify the location of the switch. May be up to 31 alpha-numeric characters. The factory default is blank.

System Contact: The text used to identify a contact person for this switch. May be up to 31 alphanumeric characters. The factory default is blank.

System Object ID: The manufacturing ID.

System Up Time: The time in days, hours and minutes since the last switch reboot.

MIBs Supported: A list of MIBs supported by this agent.

6.1.6 show hardware

This command displays inventory information for the switch.

Syntax
show hardware

Default Setting

None

Command Mode

Privileged Exec

Display Message

System Description: Text used to identify the product name of this switch.

Machine Type: Specifies the machine model as defined by the Vital Product Data.

Machine Model: Specifies the machine model as defined by the Vital Product Data.

Serial Number: The unique box serial number for this switch.

Label Revision Number: The label revision serial number of this switch is used for manufacturing purposes.

Part Number: Manufacturing part number.

Hardware Version: The hardware version of this switch. It is divided into four parts. The first byte is the major version and the second byte represents the minor version.

Loader Version: The release version maintenance number of the loader code currently running on the switch. For example, if the release was 1, the version was 2, and the maintenance number was 4, the format would be '1.2.4'.

Boot Rom Version: The release version maintenance number of the boot ROM code currently running on the switch. For example, if the release was 1, the version was 2, and the maintenance number was 4, the format would be '1.2.4'.

Operating Code Version: The release version maintenance number of the code currently running on the switch. For example, if the release was 1, the version was 2, and the maintenance number was 4, the format would be '1.2.4'.

Switch x:

Now temperature: The temperature of switch x.

Fan 1 Status: Status of Fan1. It could be active or inactive.

Fan 2 Status: Status of Fan2. It could be active or inactive.

Note: The following information are shown when you plug in GBIC modules

Switch x GBIC y:

Gigabit Ethernet Compliance Codes: Transceiver's compliance codes.

Vendor Name: The SFP transceiver vendor name shall be the full name of the corporation, a commonly accepted abbreviation of the name of the corporation, the SCSI company code for the corporation, or the stock exchange code for the corporation.

Vendor Part Number: Part number provided by SFP transceiver vendor.

Vendor Serial Number: Serial number provided by vendor.

Vendor Revision Number: Revision level for part number provided by vendor.

Vendor Manufacturing Date: The vendor's manufacturing date.

Additional Packages: This displays the additional packages that are incorporated into this system.

6.1.7 show loginsession

This command displays current telnet and serial port connections to the switch.

Syntax

show loginsession

Default Setting

None

Command Mode

Privileged Exec

Display Message

ID: Login Session ID

User Name: The name the user will use to login using the serial port or Telnet. A new user may be added to the switch by entering a name in a blank entry. The user name may be up to 8 characters, and is not case sensitive. Two users are included as the factory default, admin, and guest.

Connection From: IP address of the telnet client machine or EIA-232 for the serial port connection.

Idle Time: Time this session has been idle.

Session Time: Total time this session has been connected.

Session Type: Shows the type of session: telnet, serial or SSH.

6.2 Device Configuration Commands

6.2.1 Interface

6.2.1.1 show interface status

This command displays the Port monitoring information for the system.

Syntax

show interface status {<unit/slot/port> all}

<unit/slot/port> - is the desired interface number.

all - This parameter displays information for all interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Intf: The physical slot and physical port.

Type: If not blank, this field indicates that this port is a special type of port. The possible values are:

Source - This port is a monitoring port.

PC Mbr - This port is a member of a port-channel (LAG).

Dest - This port is a probe port.

Admin Mode: Selects the Port control administration state. The port must be enabled in order for it to be allowed into the network. – It may be enabled or disabled. The factory default is enabled.

Physical Mode: Selects the desired port speed and duplex mode. If auto-negotiation support is selected, then the duplex mode and speed will be set from the auto-negotiation process. Note that the port's maximum capability (full duplex -100M) will be advertised. Otherwise, this object will determine the port's duplex mode and transmission rate. The factory default is Auto.

Physical Status: Indicates the port speed and duplex mode.

Link Status: Indicates whether the Link is up or down.

Link Trap: This object determines whether to send a trap when link status changes. The factory default is enabled.

LACP Mode: Displays whether LACP is enabled or disabled on this port.

Flow Mode: Displays flow control mode.

Capabilities Status: Displays interface capabilities.

6.2.1.2 show interface counters

This command displays a summary of statistics for a specific interface or all interfaces.

Syntax

```
show interface counters {<unit/slot/port> | all}
```

<unit/slot/port> - is the desired interface number.

all - This command displays statistics information for all interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

The display parameters when the argument is '<unit/slot/port>' are as follows:

Packets Received Without Error: The total number of packets (including broadcast packets and multicast packets) received by the processor.

Packets Received With Error: The number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.

Broadcast Packets Received: The total number of packets received that were directed to the broadcast address. Note that this does not include multicast packets.

Packets Transmitted Without Error: The total number of packets transmitted out of the interface.

Transmit Packets Errors: The number of outbound packets that could not be transmitted because of errors.

Collisions Frames: The best estimate of the total number of collisions on this Ethernet segment.

Time Since Counters Last Cleared: The elapsed time, in days, hours, minutes, and seconds since the statistics for this port were last cleared.

The display parameters when the argument is 'all' are as follows:

Interface: The physical slot and physical port or the logical slot and logical port.

Summary: The summation of the statistics of all ports.

Packets Received Without Error: The total number of packets (including broadcast packets and multicast packets) received.

Packets Received With Error: The number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.

Broadcast Packets Received: The total number of packets received that were directed to the broadcast address. Note that this does not include multicast packets.

Packets Transmitted Without Error: The total number of packets transmitted.

Transmit Packets Errors: The number of outbound packets that could not be transmitted because of errors.

Collisions Frames: The best estimate of the total number of collisions on this Ethernet

segment.

This command displays detailed statistics for a specific port or for all CPU traffic based upon the argument.

Syntax

```
show interface counters detailed {<unit/slot/port> | switchport}
```

<unit/slot/port> - is the desired interface number.

switchport - This parameter specifies whole switch or all interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

The display parameters when the argument is '**<unit/slot/port>**' are as follows:

Total Packets Received (Octets): The total number of octets of data (including those in bad packets) received on the network (excluding framing bits but including FCS octets). This object can be used as a reasonable estimate of Ethernet utilization. If greater precision is desired, the etherStatsPkts and etherStatsOctets objects should be sampled before and after a common interval. The result of this equation is the value Utilization which is the percent utilization of the Ethernet segment on a scale of 0 to 100 percent.

Packets Received 64 Octets: The total number of packets (including bad packets) received that were 64 octets in length (excluding framing bits but including FCS octets).

Packets Received 65-127 Octets: The total number of packets (including bad packets) received that were between 65 and 127 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received 128-255 Octets: The total number of packets (including bad packets) received that were between 128 and 255 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received 256-511 Octets: The total number of packets (including bad packets) received that were between 256 and 511 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received 512-1023 Octets: The total number of packets (including bad packets) received that were between 512 and 1023 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received 1024-1518 Octets: The total number of packets (including bad packets) received that were between 1024 and 1518 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received > 1522 Octets: The total number of packets received that were longer than 1522 octets (excluding framing bits, but including FCS octets) and were otherwise well formed.

Packets RX and TX 64 Octets: The total number of packets (including bad packets) received that were 64 octets in length (excluding framing bits but including FCS octets).

Packets RX and TX 65-127 Octets: The total number of packets (including bad packets) received that were between 65 and 127 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 128-255 Octets: The total number of packets (including bad packets) received that were between 128 and 255 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 256-511 Octets: The total number of packets (including bad packets) received that were between 256 and 511 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 512-1023 Octets: The total number of packets (including bad packets) received that were between 512 and 1023 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 1024-1518 Octets: The total number of packets (including bad packets) received that were between 1024 and 1518 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 1519-1522 Octets: The total number of packets (including bad packets) received that were between 1519 and 1522 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 1523-2047 Octets: The total number of packets (including bad packets) received that were between 1523 and 2047 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 2048-4095 Octets: The total number of packets (including bad packets) received that were between 2048 and 4095 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 4096-9216 Octets: The total number of packets (including bad packets) received that were between 4096 and 9216 octets in length inclusive (excluding framing bits but including FCS octets).

Total Packets Received Without Errors

Unicast Packets Received: The number of subnetwork-unicast packets delivered to a higher-layer protocol.

Multicast Packets Received: The total number of good packets received that were directed to a multicast address. Note that this number does not include packets directed to the broadcast address.

Broadcast Packets Received: The total number of good packets received that were directed to the broadcast address. Note that this does not include multicast packets.

Total Packets Received with MAC Errors

Jabbers Received: The total number of packets received that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either a bad FCS with an integral number of octets (FCS Error) or a bad FCS with a non-integral number of octets (Alignment Error). Note that this definition of jabber is different than the definition in IEEE-802.3 section 8.2.1.5 (10BASE5) and section 10.3.1.4 (10BASE2). These documents define jabber as the condition where any packet exceeds 20 ms. The allowed range to detect jabber is between 20 ms and 150 ms.

Undersize Received: The total number of packets received that were less than 64 octets in length with GOOD CRC(excluding framing bits but including FCS octets).

Fragments Received: The total number of packets received that were less than 64 octets in length with ERROR CRC(excluding framing bits but including FCS octets).

Alignment Errors: The total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, but had a

bad FCS with a non-integral number of octets.

FCS Errors: The total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, but had a bad FCS with an integral number of octets

Overruns: The total number of frames discarded as this port was overloaded with incoming packets, and could not keep up with the inflow.

Total Packets Transmitted (Octets)

Packets Transmitted 64 Octets: The total number of packets (including bad packets) received that were 64 octets in length (excluding framing bits but including FCS octets).

Packets Transmitted 65-127 Octets: The total number of packets (including bad packets) received that were between 65 and 127 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 128-255 Octets: The total number of packets (including bad packets) received that were between 128 and 255 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 256-511 Octets: The total number of packets (including bad packets) received that were between 256 and 511 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 512-1023 Octets: The total number of packets (including bad packets) received that were between 512 and 1023 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 1024-1518 Octets: The total number of packets (including bad packets) received that were between 1024 and 1518 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 1519-1522 Octets: The total number of packets (including bad packets) received that were between 1519 and 1522 octets in length inclusive (excluding framing bits but including FCS octets).

Max Info: The maximum size of the Info (non-MAC) field that this port will receive or transmit.

Total Packets Transmitted Successfully

Unicast Packets Transmitted: The total number of packets that higher-level protocols requested be transmitted to a subnetwork-unicast address, including those that were discarded or not sent.

Multicast Packets Transmitted: The total number of packets that higher-level protocols requested be transmitted to a Multicast address, including those that were discarded or not sent.

Broadcast Packets Transmitted: The total number of packets that higher-level protocols requested be transmitted to the Broadcast address, including those that were discarded or not sent.

Total Transmit Errors

FCS Errors: The total number of packets transmitted that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, but had a bad FCS with an integral number of octets

Tx Oversized: The total number of frames that exceeded the max permitted frame size. This counter has a max increment rate of 815 counts per sec. at 10 Mb/s.

Underrun Errors: The total number of frames discarded because the transmit FIFO buffer became empty during frame transmission.

Total Transmitted Packets Discards

Single Collision Frames: A count of the number of successfully transmitted frames on a particular interface for which transmission is inhibited by exactly one collision.

Multiple Collision Frames: A count of the number of successfully transmitted frames on a particular interface for which transmission is inhibited by more than one collision.

Excessive Collisions: A count of frames for which transmission on a particular interface fails due to excessive collisions.

GVRP PDUs Received: The count of GVRP PDUs received in the GARP layer.

GVRP PDUs Transmitted: The count of GVRP PDUs transmitted from the GARP layer.

GVRP Failed and Registrations: The number of times attempted GVRP registrations could not be completed.

GMRP PDUs received: The count of GMRP PDUs received in the GARP layer.

GMRP PDUs Transmitted: The count of GMRP PDUs transmitted from the GARP layer.

GMRP Failed Registrations: The number of times attempted GMRP registrations could not be completed.

STP BPDUs Transmitted: Spanning Tree Protocol Bridge Protocol Data Units sent.

STP BPDUs Received: Spanning Tree Protocol Bridge Protocol Data Units received.

RSTP BPDUs Transmitted: Rapid Spanning Tree Protocol Bridge Protocol Data Units sent.

RSTP BPDUs Received: Rapid Spanning Tree Protocol Bridge Protocol Data Units received.

MSTP BPDUs Transmitted: Multiple Spanning Tree Protocol Bridge Protocol Data Units sent.

MSTP BPDUs Received: Multiple Spanning Tree Protocol Bridge Protocol Data Units received.

EAPOL Frames Received: The number of valid EAPOL frames of any type that have been received by this authenticator.

EAPOL Frames Transmitted: The number of EAPOL frames of any type that have been transmitted by this authenticator.

Time Since Counters Last Cleared: The elapsed time, in days, hours, minutes, and seconds since the statistics for this port were last cleared.

The display parameters when the argument is 'switchport' are as follows:

Total Packets Received (Octets): The total number of octets of data received by the processor (excluding framing bits but including FCS octets).

Packets Received Without Error: The total number of packets (including broadcast packets and multicast packets) received by the processor.

Unicast Packets Received: The number of subnetwork-unicast packets delivered to a higher-layer protocol.

Multicast Packets Received: The total number of packets received that were directed to a multicast address. Note that this number does not include packets directed to the broadcast address.

Broadcast Packets Received: The total number of packets received that were directed to the broadcast address. Note that this does not include multicast packets.

Receive Packets Discarded: The number of inbound packets which were chosen to be discarded even though no errors had been detected to prevent their being deliverable to a higher-layer protocol. A possible reason for discarding a packet could be to free up buffer space.

Octets Transmitted: The total number of octets transmitted out of the interface, including framing characters.

Packets Transmitted without Errors: The total number of packets transmitted out of the interface.

Unicast Packets Transmitted: The total number of packets that higher-level protocols

requested be transmitted to a subnetwork-unicast address, including those that were discarded or not sent.

Multicast Packets Transmitted: The total number of packets that higher-level protocols requested be transmitted to a Multicast address, including those that were discarded or not sent.

Broadcast Packets Transmitted: The total number of packets that higher-level protocols requested be transmitted to the Broadcast address, including those that were discarded or not sent.

Transmit Packets Discarded: The number of outbound packets which were chosen to be discarded even though no errors had been detected to prevent their being deliverable to a higher-layer protocol. A possible reason for discarding a packet could be to free up buffer space.

Most Address Entries Ever Used: The highest number of Forwarding Database Address Table entries that have been learned by this switch since the most recent reboot.

Address Entries Currently in Use: The number of Learned and static entries in the Forwarding Database Address Table for this switch.

Maximum VLAN Entries: The maximum number of Virtual LANs (VLANs) allowed on this switch.

Most VLAN Entries Ever Used: The largest number of VLANs that have been active on this switch since the last reboot.

Static VLAN Entries: The number of presently active VLAN entries on this switch that have been created statically.

Dynamic VLAN Entries: The number of presently active VLAN entries on this switch that have been created by GVRP registration.

VLAN Deletes: The number of VLANs on this switch that have been created and then deleted since the last reboot.

Time Since Counters Last Cleared: The elapsed time, in days, hours, minutes, and seconds, since the statistics for this switch were last cleared.

6.2.1.3 show interface switch

This command displays a summary of statistics for all CPU traffic.

Syntax

show interface switch

Default Setting

None

Command Mode

Privileged Exec

Display Message

Packets Received Without Error: The total number of packets (including broadcast

packets and multicast packets) received by the processor.

Broadcast Packets Received: The total number of packets received that were directed to the broadcast address. Note that this does not include multicast packets.

Packets Received With Error: The number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.

Packets Transmitted Without Error: The total number of packets transmitted out of the interface.

Broadcast Packets Transmitted: The total number of packets that higher-level protocols requested to be transmitted to the Broadcast address, including those that were discarded or not sent.

Transmit Packet Errors: The number of outbound packets that could not be transmitted because of errors.

Address Entries Currently In Use: The total number of Forwarding Database Address Table entries now active on the switch, including learned and static entries.

VLAN Entries Currently In Use: The number of VLAN entries presently occupying the VLAN table.

Time Since Counters Last Cleared: The elapsed time, in days, hours, minutes, and seconds since the statistics for this switch were last cleared.

6.2.1.4 interface

This command is used to enter Interface configuration mode.

Syntax

interface <unit/slot/port>

<unit/slot/port> - is the desired interface number.

Default Setting

None

Command Mode

Global Config

6.2.1.5 speed-duplex

This command is used to set the speed and duplex mode for the interface.

Syntax

speed-duplex {10 | 100} {full-duplex | half-duplex}

100 - 100BASE-T**10** - 10BASE-T**full-duplex** - Full duplex**half-duplex** - Half duplex**Default Setting**

None

Command Mode

Interface Config

This command is used to set the speed and duplex mode for all interfaces.

Syntax

Speed-duplex all {10 | 100} {full-duplex | half-duplex}

100 - 100BASE-T**10** - 10BASE-T**full - duplex** - Full duplex**half - duplex** - Half duplex**all** - This command represents all interfaces.**Default Setting**

None

Command Mode

Global Config

6.2.1.6 negotiate

This command enables automatic negotiation on a port. The default value is enabled.

Syntax

negotiate no negotiate

no - This command disables automatic negotiation on a port.

Default Setting

Enable

Command Mode

Interface Config

This command enables automatic negotiation on all interfaces. The default value is enabled.

Syntax

negotiate all no negotiate all

all - This command represents all interfaces.

no - This command disables automatic negotiation on all interfaces.

Default Setting

Enable

Command Mode

Global Config

6.2.1.7 capabilities

This command is used to set the capabilities on specific interface.

Syntax

capabilities {{10 100 } {full-duplex half-duplex}} {1000 full-duplex }

no capabilities {{10 100 } {full-duplex half-duplex}} {1000 full-duplex }
--

10 - 10BASE-T

100 - 100BASE-T

1000 - 1000BASE-T

full-duplex - Full duplex

half-duplex - Half duplex

no - This command removes the advertised capability with using parameter.

Default Setting

10 half-duplex, 10 full-duplex, 100 half-duplex, 100 full-duplex, and 1000 full-duplex

Command Mode

Interface Config

This command is used to set the capabilities on all interfaces.

Syntax

capabilities all {{10 100} {full-duplex half-duplex}} {1000 full-duplex }
--

no capabilities all {{10 100} {full-duplex half-duplex}} {1000 full-duplex }

10 - 10BASE-T

100 - 100BASE-T

1000 - 1000BASE-T

full-duplex - Full duplex

half-duplex - Half duplex

all - This command represents all interfaces.

no - This command removes the advertised capability with using parameter

Default Setting

10 half-duplex, 10 full-duplex, 100 half-duplex, 100 full-duplex, and 1000 full-duplex

Command Mode

Global Config

6.2.1.8 storm-control flowcontrol

This command enables 802.3x flow control for the switch.

Note: This command only applies to full-duplex mode ports.

Syntax

```
storm-control flowcontrol  
no storm-control flowcontrol
```

no - This command disables 802.3x flow control for the switch.

Default Setting

Disabled

Command Mode

Global Config

This command enables 802.3x flow control for the specific interface.

Note: This command only applies to full-duplex mode ports.

Syntax

```
storm-control flowcontrol  
no storm-control flowcontrol
```

no - This command disables 802.3x flow control for the specific interface.

Default Setting

Disabled

Command Mode

Interface Config

6.2.1.9 shutdown

This command is used to disable a port.

Syntax

```
shutdown  
no shutdown
```

no - This command enables a port.

Default Setting

Enabled

Command Mode

Interface Config

This command is used to disable all ports.

Syntax

```
shutdown all  
no shutdown all
```

all - This command represents all ports.

no - This command enables all ports.

Default Setting

Enabled

Command Mode

Global Config

6.2.2 L2 MAC Address and Multicast Forwarding Database Tables

6.2.2.1 show mac-addr-table

This command displays the forwarding database entries. If the command is entered with no parameter, the entire table is displayed. This is the same as entering the optional **all** parameter.

Alternatively, the administrator can enter a MAC Address to display the table entry for the requested MAC address and all entries following the requested MAC address.

Syntax

```
show mac-addr-table [{<macaddr> |all}]
```

<macaddr> - enter a MAC Address to display the table entry for the requested MAC address.

all – this command displays the entire table.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Mac Address: A unicast MAC address for which the switch has forwarding and/or filtering information. The format is 6 or 8 two-digit hexadecimal numbers that are separated by colons, for example 01:23:45:67:89:AB. In an IVL system the MAC address will be displayed as 8 bytes. In an SVL system, the MAC address will be displayed as 6 bytes. **Note: This software version only supports IVL systems.**

Interface: The port on which this L2 MAC address was learned.

if Index: This object indicates the if Index of the interface table entry associated with this port.

Status: The status of this entry.

The meanings of the values are:

Static: The value of the corresponding instance was added by the system or a user when a static MAC filter was defined. It cannot be relearned.

Learned: The value of the corresponding instance was learned by observing the source MAC addresses of incoming traffic, and is currently in use.

Management: The value of the corresponding instance (system MAC address) is also the value of an existing instance of dot1dStaticAddress. It is identified with interface 3/1 and is currently used when enabling VLANs for routing.

Self: The value of the corresponding instance is the address of one of the switch's physical interfaces (the system's own MAC address).

GMRP Learned: The value of the corresponding instance was learned via GMRP and applies to Multicast.

Other: The value of the corresponding instance does not fall into one of the other categories.

6.2.2.2 show mac-address-table gmrp

This command displays the GARP Multicast Registration Protocol (GMRP) entries in the

Multicast Forwarding Database (MFDB) table.

Syntax

```
show mac-address-table gmrp
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Mac Address: A unicast MAC address for which the switch has forwarding and/or filtering information. The format is 6 or 8 two-digit hexadecimal numbers that are separated by colons, for example 01:23:45:67:89:AB. In an IVL system the MAC address will be displayed as 8 bytes. In an SVL system, the MAC address will be displayed as 6 bytes. **Note: This software version only supports IVL systems.**

Type: This displays the type of the entry. Static entries are those that are configured by the end user. Dynamic entries are added to the table as a result of a learning process or protocol.

Description: The text description of this multicast table entry.

Interfaces: The list of interfaces that are designated for forwarding (Fwd:) and filtering (Flt:).

6.2.2.3 show mac-address-table igmpsnooping

This command displays the IGMP Snooping entries in the Multicast Forwarding Database (MFDB) table.

Syntax

```
show mac-address-table igmpsnooping
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Mac Address: A unicast MAC address for which the switch has forwarding and/or filtering information. The format is 6 or 8 two-digit hexadecimal numbers that are separated by colons, for example 01:23:45:67:89:AB. In an IVL system the MAC address will be displayed

as 8 bytes. In an SVL system, the MAC address will be displayed as 6 bytes. **Note: This software version only supports IVL systems.**

Type: This displays the type of the entry. Static entries are those that are configured by the end user. Dynamic entries are added to the table as a result of a learning process or protocol.

Description: The text description of this multicast table entry.

Interfaces: The list of interfaces that are designated for forwarding (Fwd:) and filtering (Flt:).

6.2.2.4 show mac-address-table multicast

This command displays the MFDB information. If the command is entered with no parameter, the entire table is displayed. This is the same as entering the *all* parameter. The user can display the table entry for one MAC Address by specifying the MAC address as an optional parameter.

Syntax

```
show mac-address-table multicast {<macaddr> <vlanid> | all }
```

<macaddr> - enter a MAC Address to display the table entry for the requested MAC address

<vlanid> - VLAN ID (Range: 1 – 3965)

all – This command displays the entire table.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Mac Address: A unicast MAC address for which the switch has forwarding and/or filtering information. The format is 6 or 8 two-digit hexadecimal numbers that are separated by colons, for example 01:23:45:67:89:AB. In an IVL system the MAC address will be displayed as 8 bytes. In an SVL system, the MAC address will be displayed as 6 bytes. **Note: This software version only supports IVL systems.**

Type: This displays the type of the entry. Static entries are those that are configured by the end user. Dynamic entries are added to the table as a result of a learning process or protocol.

Source: The component that is responsible for this entry in the Multicast Forwarding Database. Possible values are IGMP Snooping, GMRP, and Static Filtering.

Description: The text description of this multicast table entry.

Interfaces: The list of interfaces that are designated for forwarding (Fwd:) and filtering (Flt:).

Forwarding Interfaces: The resultant forwarding list is derived from combining all the component's forwarding interfaces and removing the interfaces that are listed as the static filtering interfaces.

6.2.2.5 show mac-address-table stats

This command displays the MFDB statistics.

Syntax

show mac-address-table stats

Default Setting

None

Command Mode

Privileged Exec

Display Message

Max MFDB Table Entries: This displays the total number of entries that can possibly be in the MFDB.

Most MFDB Entries Since Last Reset: This displays the largest number of entries that have been present in the Multicast Forwarding Database table. This value is also known as the MFDB high-water mark.

Current Entries: This displays the current number of entries in the Multicast Forwarding Database table.

6.2.2.6 show mac-address-table agetime

This command displays the forwarding database address aging timeout.

Syntax

show mac-address-table agetime

Default Setting

None

Command Mode

Privileged Exec

Display Message

Address Aging Timeout: This displays the total number of seconds for Forwarding Database table.

6.2.2.7 mac-address-table aging-time

This command configures the forwarding database address aging timeout in seconds.

Syntax

<pre>mac-address-table aging-time <10-1000000> no mac-address-table aging-time <10-1000000></pre>

<10-1000000> - aging-time (Range: 10-1000000) in seconds

no - This command sets the forwarding database address aging timeout to 300 seconds.

Default Setting

300

Command Mode

Global Config

6.2.3 VLAN Management

6.2.3.1 show vlan

This command displays brief information on a list of all configured VLANs.

Syntax

<pre>show vlan</pre>

Default Setting

None

Command Mode

Privileged Exec

Display Message

VLAN ID: There is a VLAN Identifier (vlanid) associated with each VLAN. The range of the VLAN ID is 1 to 3965.

VLAN Name: A string associated with this VLAN as a convenience. It can be up to 16 alphanumeric characters, including blanks. The default is blank. VLAN ID 1 is always named 'Default'. This field is optional.

VLAN Type: Type of VLAN, which can be Default, (VLAN ID = 1), can be static (one that is configured and permanently defined), or Dynamic (one that is created by GVRP registration).

Interface(s): Indicates by slot id and port number which port belongs to this VLAN.

6.2.3.2 show vlan id

This command displays detailed information, including interface information, for a specific VLAN.

Syntax

```
show vlan {id <vlanid> | name <vlanname>}
```

<vlanid> - VLAN ID (Range: 1 – 3965)

<vlanname> - vlan name (up to 16 alphanumeric characters)

Default Setting

None

Command Mode

Privileged Exec

Display Message

VLAN ID: There is a VLAN Identifier (VID) associated with each VLAN. The range of the VLAN ID is 1 to 3965.

VLAN Name: A string associated with this VLAN as a convenience. It can be up to 16 alphanumeric characters, including blanks. The default is blank. VLAN ID 1 is always named 'Default'. This field is optional.

VLAN Type: Type of VLAN, which can be Default, (VLAN ID = 1), can be static (one that is configured and permanently defined), or Dynamic (one that is created by GVRP registration).

Unit/slot/port: Indicates by slot id and port number which port is controlled by the fields on this line.

It is possible to set the parameters for all ports by using the selectors on the top line.

Current: Determines the degree of participation of this port in this VLAN. The permissible values are:

Include: This port is always a member of this VLAN. This is equivalent to registration fixed in the IEEE 802.1Q standard.

Exclude: This port is never a member of this VLAN. This is equivalent to registration forbidden in the IEEE 802.1Q standard.

Autodetect: Specifies to allow the port to be dynamically registered in this VLAN via

GVRP. The port will not participate in this VLAN unless a join request is received on this port. This is equivalent to registration normal in the IEEE 802.1Q standard.

Configured: Determines the configured degree of participation of this port in this VLAN. The permissible values are:

Include: This port is always a member of this VLAN. This is equivalent to registration fixed in the IEEE 802.1Q standard.

Exclude: This port is never a member of this VLAN. This is equivalent to registration forbidden in the IEEE 802.1Q standard.

Autodetect: Specifies to allow the port to be dynamically registered in this VLAN via GVRP. The port will not participate in this VLAN unless a join request is received on this port. This is equivalent to registration normal in the IEEE 802.1Q standard.

Tagging: Select the tagging behavior for this port in this VLAN.

Tagged: Specifies to transmit traffic for this VLAN as tagged frames.

Untagged: Specifies to transmit traffic for this VLAN as untagged frames.

6.2.3.3 show protocol group

This command displays the Protocol-Based VLAN information for either the entire system, or for the indicated Group.

Syntax

show protocol group {<group-name> all}

<group-name> - The group name of an entry in the Protocol-based VLAN table.

all – Displays the entire table.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Group Name: This field displays the group name of an entry in the Protocol-based VLAN table.

Group ID: This field displays the group identifier of the protocol group.

Protocol(s): This field indicates the type of protocol(s) for this group.

VLAN: This field indicates the VLAN associated with this Protocol Group.

Interface(s): This field lists the unit/slot/port interface(s) that are associated with this Protocol Group.

6.2.3.4 show interface switchport

This command displays VLAN port information.

Syntax

```
show interface switchport {<unit/slot/port> | all}
```

<unit/slot/port> - Interface number.

all – Display the entire table.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Unit/slot/port: Indicates by slot id and port number which port is controlled by the fields on this line. It is possible to set the parameters for all ports by using the selectors on the top line.

Port VLAN ID: The VLAN ID that this port will assign to untagged frames or priority tagged frames received on this port. The value must be for an existing VLAN. The factory default is 1.

Acceptable Frame Types: Specifies the types of frames that may be received on this port. The options are 'VLAN only' and 'Admit All'. When set to 'VLAN only', untagged frames or priority tagged frames received on this port are discarded. When set to 'Admit All', untagged frames or priority tagged frames received on this port are accepted and assigned the value of the Port VLAN ID for this port. With either option, VLAN tagged frames are forwarded in accordance to the 802.1Q VLAN specification.

Ingress Filtering: May be enabled or disabled. When enabled, the frame is discarded if this port is not a member of the VLAN with which this frame is associated. In a tagged frame, the VLAN is identified by the VLAN ID in the tag. In an untagged frame, the VLAN is the Port VLAN ID specified for the port that received this frame. When disabled, all frames are forwarded in accordance with the 802.1Q VLAN bridge specification. The factory default is disabled.

GVRP: May be enabled or disabled.

Default Priority: The 802.1p priority assigned to untagged packets arriving on the port.

6.2.3.5 vlan database

This command is used to enter VLAN Interface configuration mode

Syntax

```
vlan database
```

Default Setting

None

Command Mode

Global Config

6.2.3.6 vlan

This command creates a new VLAN and assigns it an ID. The ID is a valid VLAN identification number (ID 1 is reserved for the default VLAN). VLAN range is 2-3965.

Syntax

```
vlan <vlanid> [<name>]
```

```
no vlan <vlanid>
```

<vlanid> - VLAN ID (Range: 2 –3965).

<name> - Configure an optional VLAN Name (a character string of 1 to 32 alphanumeric characters).

no - This command deletes an existing VLAN. The ID is a valid VLAN identification number (ID 1 is reserved for the default VLAN). VLAN range is 2-3965.

Default Setting

None

Command Mode

VLAN database

6.2.3.7 vlan name

This command changes the name of a VLAN. The name is an alphanumeric string of up to 32 characters, and the ID is a valid VLAN identification number. ID range is 1- 3965.

Syntax

```
vlan name <vlanid> <newname>
```

```
no vlan name <vlanid>
```

<vlanid> - VLAN ID (Range: 1 –3965).

<newname> - Configure a new VLAN Name (up to 16 alphanumeric characters).

no - This command sets the name of a VLAN to a blank string. The VLAN ID is a valid

VLAN identification number. ID range is 1-3965.

Default Setting

The name for VLAN ID 1 is always Default. The name for other VLANs is defaulted to a blank string.

Command Mode

VLAN database

6.2.3.8 vlan makestatic

This command changes a dynamically created VLAN (one that is created by GVRP registration) to a static VLAN (one that is permanently configured and defined). The ID is a valid VLAN identification number. VLAN range is 2-3965.

Syntax

vlan makestatic <vlanid>

<vlanid> - VLAN ID (Range: 2 –3965).

Default Setting

None

Command Mode

VLAN database

6.2.3.9 protocol group

This command attaches a <vlanid> to the protocol-based VLAN identified by <group-name>. A group may only be associated with one VLAN at a time, however the VLAN association can be changed.

Syntax

protocol group <group-name> <vlanid> no protocol group <group-name> <vlanid>

<vlanid> - VLAN ID (Range: 1 –3965).

<group-name> - a VLAN Group Name (a character string of 1 to 16 characters).

no - This command removes the <vlanid> from this protocol-based VLAN group that is identified by this <group-name>.

Default Setting

None

Command Mode

VLAN database

6.2.3.10 switchport acceptable-frame-type

This command sets the frame acceptance mode per interface. For VLAN Only mode, untagged frames or priority frames received on this interface are discarded. For Admit All mode, untagged frames or priority frames received on this interface are accepted and assigned the value of the interface VLAN ID for this port. With either option, VLAN tagged frames are forwarded in accordance with the IEEE 802.1Q VLAN Specification.

Syntax

switchport acceptable-frame-type {tagged all}
--

no switchport acceptable-frame-type {tagged all}

tagged - VLAN only mode.

all - Admit all mode.

no - This command sets the frame acceptance mode per interface to **Admit All**. For Admit All mode, untagged frames or priority frames received on this interface are accepted and assigned the value of the interface VLAN ID for this port. With either option, VLAN tagged frames are forwarded in accordance with the IEEE 802.1Q VLAN Specification.

Default Setting

Admit all

Command Mode

Interface Config

This command sets the frame acceptance mode for all interfaces. For VLAN Only mode, untagged frames or priority frames received on this interface are discarded. For Admit All mode, untagged frames or priority frames received on this interface are accepted and assigned the value of the interface VLAN ID for this port. With either option, VLAN tagged frames are forwarded in accordance with the IEEE 802.1Q VLAN Specification.

Syntax

```
switchport acceptable-frame-type all {tagged | all}  
no switchport acceptable-frame-type all {tagged | all}
```

tagged - VLAN only mode.

all – One is for Admit all mode. The other one is for all interfaces.

no - This command sets the frame acceptance mode for all interfaces to **Admit All**. For Admit All mode, untagged frames or priority frames received on this interface are accepted and assigned the value of the interface VLAN ID for this port. With either option, VLAN tagged frames are forwarded in accordance with the IEEE 802.1Q VLAN Specification.

Default Setting

Admit all

Command Mode

Global Config

6.2.3.11 switchport ingress-filtering

This command enables ingress filtering. If ingress filtering is disabled, frames received with VLAN IDs that do not match the VLAN membership of the receiving interface are admitted and forwarded to ports that are members of that VLAN.

Syntax

```
switchport ingress-filtering  
no switchport ingress-filtering
```

no - This command disables ingress filtering. If ingress filtering is disabled, frames received with VLAN IDs that do not match the VLAN membership of the receiving interface are admitted and forwarded to ports that are members of that VLAN.

Default Setting

Disabled

Command Mode

Interface Config

This command enables ingress filtering for all ports. If ingress filtering is disabled, frames received with VLAN IDs that do not match the VLAN membership of the receiving interface are admitted and forwarded to ports that are members of that VLAN.

Syntax

```
switchport ingress-filtering all  
no switchport ingress-filtering all
```

all - All interfaces.

no - This command disables ingress filtering for all ports. If ingress filtering is disabled, frames received with VLAN IDs that do not match the VLAN membership of the receiving interface are admitted and forwarded to ports that are members of that VLAN.

Default Setting

Disabled

Command Mode

Global Config

6.2.3.12 switchport native vlan

This command changes the VLAN ID per interface.

Syntax

```
switchport native vlan <vlanid>  
no switchport native vlan <vlanid>
```

<vlanid> - VLAN ID (Range: 1 –3965).

no - This command sets the VLAN ID per interface to 1.

Default Setting

1

Command Mode

Interface Config

This command changes the VLAN ID for all interfaces.

Syntax

```
switchport native vlan all <vlanid>
```

<vlanid> - VLAN ID (Range: 1 –3965).

all - All interfaces.

no - This command sets the VLAN ID for all interfaces to 1.

Default Setting

1

Command Mode

Global Config

6.2.3.13 switchport allowed vlan

This command configures the degree of participation for a specific interface in a VLAN. The ID is a valid VLAN identification number, and the interface is a valid interface number.

Syntax

```
switchport allowed vlan {add [tagged | untagged] | remove} <vlanid>
```

<vlanid> - VLAN ID (Range: 1 –3965).

add - The interface is always a member of this VLAN. This is equivalent to registration fixed.

tagged - All frames transmitted for this VLAN will be tagged.

untagged - All frames transmitted for this VLAN will be untagged.

remove - The interface is removed from the member of this VLAN. This is equivalent to registration forbidden.

Default Setting

None

Command Mode

Interface Config

This command configures the degree of participation for all interfaces in a VLAN. The ID is a valid VLAN identification number.

Syntax

```
switchport allowed vlan {add {tagged | untagged} | remove} all <vlanid>
```

<vlanid> - VLAN ID (Range: 1 –3965).

all - All interfaces.

add - The interface is always a member of this VLAN. This is equivalent to registration fixed.

tagged - all frames transmitted for this VLAN will be tagged.

untagged - all frames transmitted for this VLAN will be untagged.

remove - The interface is removed from the member of this VLAN. This is equivalent to registration forbidden.

Default Setting

None

Command Mode

Global Config

6.2.3.14 switchport tagging

This command configures the tagging behavior for a specific interface in a VLAN to enable. If tagging is enabled, traffic is transmitted as tagged frames. If tagging is disabled, traffic is transmitted as untagged frames. The ID is a valid VLAN identification number.

Syntax

```
switchport tagging <vlanid>
```

```
no switchport tagging <vlanid>
```

<vlanid> - VLAN ID (Range: 1 –3965).

no - This command configures the tagging behavior for a specific interface in a VLAN to disabled. If tagging is disabled, traffic is transmitted as untagged frames. The ID is a valid VLAN identification number.

Default Setting

Disabled

Command Mode

Interface Config

This command configures the tagging behavior for all interfaces in a VLAN to be enabled. If tagging is enabled, traffic is transmitted as tagged frames. If tagging is disabled, traffic is transmitted as untagged frames. The ID is a valid VLAN identification number.

Syntax**switchport tagging all <vlanid>****<vlanid>** - VLAN ID (Range: 1 –3965).**all** - All interfaces**no** - This command configures the tagging behavior for all interfaces in a VLAN to disabled. If tagging is disabled, traffic is transmitted as untagged frames. The ID is a valid VLAN identification number.**Default Setting**

Disabled

Command Mode

Global Config

6.2.3.15 switchport priority

This command configures the default 802.1p port priority assigned for untagged packets for a specific interface.

Syntax**switchport priority <0-7>****<0-7>** - The range for the priority is 0 - 7.

Default Setting

0

Command Mode

Interface Config

This command configures the port priority assigned for untagged packets for all ports presently plugged into the device. Any subsequent per port configuration will override this configuration setting.

Syntax

```
switchport priority all <0-7>
```

<0-7> - The range for the priority is 0-7.

all – All interfaces

Default Setting

0

Command Mode

Global Config

6.2.3.16 switchport protocol group

This command adds the physical *<unit/slot/port>* interface to the protocol-based VLAN identified by *<group-name>*. A group may have more than one interface associated with it. Each interface and protocol combination can only be associated with one group. If adding an interface to a group causes any conflicts with protocols currently associated with the group, this command will fail, and the interface(s) will not be added to the group.

Syntax

```
switchport protocol group <group-name>  
no switchport protocol group <group-name>
```

<group-name> - a VLAN Group Name (a character string of 1 to 16 characters).

no - This command removes the *interface* from this protocol-based VLAN group that is identified by this *<group-name>*.

Default Setting

None

Command Mode

Interface Config

This command adds a protocol-based VLAN group to the system. The *<group-name>* is a character string of 1 to 16 characters. When it is created, the protocol group will be assigned a unique number that will be used to identify the group in subsequent commands.

Syntax

```
switchport protocol group <group-name>  
no switchport protocol group <group-name>
```

<group-name> - a VLAN Group Name (a character string of 1 to 16 characters).

no - This command removes the protocol-based VLAN group that is identified by this *<group-name>*.

Default Setting

None

Command Mode

Global Config

This command adds all physical interfaces to the protocol-based VLAN identified by *<group-name>*. A group may have more than one interface associated with it. Each interface and protocol combination can only be associated with one group. If adding an interface to a group causes any conflicts with protocols currently associated with the group, this command will fail, and the interface(s) will not be added to the group.

Syntax

```
switchport protocol group all <group-name>  
no switchport protocol group all <group-name>
```

<group-name> - a VLAN Group Name (a character string of 1 to 16 characters).

all - All interfaces.

no - This command removes all interfaces from this protocol-based VLAN group that is identified by this <group-name>.

Default Setting

None

Command Mode

Global Config

This command adds the <protocol> to the protocol-based VLAN identified by <group-name>. A group may have more than one protocol associated with it. Each interface and protocol combination can only be associated with one group. If adding a protocol to a group causes any conflicts with interfaces currently associated with the group, this command will fail, and the protocol will not be added to the group. The possible values for protocol are *ip*, *arp*, and *ipx*.

Syntax

```
switchport protocol group add protocol <group-name> {ip | arp | ipx}  
no switchport protocol group add protocol <group-name> {ip | arp | ipx}
```

<group-name> - a VLAN Group Name (a character string of 1 to 16 characters).

ip - IP protocol.

arp - ARP protocol.

ipx - IPX protocol.

no - This command removes the <protocol> from this protocol-based VLAN group that is identified by this <group-name>. The possible values for protocol are *ip*, *arp*, and *ipx*.

Default Setting

None

Command Mode

Global Config

6.2.3.17 switchport forbidden vlan

This command used to configure forbidden VLANs.

Syntax

```
switchport forbidden vlan {add | remove} <vlanid>  
no switchport forbidden
```

<vlanid> - VLAN ID (Range: 1 –3965).

add - VLAN ID to add.

remove - VLAN ID to remove.

no - Remove the list of forbidden VLANs.

Default Setting

None

Command Mode

Interface Config

6.2.4 GVRP and Bridge Extension**6.2.4.1 show bridge-ext**

This command displays Generic Attributes Registration Protocol (GARP) information.

Syntax

```
show bridge-ext
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

GMRP Admin Mode: This displays the administrative mode of GARP Multicast Registration Protocol (GMRP) for the system.

GVRP Admin Mode: This displays the administrative mode of GARP VLAN Registration Protocol (GVRP) for the system.

6.2.4.2 show gvrp configuration

This command displays Generic Attributes Registration Protocol (GARP) information for one or all interfaces.

Syntax

```
show gvrp configuration {<unit/slot/port> | all}
```

<unit/slot/port> - An interface number.

all - All interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: This displays the unit/slot/port of the interface that this row in the table describes.

Join Timer: Specifies the interval between the transmission of GARP PDUs registering (or re-registering) membership for an attribute. Current attributes are a VLAN or multicast group. There is an instance of this timer on a per-Port, per-GARP participant basis. Permissible values are 10 to 100 centiseconds (0.1 to 1.0 seconds). The factory default is 20 centiseconds (0.2 seconds). The finest granularity of specification is 1 centisecond (0.01 seconds).

Leave Timer: Specifies the period of time to wait after receiving an unregister request for an attribute before deleting the attribute. Current attributes are a VLAN or multicast group. This may be considered a buffer time for another station to assert registration for the same attribute in order to maintain uninterrupted service. There is an instance of this timer on a per-Port, per-GARP participant basis. Permissible values are 20 to 600 centiseconds (0.2 to 6.0 seconds). The factory default is 60 centiseconds (0.6 seconds). The finest granularity of specification is 1 centisecond (0.01 seconds).

LeaveAll Timer: This Leave All Time controls how frequently LeaveAll PDUs are generated. A LeaveAll PDU indicates that all registrations will shortly be deregistered. Participants will need to rejoin in order to maintain registration. There is an instance of this timer on a

per-Port, per-GARP participant basis. The Leave All Period Timer is set to a random value in the range of LeaveAll- Time to 1.5*LeaveAllTime. Permissible values are 200 to 6000 centiseconds (2 to 60 seconds). The factory default is 1000 centiseconds (10 seconds). The finest granularity of specification is 1 centisecond (0.01 seconds).

Port GVRP Mode: Indicates the GVRP administrative mode for the port. It may be enabled or disabled. If this parameter is disabled, Join Time, Leave Time, and Leave All Time have no effect. The factory default is disabled.

6.2.4.3 show gmrp configuration

This command displays Generic Attributes Registration Protocol (GARP) information for one or All interfaces.

Syntax

show gmrp configuration {<unit/slot/port> all}

<unit/slot/port> - An interface number.

all - All interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: This displays the unit/slot/port of the interface that this row in the table describes.

Join Timer: Specifies the interval between the transmission of GARP PDUs registering (or re-registering) membership for an attribute. Current attributes are a VLAN or multicast group. There is an instance of this timer on a per-Port, per-GARP participant basis. Permissible values are 10 to 100 centiseconds (0.1 to 1.0 seconds). The factory default is 20 centiseconds (0.2 seconds). The finest granularity of specification is 1 centisecond (0.01 seconds).

Leave Timer: Specifies the period of time to wait after receiving an unregister request for an attribute before deleting the attribute. Current attributes are a VLAN or multicast group. This may be considered a buffer time for another station to assert registration for the same attribute in order to maintain uninterrupted service. There is an instance of this timer on a per-Port, per-GARP participant basis. Permissible values are 20 to 600 centiseconds (0.2 to 6.0 seconds). The factory default is 60 centiseconds (0.6 seconds). The finest granularity of specification is 1 centisecond (0.01 seconds).

LeaveAll Timer: This Leave All Time controls how frequently LeaveAll PDUs are generated. A LeaveAll PDU indicates that all registrations will shortly be deregistered. Participants will need to rejoin in order to maintain registration. There is an instance of this timer on a per-Port, per-GARP participant basis. The Leave All Period Timer is set to a random value in

the range of LeaveAll- Time to 1.5*LeaveAllTime. Permissible values are 200 to 6000 centiseconds (2 to 60 seconds). The factory default is 1000 centiseconds (10 seconds). The finest granularity of specification is 1 centisecond (0.01 seconds).

Port GMRP Mode: Indicates the GMRP administrative mode for the port. It may be enabled or disabled. If this parameter is disabled, Join Time, Leave Time, and Leave All Time have no effect. The factory default is disabled.

6.2.4.4 show garp configuration

This command displays GMRP and GVRP configuration information for one or all interfaces.

Syntax

show garp configuration {<unit/slot/port> all}

<unit/slot/port> - An interface number.

all - All interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: This displays the unit/slot/port of the interface that this row in the table describes.

GVRP Mode: Indicates the GVRP administrative mode for the port. It may be enabled or disabled. If this parameter is disabled, Join Time, Leave Time, and Leave All Time have no effect. The factory default is disabled.

GMRP Mode: Indicates the GMRP administrative mode for the port. It may be enabled or disabled. If this parameter is disabled, Join Time, Leave Time, and Leave All Time have no effect. The factory default is disabled.

6.2.4.5 bridge-ext gvrp

This command enables GVRP.

Syntax

bridge-ext gvrp no bridge-ext gvrp

no - This command disables GVRP.

Default Setting

Disabled

Command Mode

Global Config

6.2.4.6 bridge-ext gmrp

This command enables GARP Multicast Registration Protocol (GMRP) on the system. The default value is disabled.

Syntax

bridge-ext gmrp no bridge-ext gmrp

no - This command disables GARP Multicast Registration Protocol (GMRP) on the system.

Default Setting

Disabled

Command Mode

Global Config

6.2.4.7 switchport gvrp

This command enables GVRP (GARP VLAN Registration Protocol) for a specific port.

Syntax

switchport gvrp no switchport gvrp

no - This command disables GVRP (GARP VLAN Registration Protocol) for a specific port. If GVRP is disabled, Join Time, Leave Time, and Leave All Time have no effect.

Default Setting

Disabled

Command Mode

Interface Config

This command enables GVRP (GARP VLAN Registration Protocol) for all ports.

Syntax

switchport gvrp all no switchport gvrp all

all - All interfaces.

no - This command disables GVRP (GARP VLAN Registration Protocol) for all ports. If GVRP is disabled, Join Time, Leave Time, and Leave All Time have no effect.

Default Setting

Disabled

Command Mode

Global Config

6.2.4.8 switchport gmrp

This command enables GMRP Multicast Registration Protocol on a selected interface. If an interface which has GMRP enabled is enabled for routing or is enlisted as a member of a port-channel (LAG), GMRP functionality will be disabled on that interface. GMRP functionality will subsequently be re-enabled if routing is disabled or port-channel (LAG) membership is removed from an interface that has GMRP enabled.

Syntax**switchport gmrip****no switchport gmrip**

no - This command disables GMRP Multicast Registration Protocol on a selected interface. If an interface which has GMRP enabled is enabled for routing or is enlisted as a member of a port-channel (LAG), GMRP functionality will be disabled on that interface. GMRP functionality will subsequently be re-enabled if routing is **disabled or port-channel (LAG)** membership is removed from an interface that has GMRP enabled.

Default Setting

Disabled

Command Mode

Interface Config

This command enables GMRP Multicast Registration Protocol on all interfaces. If an interface which has GMRP enabled is enabled for routing or is enlisted as a member of a port-channel (LAG), GMRP functionality will be disabled on that interface. GMRP functionality will subsequently be re-enabled if routing is disabled and port-channel (LAG) membership is removed from an interface that has GMRP enabled.

Syntax**switchport gmrip all****no switchport gmrip all**

all - All interfaces.

no - This command disables GMRP Multicast Registration Protocol on a selected interface.

Default Setting

Disabled

Command Mode

Global Config

6.2.4.9 garp timer

This command sets the GVRP join time per port and per GARP. Join time is the interval between the transmission of GARP Protocol Data Units (PDUs) registering (or re-registering) membership for a VLAN or multicast group.

This command has an effect only when GVRP and GMRP are enabled. The time is from 10 to 100 (centiseconds).

Syntax

garp timer join <10-100>

no garp timer join

<10-100> - join time (Range: 10 – 100) in centiseconds.

no - This command sets the GVRP join time per port and per GARP to 20 centiseconds (0.2 seconds). This command has an effect only when GVRP and GMRP are enabled.

Default Setting

20 centiseconds (0.2 seconds)

Command Mode

Interface Config

This command sets the GVRP join time for all ports and per GARP. Join time is the interval between the transmission of GARP Protocol Data Units (PDUs) registering (or re-registering) membership for a VLAN or multicast group.

This command has an effect only when GVRP and GMRP are enabled. The time is from 10 to 100 (centiseconds).

Syntax

garp timer join all < 10-100 >

no garp timer join all

<10-100> - join time (Range: 10 – 100) in centiseconds.

all - All interfaces.

no - This command sets the GVRP join time for all ports and per GARP to 20 centiseconds (0.2 seconds). This command has an effect only when GVRP and GMRP are enabled.

Default Setting

20 centiseconds (0.2 seconds)

Command Mode

Global Config

This command sets the GVRP leave time per port. Leave time is the time to wait after receiving an unregister request for a VLAN or a multicast group before deleting the VLAN entry. This can be considered a buffer time for another station to assert registration for the same attribute in order to maintain uninterrupted service. The time is from 20 to 600 (centiseconds).

Note: This command has an effect only when GVRP and GMRP are enabled.

Syntax
garp timer leave < 20-600 > no garp timer leave

<20-600> - leave time (Range: 20 – 600) in centiseconds.

no - This command sets the GVRP leave time per port to 60 centiseconds (0.6 seconds).

Note: This command has an effect only when GVRP and GMRP are enabled.

Default Setting

60 centiseconds (0.6 seconds)

Command Mode

Interface Config

This command sets the GVRP leave time for all ports. Leave time is the time to wait after receiving an unregister request for a VLAN or a multicast group before deleting the VLAN entry. This can be considered a buffer time for another station to assert registration for the same

attribute in order to maintain uninterrupted service. The time is from 20 to 600 (centiseconds).

Note: This command has an effect only when GVRP and GMRP are enabled.

Syntax

```
garp timer leave all < 20-600 >
```

```
no garp timer leave all
```

<20-600> - leave time (Range: 20 – 600) in centiseconds.

all - All interfaces.

no - This command sets the GVRP leave time for all ports to the default 60 centiseconds (0.6 seconds).

Note: This command has an effect only when GVRP and GMRP are enabled.

Default Setting

60 centiseconds (0.6 seconds)

Command Mode

Global Config

This command sets how frequently Leave All PDUs are generated per port. A Leave All PDU indicates that all registrations will be unregistered. Participants would need to rejoin in order to maintain registration. The value applies per port and per GARP participation. The time may range from 200 to 6000 (centiseconds).

Note: This command has an effect only when GVRP and GMRP are enabled.

Syntax

```
garp timer leaveall < 200-6000 >
```

```
no garp timer leaveall
```

<200-6000> - leave time (Range: 200 – 6000) in centiseconds.

no - This command sets how frequently Leave All PDUs are generated per port to 1000 centiseconds (10 seconds).

Note: This command has an effect only when GVRP and GMRP are enabled.

Default Setting

1000 centiseconds (10 seconds)

Command Mode

Interface Config

This command sets how frequently Leave All PDUs are generated for all ports. A Leave All PDU indicates that all registrations will be unregistered. Participants would need to rejoin in order to maintain registration. The value applies per port and per GARP participation. The time may range from 200 to 6000 (centiseconds).

Note: This command has an effect only when GVRP and GMRP are enabled.

Syntax

```
garp timer leaveall all < 200-6000 >
```

```
no garp timer leaveall all
```

<200-6000> - leave time (Range: 200 – 6000) in centiseconds.

all - All interfaces.

no - This command sets how frequently Leave All PDUs are generated for all ports to 1000 centiseconds (10 seconds).

Note: This command has an effect only when GVRP and GMRP are enabled.

Default Setting

1000 centiseconds (10 seconds)

Command Mode

Global Config

6.2.5 IGMP Snooping**6.2.5.1 Show Commands**

6.2.5.1.1. show ip igmp snooping

This command displays IGMP Snooping information. Configured information is displayed whether or not IGMP Snooping is enabled. Status information is only displayed when IGMP Snooping is enabled.

Syntax

show ip igmp snooping

Default Setting

None

Command Mode

Privileged Exec

Display Message

Admin Mode: This indicates whether or not IGMP Snooping is active on the switch.

Multicast Control Frame Count: This displays the number of multicast control frames that are processed by the CPU.

Interfaces Enabled for IGMP Snooping: This is the list of interfaces on which IGMP Snooping is enabled.

Vlan Enabled for IGMP Snooping: This is the list of interfaces on which IGMP Snooping is enabled.

6.2.5.1.2. show ip igmp snooping mrouter

This command displays information on statically configured and dynamically learned multicast router ports or multicast router configuration.

Syntax

show ip igmp snooping mrouter [{ vlan <vlanid> interface [unit/slot/port] }]

<vlanid> - VLAN ID (Range: 1 – 3965).

unit/slot/port - The interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message

VLAN ID: This displays VLAN ID value.

Unit/Slot/Port: The interface number.

Multicast Router Attached: This displays if the interface is enabled as a multicast router port.

6.2.5.1.3. show ip igmp snooping multicast

This command displays the known multicast address.

Syntax

show ip igmp snooping multicast [vlan <vlanid>] [static dynamic]

<vlanid> - VLAN ID (Range: 1 – 3965).

static - Displays only the configured multicast entries.

dynamic - Displays only entries learned through IGMP snooping.

Default Setting

None

Command Mode

Privileged Exec

Display Message

VLAN: This displays VLAN ID value.

MAC Addr: This displays multicast group MAC addresses.

Type: This displays the type of multicast group (Dynamic/Static).

Member Port: This displays the number of ports of this vlan and multicast group.

6.2.5.1.4. show ip igmp snooping

This command displays IGMP Snooping information. Configured information is displayed whether or not IGMP Snooping is enabled.

Syntax

```
show ip igmp snooping <1-3965>
```

<1-3965> - VLAN ID (Range: 1 – 3965).

Default Setting

None

Command Mode

Privileged Exec

Display Message

Vlan ID This is the list of VLANS on which IGMP Snooping is enabled.

IGMP Snooping Admin Mode This indicates whether or not IGMP Snooping is active on the VLAN.

Fast Leave Mode This indicates whether or not IGMP Snooping Fast-leave is active on the VLAN.

Group Membership Interval Time The Group Membership Interval time is the amount of time in seconds that a switch will wait for a report from a particular group on a particular interface, which is participating in the VLAN, before deleting the interface from the entry. This value may be configured

Max Response Time This displays the amount of time the switch will wait after sending a query on an interface, participating in the VLAN, because it did not receive a report for a particular group on that interface. This value may be configured.

Multicast Router Expiration Time If a query is not received on an interface, participating in the VLAN, within this amount of time, the interface is removed from the list of interfaces with multicast routers attached. This value may be configured.

6.2.5.2 Configuration Commands**6.2.5.2.1. ip igmp snooping**

This command enables IGMP Snooping on the system. The default value is disabled.

Syntax

```
ip igmp snooping  
no igmp snooping
```

no - This command disables IGMP Snooping on the system.

Default Setting

Disabled

Command Mode

Global Config

6.2.5.2.2. ip igmp snooping groupmembershipinterval

This command sets the IGMP Group Membership Interval time on the system. The Group Membership Interval time is the amount of time in seconds that a switch will wait for a report from a particular group on a particular interface before deleting the interface from the entry. This value must be greater than the IGMP Maximum Response time value. The range is 1 to 3600 seconds.

Syntax**ip igmp snooping groupmembershipinterval <2-3600>****no ip igmp snooping groupmembershipinterval**

<2-3600> - interval time (Range: 2 – 3600) in seconds.

no - This command sets the IGMP Group Membership Interval time on the system to 260 seconds.

Default Setting

260 seconds

Command Mode

Global Config, Interface Config

6.2.5.2.3. ip igmp snooping interfacemode

This command enables IGMP Snooping on a selected interface. If an interface which has IGMP Snooping enabled is enabled for routing or is enlisted as a member of a port-channel (LAG), IGMP Snooping functionality will be disabled on that interface. IGMP Snooping functionality will subsequently be re-enabled if routing is disabled or port-channel (LAG) membership is removed from an interface that has IGMP Snooping enabled.

Syntax**ip igmp snooping interfacemode****no ip igmp snooping interfacemode**

no - This command disables IGMP Snooping on a selected interface.

Default Setting

Disabled

Command Mode

Interface Config

This command enables IGMP Snooping on all interfaces. If an interface which has IGMP Snooping enabled is enabled for routing or is enlisted as a member of a port-channel (LAG), IGMP Snooping functionality will be disabled on that interface. IGMP Snooping functionality will subsequently be re-enabled if routing is disabled or port-channel (LAG) membership is removed from an interface that has IGMP Snooping enabled.

Syntax

```
ip igmp snooping interfacemode all
```

all - All interfaces.

no - This command disables IGMP Snooping on all interfaces.

Default Setting

Disabled

Command Mode

Global Config

6.2.5.2.4. ip igmp snooping mcrtrexpiretime

This command sets the Multicast Router Present Expiration time on the system. This is the amount of time in seconds that a switch will wait for a query to be received on an interface before the interface is removed from the list of interfaces with multicast routers attached. The range is 0 to 3600 seconds. A value of 0 indicates an infinite timeout, that is, no expiration.

Syntax

```
ip igmp snooping mcrtrexpiretime <0-3600>
```

no ip igmp snooping mcartexpiretime

<0-3600> - Expiration time (Range: 0 – 3600).

no - This command sets the Multicast Router Present Expiration time on the system to 0. A value of 0 indicates an infinite timeout, that is no expiration.

Default Setting

0

Command Mode

Global Config, Interface Config

6.2.5.2.5. ip igmp snooping max-response-time

This command sets the IGMP Maximum Response time on the system. The Maximum Response time is the amount of time in seconds that a switch will wait after sending a query on an interface because it did not receive a report for a particular group in that interface. This value must be less than the IGMP Query Interval time value. The range is 1 to 3600 seconds.

Syntax

ip igmp snooping max-response-time <sec>
no ip igmp snooping max-response-time

<sec> - Max time (Range: 1 – 3599).

no - This command sets the IGMP Maximum Response time on the system to 10 seconds.

Default Setting

10 seconds

Command Mode

Global Config, Interface Config.

6.2.5.2.6. ip igmp snooping immediate-leave

This command enables or disables IGMP Snooping fast-leave admin mode on a selected interface or on all interfaces. Enabling fastleave allows the switch to immediately remove the layer 2 LAN interface from its forwarding table entry upon receiving an IGMP leave message for that multicast group without first sending out MAC-based general queries to the interface(s). Fast-leave admin mode should be enabled only on VLANs where only one host is connected to each layer 2 LAN port, to prevent the inadvertent dropping of the other hosts that were connected to the same layer 2 LAN port but were still interested in receiving multicast traffic

directed to that group. Also, fast-leave processing is supported only with IGMP version 2 hosts.

Syntax

```
ip igmp snooping immediate-leave
no ip igmp snooping immediate-leave
```

no - This command disables IGMP Snooping fast-leave admin mode.

Default Setting

Disabled

Command Mode

Global Config, Interface Config.

6.2.5.2.7. ip igmp snooping mrouter

This command configures a selected interface as a multicast router interface. When configured as a multicast router interface, the interface is treated as a multicast router interface in all VLANs.

Syntax

```
ip igmp snooping mrouter interface
no ip igmp snooping mrouter interface
```

no - This command disables the status of the interface as a statically configured multicast router interface.

Default Setting

Disabled

Command Mode

Interface Config.

This command configures the VLAN ID(<vlanId>) that has the multicast router mode enabled.

Syntax

```
ip igmp snooping mrouter <vlanId>  
no set igmp snooping mrouter <vlanId>
```

<vlanId> - VLAN ID.

no - This command disables the status of the interface as a statically configured multicast router interface.

Default Setting

Disabled

Command Mode

Interface Config.

6.2.5.2.8. ip igmp snooping vlan static

This command is used to add a port to a multicast group.

Syntax

```
ip igmp snooping vlan <vlanid> static <macaddr> interface <unit/slot/port>
```

<vlanid> - VLAN ID (Range: 1 – 3965).

<macaddr> - Multicast group MAC address.

<unit/slot/port> - Interface number.

Default Setting

None

Command Mode

Global Config

Command Usage

The maximum number of static router ports that can be configured is 64.

6.2.5.2.9. set igmp

This command enables IGMP snooping on a particular VLAN, and in turn enabling IGMP snooping on all interfaces participating in this VLAN.

Syntax
set igmp <1-3965> no set igmp <1-3965>

<1-3965> - VLAN ID (Range: 1 – 3965).

no - This command disables IGMP snooping on a particular VLAN, and in turn disabling IGMP snooping on all interfaces participating in this VLAN.

Default Setting

None

Command Mode

Vlan Database

6.2.5.2.10. set igmp groupmembership-interval

This command sets the IGMP Group Membership Interval on a particular VLAN. The Group Membership Interval time is the amount of time in seconds that a switch will wait for a report from a particular group on a particular interface, which is participating in the VLAN, before deleting the interface from the entry. This value must be greater than IGMP Maximum Response time value. The range is 2 to 3600 seconds.

Syntax
set igmp groupmembership-interval <1-3965> <2-3600>

no set igmp groupmembershipinterval <1-3965>

<1-3965> - VLAN ID (Range: 1 – 3965).

<2-3600> - The range of group membership interval time is 2 to 3600 seconds.

no - This command sets the IGMP Group Membership Interval time on a particular VLAN to the default value.

Default Setting

260

Command Mode

Vlan Database

6.2.5.2.11. set igmp maxresponse

This command sets the IGMP Maximum Response time on a particular VLAN. The Maximum Response time is the amount of time in seconds that a switch will wait after sending a query on an interface, which is participating in the VLAN, because it did not receive a report for a particular group in that interface. This value must be less than the IGMP Query Interval time value.

Syntax
set igmp maxresponse <1-3965> <1-3599> no set igmp maxresponse <1-3965>

<1-3965> - VLAN ID (Range: 1 – 3965).

no - This command sets the IGMP maximum response time on a particular VLAN to the default value.

Default Setting

10

Command Mode

Vlan Database

6.2.5.2.12. set igmp mcrtexpiretime

This command sets the Multicast Router Present Expiration time on a particular VLAN. This is the amount of time in seconds that a switch will wait for a query to be received on an interface, which is participating in the VLAN, before the interface is removed from the list of interfaces with multicast routers attached. The range is 0 to 3600 seconds. A value of 0 indicates an infinite time-out, i.e. no expiration.

Syntax

```
set igmp mcrtexpiretime <1-3965> <0-3600>  
no set igmp mcrtexpiretime <1-3965>
```

<1-3965> - VLAN ID (Range: 1 – 3965).

<0-3600> - The range of the Multicat Router Present Expire time is 0 to 3600 seconds.

no - This command sets the IGMP Multicast Router Present Expire time on a particular VLAN to the default value.

Default Setting

10

Command Mode

Vlan Database

6.2.5.2.13. set igmp fast-leave

This command enables or disables IGMP Snooping fast-leave admin mode on a selected VLAN. Enabling fastleave allows the switch to immediately remove the layer 2 LAN interface, participating in the VLAN, from its forwarding table entry upon receiving an IGMP leave message for that multicast group without first sending out MAC-based general queries to the interface. Fast-leave admin mode should be enabled only on VLANs where only one host is connected to each layer 2 LAN port, to prevent the inadvertent dropping of the other hosts that were connected to the same layer 2 LAN port but were still interested in receiving multicast traffic directed to that group. Also, fast-leave processing is supported only with IGMP version 2 hosts.

Syntax

<pre>set igmp fast-leave <1-3965> no set igmp fast-leave <1-3965></pre>

<1-3965> - VLAN ID (Range: 1 – 3965).

no - This command disables IGMP Snooping fast-leave admin mode on a selected VLAN.

Default Setting

None

Command Mode

Vlan Database

6.2.6 Port Channel

6.2.6.1 show port-channel

This command displays the static capability of all port-channels (LAGs) on the device as well as a summary of individual port-channels.

Syntax

<pre>show port-channel</pre>

Default Setting

None

Command Mode

Privileged Exec

Display Message

Static Capability: This field displays whether or not the device has static capability enabled.

For each port-channel the following information is displayed:

Logical Interface: The field displays logical slot and the logical port.

Port-Channel Name: This field displays the name of the port-channel.

Link State: This field indicates whether the link is up or down.

Mbr Ports: This field lists the ports that are members of this port-channel, in unit/slot/port notation.

Active Ports: This field lists the ports that are actively participating in this port-channel.

This command displays an overview of all port-channels (LAGs) on the switch.

Syntax

```
show port-channel {<logical unit/slot/port> | all}
```

<logical unit/slot/port> - Port-Channel Interface number.

all – all Port-Channel interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Log. Intf: The logical slot and the logical port.

Port-Channel Name: The name of this port-channel (LAG). You may enter any string of up to 15 alphanumeric characters.

Link : Indicates whether the Link is up or down.

Admin Mode: May be enabled or disabled. The factory default is enabled.

Link Trap Mode: This object determines whether or not to send a trap when link status changes. The factory default is enabled.

STP Mode: The Spanning Tree Protocol Administrative Mode associated with the port or port channel (LAG). The possible values are:

Disable: Spanning tree is disabled for this port.

Enable: Spanning tree is enabled for this port. (Default Value)

Mbr Ports: A listing of the ports that are members of this port-channel (LAG), in unit/slot/port notation. There can be a maximum of eight ports assigned to a given port-channel (LAG).

Port Speed: Speed of the port-channel port.

Type: This field displays the status designating whether a particular port-channel (LAG) is statically or dynamically maintained. The possible values of this field are Static, indicating that the port-channel is statically maintained; and Dynamic, indicating that the port-channel is dynamically maintained.

Port Active: This field lists the ports that are actively participating in the port-channel (LAG).

6.2.6.2 port-channel

This command configures a new port-channel (LAG) and generates a logical slot and port number for it. Display this number using the **show port-channel**.

Note: Before including a port in a port-channel, set the port physical mode. See **speed** command.

Syntax

```
port-channel <name>  
no port-channel {<logical unit/slot/port> | all}
```

<logical unit/slot/port> - Port-Channel Interface number.

<name> - Port-Channel name (up to 15 alphanumeric characters).

all - all Port-Channel interfaces.

no - This command removes that Port-Channel.

Default Setting

None

Command Mode

Global Config

Command Usage

1. Max number of port-channels could be created by user are 6 and Max. Number of members for each port-channel are 8.

6.2.6.3 port-channel adminmode all

This command sets every configured port-channel with the same administrative mode setting.

Syntax

```
port-channel adminmode all  
no port-channel adminmode all
```

no - This command disables a port-channel (LAG). The option **all** sets every configured port-channel with the same administrative mode setting.

Default Setting

Enabled

Command Mode

Global Config

6.2.6.4 port-channel staticcapability

This command enables the support of port-channels (static link aggregations - LAGs) on the device. By default, the static capability for all port-channels is disabled.

Syntax**port-channel staticcapability****no port-channel staticcapability**

no - This command disables the support of static port-channels on this device.

Default Setting

Disabled

Command Mode

Global Config

6.2.6.5 port-channel linktrap

This command enables link trap notifications for the port-channel (LAG). The interface is a logical slot and port for a configured port-channel. The option **all** sets every configured port-channel with the same administrative mode setting.

Syntax**port-channel linktrap {<logical unit/slot/port> | all}****no port-channel linktrap {<logical unit/slot/port> | all}**

<logical unit/slot/port> - Port-Channel Interface number.

all - all Port-Channel interfaces.

no - This command disables link trap notifications for the port-channel (LAG). The interface is a logical slot and port for a configured port-channel. The option **all** sets every configured port-channel with the same administrative mode setting.

Default Setting

Enabled

Command Mode

Global Config

6.2.6.6 port-channel name

This command defines a name for the port-channel (LAG). The interface is a logical slot and port for a configured port-channel, and name is an alphanumeric string up to 15 characters. This command is used to modify the name that was associated with the port-channel when it was created.

Syntax
port-channel name {<logical unit/slot/port> all} <name>

<logical unit/slot/port> - Port-Channel Interface number.

all - all Port-Channel interfaces.

<name> - Configured Port-Channel name (up to 15 characters).

Default Setting

None

Command Mode

Global Config

6.2.6.7 adminmode

This command enables a port-channel (LAG) members. The interface is a logical slot and port for a configured port-channel.

Syntax

```
adminmode  
no adminmode
```

no - This command disables a configured port-channel (LAG).

Default Setting

Enabled

Command Mode

Interface Config

6.2.6.8 lacp

This command enables Link Aggregation Control Protocol (LACP) on a port.

Syntax

```
lacp  
no lacp
```

no - This command disables Link Aggregation Control Protocol (LACP) on a port.

Default Setting

Enabled

Command Mode

Interface Config

This command enables Link Aggregation Control Protocol (LACP) on all ports.

Syntax

lacp all no lacp all

all - All interfaces.

no - This command disables Link Aggregation Control Protocol (LACP) on all ports.

Default Setting

Enabled

Command Mode

Global Config

6.2.6.9 channel-group

This command adds one port to the port-channel (LAG). The first interface is a logical slot and port number of a configured port-channel.

Note: Before adding a port to a port-channel, set the physical mode of the port. See 'speed' command.

Syntax
channel-group <logical unit/slot/port>

<logical unit/slot/port> - Port-Channel Interface number.

Default Setting

None

Command Mode

Interface Config

Command Usage

1. The maximum number of members for each Port-Channel is 6.

6.2.6.10 delete-channel-group

This command deletes the port from the port-channel (LAG). The interface is a logical slot and port number of a configured port-channel.

Syntax

```
delete-channel-group <logical unit/slot/port>
```

<logical unit/slot/port> - Port-Channel Interface number.

Default Setting

None

Command Mode

Interface Config

This command deletes all configured ports from the port-channel (LAG). The interface is a logical slot and port number of a configured port-channel.

Syntax

```
delete-channel-group <logical unit/slot/port> all
```

<logical unit/slot/port> - Port-Channel Interface number.

all - All members for specific Port-Channel.

Default Setting

None

Command Mode

Global Config

6.2.7 Storm Control

6.2.7.1 show storm-control

This command is used to display broadcast storm control information.

Syntax**show storm-control broadcast****Default Setting**

None

Command Mode

Privileged Exec

Display Message**Intf:** Displays interface number.**Mode:** Displays status of storm control broadcast.**Level:** Displays level for storm control broadcast.**Rate:** Displays rate for storm control broadcast.

This command is used to display multicast storm control information.

Syntax**show storm-control multicast****Default Setting**

None

Command Mode

Privileged Exec

Display Message**Intf:** Displays interface number.**Mode:** Displays status of storm control multicast.**Level:** Displays level for storm control multicast**Rate:** Displays rate for storm control multicast.

This command is used to display unicast storm control information

Syntax

show storm-control unicast

Default Setting

None

Command Mode

Privileged Exec

Display Message

Intf: Displays interface number.

Mode: Displays status of storm control unicast.

Level: Displays level for storm control unicast

Rate: Displays rate for storm control unicast.

6.2.7.2 storm-control broadcast

This command enables broadcast storm recovery mode on the selected interface. If the mode is enabled, broadcast storm recovery with high threshold is implemented. The threshold implementation follows a percentage pattern. If the broadcast traffic on any Ethernet port exceeds the high threshold percentage (as represented in “Broadcast Storm Recovery Thresholds” table) of the link speed, the switch discards the broadcasts traffic until the broadcast traffic returns to the threshold percentage or less. The full implementation is depicted in the “Broadcast Storm Recovery Thresholds” table.

Syntax

storm-control broadcast

no storm-control broadcast

no - This command disables broadcast storm recovery mode on the selected interface. The threshold implementation follows a percentage pattern. If the broadcast traffic on any Ethernet port exceeds the high threshold percentage (as represented in “Broadcast Storm Recovery Thresholds” table) of the link speed, the switch discards the broadcasts traffic until the broadcast traffic returns to the threshold percentage or less. The full implementation is depicted in the “Broadcast Storm Recovery Thresholds” table.

Default Setting

Disabled

Command Mode

Interface Config

This command enables broadcast storm recovery mode on all interfaces.

Syntax**storm-control broadcast**
no storm-control broadcast

no - This command disables broadcast storm recovery mode on all interfaces.

Default Setting

Disabled

Command Mode

Global Config

6.2.7.3 storm-control multicast

This command enables multicast storm recovery mode on the selected interface.

Syntax**storm-control multicast**
no storm-control multicast

no - This command disables multicast storm recovery mode on the selected interface.

Default Setting

None

Command Mode

Interface Config

This command enables multicast storm recovery mode on all interfaces.

Syntax

storm-control multicast no storm-control multicast

no - This command disables multicast storm recovery mode on all interfaces.

Default Setting

None

Command Mode

Global Config

6.2.7.4 storm-control unicast

This command enables unicast storm recovery mode on the selected interface.

Syntax

storm-control unicast no storm-control unicast

no - This command disables unicast storm recovery mode on the selected interface.

Default Setting

None

Command Mode

Interface Config

This command enables unicast storm recovery mode on all interfaces.

Syntax

```
storm-control unicast  
no storm-control unicast
```

no - This command disables unicast storm recovery mode on all interfaces.

Default Setting

None

Command Mode

Global Config

6.2.7.5 switchport broadcast packet-rate

This command will protect your network from broadcast storms by setting a threshold level for broadcast traffic on each port.

Syntax

```
switchport broadcast packet-rate {1 | 2 | 3 | 4}
```

- 1** - Threshold level represents 64 pps (packet per second).
- 2** - Threshold level represents 128 pps (packet per second).
- 3** - Threshold level represents 256 pps (packet per second).
- 4** - Threshold level represents 512 pps (packet per second).

Default Setting

Level 4

Command Mode

Interface Config

This command will protect your network from broadcast storms by setting a threshold level for broadcast traffic on all ports.

Syntax**switchport broadcast all packet-rate {1 | 2 | 3 | 4}**

- 1** - Threshold level represents 64 pps (packet per second).
- 2** - Threshold level represents 128 pps (packet per second).
- 3** - Threshold level represents 256 pps (packet per second).
- 4** - Threshold level represents 512 pps (packet per second).
- all** - This command represents all interfaces.

Default Setting

Level 4

Command Mode

Global Config

6.2.7.6 switchport multicast packet-rate

This command will protect your network from multicast storms by setting a threshold level for multicast traffic on each port.

Syntax**switchport multicast packet-rate {1 | 2 | 3 | 4}**

- 1** - Threshold level represents 64 pps (packet per second).
- 2** - Threshold level represents 128 pps (packet per second).
- 3** - Threshold level represents 256 pps (packet per second).
- 4** - Threshold level represents 512 pps (packet per second).

Default Setting

Level 4

Command Mode

Interface Config

This command will protect your network from multicast storms by setting a threshold level for multicast traffic on all ports.

Syntax

```
switchport multicast all packet-rate {1 | 2 | 3 | 4}
```

- 1** - Threshold level represents 64 pps (packet per second).
- 2** - Threshold level represents 128 pps (packet per second).
- 3** - Threshold level represents 256 pps (packet per second).
- 4** - Threshold level represents 512 pps (packet per second).
- all** - This command represents all interfaces.

Default Setting

Level 4

Command Mode

Global Config

6.2.7.7 switchport unicast packet-rate

This command will protect your network from unicast storms by setting a threshold level for unicast traffic on each port.

Syntax

```
switchport unicast packet-rate {1 | 2 | 3 | 4}
```

- 1** - Threshold level represents 64 pps (packet per second).
- 2** - Threshold level represents 128 pps (packet per second).
- 3** - Threshold level represents 256 pps (packet per second).
- 4** - Threshold level represents 512 pps (packet per second).

Default Setting

Level 4

Command Mode

Interface Config

This command will protect your network from unicast storms by setting a threshold level for unicast traffic on all ports.

Syntax

```
switchport unicast all packet-rate {1 | 2 | 3 | 4}
```

- 1** - Threshold level represents 64 pps (packet per second).
- 2** - Threshold level represents 128 pps (packet per second).
- 3** - Threshold level represents 256 pps (packet per second).
- 4** - Threshold level represents 512 pps (packet per second).
- all** - This command represents all interfaces.

Default Setting

Level 4

Command Mode

Global Config

6.2.8 L2 Priority

6.2.8.1 show queue cos-map

This command displays the class of service priority map on specific interface.

Syntax

```
show queue cos-map [<unit/slot/port>]
```

<unit/slot/port> - Interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message**User Priority:** Displays the 802.1p priority to be mapped.**Traffic Class:** Displays internal traffic class to map the corresponding 802.1p priority.**6.2.8.2 queue cos-map**

This command is used to assign class of service (CoS) value to the CoS priority queue.

Syntax

```
queue cos-map <priority> <queue-id>
no queue cos-map
```

<queue-id> - The queue id of the CoS priority queue (Range: 0 - 7).

<priority> - The CoS value that is mapped to the queue id (Range: 0 - 7).

no - Sets the CoS map to the default values.

Default Setting

priority	queue
0	1
1	0
2	0
3	1
4	2
5	2
6	3
7	3

Command Mode

Interface Config

6.2.9 Port Mirror**6.2.9.1 show port-monitor session**

This command displays the Port monitoring information for the specified session.

Syntax

```
show port-monitor session <SessionNum>
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Session ID: indicates the session ID.

Admin Mode: indicates whether the Port Monitoring feature is enabled or disabled. The possible values are enabled and disabled.

Probe Port: is the unit/slot/port that is configured as the probe port. If this value has not been configured, 'Not Configured' will be displayed.

Mirrored Port: is the unit/slot/port that is configured as the monitored port. If this value has not been configured, 'Not Configured' will be displayed.

6.2.9.2 port-monitor session

This command configures a probe (destination) port or a mirrored (source) port for a monitor session (port monitoring). Users can add more than one mirrored port for a monitor session.

Syntax

```
port-monitor session <session-id> {(source | destination) interface <unit/slot/port> }  
no port-monitor session <session-id> { source | destination}
```

<unit/slot/port> - Interface number.

no - This command removes the probe port or the mirrored port from a monitor session (port monitoring).

Default Setting

None

Command Mode

Global Config

This command removes all configured probe ports and mirrored port.

Syntax

```
no port-monitor
```

Default Setting

None

Command Mode

Global Config

6.2.9.3 port-monitor session mode

This command configures the administration mode of port-monitoring function for a monitor session.

Syntax

```
port-monitor session <session-id> mode  
no port-monitor session <session-id> mode
```

<session-id> - Session ID.

no - This command disables port-monitoring function for a monitor session.

6.3 Management Commands**6.3.1 Network Commands****6.3.1.1 show ip interface**

This command displays configuration settings associated with the switch's network interface.

The network interface is the logical interface used for in-band connectivity with the switch via any of the switch's front panel ports. The configuration parameters associated with the switch's network interface do not affect the configuration of the front panel ports through which traffic is switched or routed.

Syntax

```
show ip interface
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

IP Address: The IP address of the interface. The factory default value is 0.0.0.0

Subnet Mask: The IP subnet mask for this interface. The factory default value is 0.0.0.0

Default Gateway: The default gateway for this IP interface. The factory default value is 0.0.0.0

Burned In MAC Address: The burned in MAC address used for in-band connectivity.

Network Configuration Protocol Current: Indicates which network protocol is being used. The options are bootp | dhcp | none.

DHCP Client Identifier TEXT: DHCP client identifier for this switch.

Management VLAN ID: Specifies the management VLAN ID.

Web Mode: Specifies whether the switch may be accessed from a Web browser. The factory default is enabled.

Web Port: This field is used to set the HTTP Port Number. The value must be in the range of 1 to 65535. Port 80 is the default value.

Java Mode: Specifies if the switch should allow access to the Java applet in the header frame. Enabled means the applet can be viewed. The factory default is disabled.

6.3.1.2 show ip filter

This command displays management IP filter status and all designated management stations.

Syntax

```
show ip filter
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Index: The index of stations.

IP Address: The IP address of stations that are allowed to make configuration changes to the Switch.

6.3.1.3 show ip ipv6

This command displays the IPv6 forwarding status of all ports.

Syntax

show ip ipv6

Default Setting

None

Command Mode

Privileged Exec

Display Message

Intf: Interface number

Type: Status of each interface for IPv6.

6.3.1.4 mtu

This command sets the maximum transmission unit (MTU) size (in bytes) for physical and port-channel (LAG) interfaces. For the standard implementation, the range of <1518-9216> is a valid integer between 1518-9216.

Syntax

mtu <1518-9216>

no mtu

<1518-9216> - Max frame size (Range: 1518 - 9216).

no - This command sets the default maximum transmission unit (MTU) size (in bytes) for the interface.

Default Setting

1518

Command Mode

Interface Config

6.3.1.5 interface vlan

This command is used to enter Interface-vlan configuration mode.

Syntax**interface vlan <vlanid>**

<vlanid> - VLAN ID (Range: 1 - 3965).

Default Setting

None

Command Mode

Global Config

6.3.1.6 ip address

This command sets the IP Address, and subnet mask. The IP Address and the gateway must be on the same subnet.

Syntax**ip address <ipaddr> <netmask>****no ip address**

<ipaddr> - IP address

<netmask> - Subnet Mask

no - Restore the default IP address and Subnet Mask

Default Setting

IP address: 0.0.0.0

Subnet Mask: 0.0.0.0

Command Mode

Interface-Vlan Config

Command Usage

Once the IP address is set, the VLAN ID's value will be assigned to management VLAN.

6.3.1.7 ip default-gateway

This command sets the IP Address of the default gateway.

Syntax

```
ip default-gateway <gateway>
no ip default-gateway
```

< gateway > - IP address of the default gateway

no - Restore the default IP address of the default gateway

Default Setting

IP address: 0.0.0.0

Command Mode

Global Config

6.3.1.8 ip address protocol

This command specifies the network configuration protocol to be used. If you modify this value, the change is effective immediately.

Syntax

ip address protocol {bootp dhcp none}
--

<bootp> - Obtains IP address from BOOTP.

<dhcp> - Obtains IP address from DHCP.

<none> - Obtains IP address by setting configuration.

Default Setting

None

Command Mode

Interface-Vlan Config

6.3.1.9 ip filter

This command is used to enable the IP filter function.

Syntax

ip filter no ip filter

no – Disable ip filter.

Default Setting

Disabled

Command Mode

Global Config

This command is used to set an IP address to be a filter.

Syntax

ip filter <ipaddr> no ip filter <ipaddr>

<ipaddr> - Configure a IP address to be a filter.

No - Remove this filter IP address.

Default Setting

None

Command Mode

Global Config

6.3.1.10 ip ipv6

This command is used to enable the Ipv6 function on specific interface.

Syntax

ip ipv6 no ip ipv6

no - disable IPv6.

Default Setting

Enabled

Command Mode

Interface Config

This command is used to enable the Ipv6 function on all interfaces.

Syntax

ip ipv6 all no ip ipv6 all

all - All interfaces.

no - disable IPv6.

Default Setting

Enabled

Command Mode

Global Config

6.3.2 Serial Interface Commands

6.3.2.1 show line console

This command displays serial communication settings for the switch.

Syntax
show line console

Default Setting

None

Command Mode

Privileged Exec

Display Message

Serial Port Login Timeout (minutes): Specifies the time, in minutes, of inactivity on a Serial port connection, after which the Switch will close the connection. Any numeric value between 0 and 160 is allowed, the factory default is 5. A value of 0 disables the timeout.

Baud Rate: The default baud rate at which the serial port will try to connect. The available values are 1200, 2400, 4800, 9600, 19200, 38400, 57600, and 115200 bauds.

Character Size: The number of bits in a character. The number of bits is always 8.

Flow Control: Whether Hardware Flow-Control is enabled or disabled. Hardware Flow Control is always disabled.

Stop Bits: The number of Stop bits per character. The number of Stop bits is always 1.

Parity: The Parity Method used on the Serial Port. The Parity Method is always None.

Password Threshold: When the logon attempt threshold is reached on the console port, the system interface becomes silent for a specified amount of time before allowing the next logon attempt. (Use the silent time command to set this interval.) When this threshold is reached for Telnet, the Telnet logon interface closes.

Silent Time (sec): Use this command to set the amount of time the management console is inaccessible after the number of unsuccessful logon attempts exceeds the threshold set by the password threshold command.

6.3.2.2 line console

This command is used to enter Line configuration mode

Syntax

line console

Default Setting

None

Command Mode

Global Config

6.3.2.3 baudrate

This command specifies the communication rate of the terminal interface. The supported rates are 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200.

Syntax

baudrate {1200 2400 4800 9600 19200 38400 57600 115200} no baudrate
--

no - This command sets the communication rate of the terminal interface to **115200**.

Default Setting

115200

Command Mode

Line Config

6.3.2.4 exec-timeout

This command specifies the maximum connect time (in minutes) without console activity. A value of 0 indicates that a console can be connected indefinitely. The time range is 0 to 160.

Syntax**exec-timeout <0-160>**

<0-160> - max connect time (Range: 0 -160).

no - This command sets the maximum connect time (in minutes) without console activity to 5.

Default Setting

5

Command Mode

Line Config

6.3.2.5 password-threshold

This command is used to set the password instruction threshold limiting the number of failed login attempts.

Syntax**password-threshold <0-120>****no password-threshold**

<threshold> - max threshold (Range: 0 - 120).

no - This command sets the maximum value to the default.

Default Setting

3

Command Mode

Line Config

6.3.2.6 silent-time

This command uses to set the amount of time the management console is inaccessible after the number of unsuccessful logon tries exceeds the threshold value.

Syntax**silent-time <0-65535>**

<0-65535> - silent time (Range: 0 - 65535) in seconds.

no - This command sets the maximum value to the default.

Default Setting

0

Command Mode

Line Config

6.3.3 Telnet Session Commands

6.3.3.1 telnet

This command establishes a new outbound telnet connection to a remote host.

Syntax**telnet <host> [port] [debug] [line] [echo]**

<host> - A hostname or a valid IP address.

[port] - A valid decimal integer in the range of 0 to 65535, where the default value is 23.

[debug] - Display current enabled telnet options.

[line] - Set the outbound telnet operational mode as 'linemode', where by default, the operational mode is 'character mode'.

[echo] - Enable local echo.

Default Setting

None

Command Mode

Privileged Exec

6.3.3.2 show line vty

This command displays telnet settings.

Syntax

show line vty

Default Setting

None

Command Mode

Privileged Exec

Display Message

Remote Connection Login Timeout (minutes): This object indicates the number of minutes a remote connection session is allowed to remain inactive before being logged off. A zero means there will be no timeout. May be specified as a number from 0 to 160. The factory default is 5.

Maximum Number of Remote Connection Sessions: This object indicates the number of simultaneous remote connection sessions allowed. The factory default is 5.

Allow New Telnet Sessions: Indicates that new telnet sessions will not be allowed when set to no. The factory default value is yes.

Password Threshold: When the logon attempt threshold is reached on the console port, the system interface becomes silent for a specified amount of time before allowing the next logon attempt. (Use the silent time command to set this interval.) When this threshold is reached for Telnet, the Telnet logon interface closes.

6.3.3.3 line vty

This command is used to enter vty (Telnet) configuration mode.

Syntax

line vty

Default Setting

None

Command Mode

Global Config

6.3.3.4 exec-timeout

This command sets the remote connection session timeout value, in minutes. A session is active as long as the session has been idle for the value set. A value of 0 indicates that a session remains active indefinitely. The time is a decimal value from 0 to 160.

Note: Changing the timeout value for active sessions does not become effective until the session is reaccessed. Any keystroke will also activate the new timeout duration.

Syntax
exec-timeout <1-160> no exec-timeout

<sec> - max connect time (Range: 1 -160).

no - This command sets the remote connection session timeout value, in minutes, to the default.

Note: Changing the timeout value for active sessions does not become effective until the session is reaccessed. Any keystroke will also activate the new timeout duration.

Default Setting

5

Command Mode

Telnet Config

6.3.3.5 password-threshold

This command is used to set the password instruction threshold limited for the number of failed login attempts.

Syntax
password-threshold <0-120> no password-threshold

<threshold> - max threshold (Range: 0 - 120).

no - This command sets the maximum value to the default.

Default Setting

3

Command Mode

Telnet Config

6.3.3.6 maxsessions

This command specifies the maximum number of remote connection sessions that can be established. A value of 0 indicates that no remote connection can be established. The range is 0 to 5.

Syntax**maxsessions <0-5>****no maxsessions**

<0-5> - max sessions (Range: 0 - 5).

no - This command sets the maximum value to be 5.

Default Setting

5

Command Mode

Telnet Config

6.3.3.7 sessions

This command regulates new telnet sessions. If sessions are enabled, new telnet sessions can be established until there are no more sessions available. If sessions are disabled, no new telnet sessions are established. An established session remains active until the session is ended or an abnormal network error ends it.

Syntax**sessions****no sessions**

no - This command disables telnet sessions. If sessions are disabled, no new telnet sessions are established.

Default Setting

Enabled

Command Mode

Telnet Config

6.3.3.8 telnet sessions

This command regulates new outbound telnet connections. If enabled, new outbound telnet sessions can be established until it reaches the maximum number of simultaneous outbound telnet sessions allowed. If disabled, no new outbound telnet session can be established. An established session remains active until the session is ended or an abnormal network error ends it.

Syntax
telnet sessions no telnet sessions

no - This command disables new outbound telnet connections. If disabled, no new outbound telnet connection can be established.

Default Setting

Enabled

Command Mode

Global Config

6.3.3.9 telnet maxsessions

This command specifies the maximum number of simultaneous outbound telnet sessions. A value of 0 indicates that no outbound telnet session can be established.

Syntax

```
telnet maxsessions <0-5>  
no maxsessions
```

<0-5> - max sessions (Range: 0 - 5).

no - This command sets the maximum value to be 5.

Default Setting

5

Command Mode

Global Config

6.3.3.10 telnet exec-timeout

This command sets the outbound telnet session timeout value in minute.

Note: Changing the timeout value for active sessions does not become effective until the session is reaccessed. Any keystroke will also activate the new timeout duration.

Syntax

```
telnet exec-timeout <1-160>  
no telnet exec-timeout
```

<1-160> - max connect time (Range: 1 -160).

no - This command sets the remote connection session timeout value, in minutes, to the default.

Note: Changing the timeout value for active sessions does not become effective until the session is reaccessed. Any keystroke will also activate the new timeout duration.

Default Setting

5

Command Mode

Global Config

6.3.3.11 show telnet

This command displays the current outbound telnet settings.

Syntax

show telnet

Default Setting

None

Command Mode

User Exec, Privileged Exec

Display Message

Outbound Telnet Login Timeout (in minutes) Indicates the number of minutes an outbound telnet session is allowed to remain inactive before being logged off. A value of 0, which is the default, results in no timeout.

Maximum Number of Outbound Telnet Sessions Indicates the number of simultaneous outbound telnet connections allowed.

Allow New Outbound Telnet Sessions Indicates whether outbound telnet sessions will be allowed.

6.3.4 SNMP Server Commands

6.3.4.1 show snmp

This command displays SNMP community information.

Six communities are supported. You can add, change, or delete communities. The switch does not have to be reset for changes to take effect.

The SNMP agent of the switch complies with SNMP versions 1, 2c, and 3 (for more about the SNMP specification, see the SNMP RFCs). The SNMP agent sends traps through TCP/IP to an external SNMP manager based on the SNMP configuration (the trap receiver and other SNMP community parameters).

Syntax

```
show snmp
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

SNMP Community Name: The community string to which this entry grants access. A valid entry is a case-sensitive alphanumeric string of up to 16 characters. Each row of this table must contain a unique community name.

Client IP Address: An IP address (or portion thereof) from which this device will accept SNMP packets with the associated community. The requesting entity's IP address is ANDed with the Subnet Mask before being compared to the IP Address. Note: that if the Subnet Mask is set to 0.0.0.0, an IP Address of 0.0.0.0 matches all IP addresses. The default value is 0.0.0.0

Client IP Mask: A mask to be ANDed with the requesting entity's IP address before comparison with IP Address. If the result matches with the IP Address then the address is an authenticated IP address. For example, if the IP Address = 9.47.128.0 and the corresponding Subnet Mask = 255.255.255.0, a range of incoming IP addresses would match. That is, the incoming IP Address could equal 9.47.128.0 - 9.47.128.255. The default value is 0.0.0.0.

Access Mode: The access level for this community string.

Status: The status of this community access entry.

6.3.4.2 show trapflags

This command displays trap conditions. Configure which traps the switch should generate by enabling or disabling the trap condition. If a trap condition is enabled and the condition is detected, the switch's SNMP agent sends the trap to all enabled trap receivers. The switch does not have to be reset to implement the changes. Cold and warm start traps are always generated and cannot be disabled.

Syntax

```
show trapflags
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Authentication Flag: May be enabled or disabled. The factory default is enabled. Indicates whether authentication failure traps will be sent.

Link Up/Down Flag: May be enabled or disabled. The factory default is enabled. Indicates whether link status traps will be sent.

Multiple Users Flag: May be enabled or disabled. The factory default is enabled. Indicates whether a trap will be sent when the same user ID is logged into the switch more than once at the same time (either via telnet or serial port).

Spanning Tree Flag: May be enabled or disabled. The factory default is enabled. Indicates whether spanning tree traps will be sent.

DVMRP Traps May be enabled or disabled. The factory default is disabled. Indicates whether DVMRP traps will be sent.

OSPF Traps May be enabled or disabled. The factory default is disabled. Indicates whether OSPF traps will be sent.

PIM Traps May be enabled or disabled. The factory default is disabled. Indicates whether PIM traps will be sent.

6.3.4.3 snmp-server sysname

This command sets the name of the switch. The range for name is from 1 to 31 alphanumeric characters.

Syntax

snmp-server sysname <name>

<name> - Range is from 1 to 31 alphanumeric characters.

Default Setting

None

Command Mode

Global Config

6.3.4.4 snmp-server location

This command sets the physical location of the switch. The range for name is from 1 to 31 alphanumeric characters.

Syntax

```
snmp-server location <loc>
```

<loc> - range is from 1 to 31 alphanumeric characters.

Default Setting

None

Command Mode

Global Config

6.3.4.5 snmp-server contact

This command sets the organization responsible for the network. The range for contact is from 1 to 31 alphanumeric characters.

Syntax

```
snmp-server contact <con>
```

<con> - Range is from 1 to 31 alphanumeric characters.

Default Setting

None

Command Mode

Global Config

6.3.4.6 snmp-server community

This command adds (and names) a new SNMP community. A community name is a name associated with the switch and with a set of SNMP managers that manage it with a specified privilege level. The length of the name can be up to 16 case-sensitive characters.

Note: Community names in the SNMP community table must be unique. If you make multiple entries using the same community name, the first entry is kept and processed and all duplicate

entries are ignored.

Syntax

```
snmp-server community <name>  
no snmp-server community <name>
```

<name> - community name (up to 16 case-sensitive characters).

no - This command removes this community name from the table. The name is the community name to be deleted.

Default Setting

Two default community names: public and private. You can replace these default community names with unique identifiers for each community. The default values for the remaining four community names are blank.

Command Mode

Global Config

This command activates an SNMP community. If a community is enabled, an SNMP manager associated with this community manages the switch according to its access right. If the community is disabled, no SNMP requests using this community are accepted. In this case the SNMP manager associated with this community cannot manage the switch until the Status is changed back to Enable.

Syntax

```
snmp-server community mode <name>  
no snmp-server community mode <name>
```

<name> - community name.

no - This command deactivates an SNMP community. If the community is disabled, no SNMP requests using this community are accepted. In this case the SNMP manager associated with this community cannot manage the switch until the Status is changed back to Enable.

Default Setting

The default public and private communities are enabled by default. The four undefined communities are disabled by default.

Command Mode

Global Config

This command sets a client IP mask for an SNMP community. The address is the associated community SNMP packet sending address and is used along with the client IP address value to denote a range of IP addresses from which SNMP clients may use that community to access the device. A value of 255.255.255.255 will allow access from only one station, and will use that machine's IP address for the client IP Address. A value of 0.0.0.0 will allow access from any IP address. The name is the applicable community name.

Syntax
snmp-server community ipmask <ipmask> <name> no snmp-server community ipmask <name>

<name> - community name.

<ipmask> - a client IP mask.

no - This command sets a client IP mask for an SNMP community to **0.0.0.0**. The name is the applicable community name. The community name may be up to 16 alphanumeric characters.

Default Setting

0.0.0.0

Command Mode

Global Config

This command restricts access to switch information. The access mode is read-only (also called public) or read/write (also called private).

Syntax

snmp-server community {ro | rw} <name>

<name> - community name.

<ro> - access mode is read-only.

<rw> - access mode is read/write.

Default Setting

None

Command Mode

Global Config

6.3.4.7 snmp-server host

This command sets a client IP address for an SNMP community. The address is the associated community SNMP packet sending address and is used along with the client IP mask value to denote a range of IP addresses from which SNMP clients may use that community to access the device. A value of 0.0.0.0 allows access from any IP address. Otherwise, this value is ANDed with the mask to determine the range of allowed client IP addresses. The name is the applicable community name.

Syntax

snmp-server host <ipaddr> <name>

no snmp-server host <name>

<name> - community name.

<ipaddr> - a client IP address.

no - This command sets a client IP address for an SNMP community to **0.0.0.0**. The name is the applicable community name.

Default Setting

0.0.0.0

Command Mode

Global Config

6.3.4.8 snmp-server enable traps

This command enables the Authentication trap.

Syntax

snmp-server enable traps authentication no snmp-server enable traps authentication

no - This command disables the Authentication trap.

Default Setting

Enabled

Command Mode

Global Config

This command enables the DVMRP trap.

Syntax

snmp-server enable traps dvmrp no snmp-server enable traps dvmrp

no - This command disables the DVMRP trap.

Default Setting

Enabled

Command Mode

Global Config

This command enables Link Up/Down traps for the entire switch. When enabled, link traps are sent only if the Link Trap flag setting associated with the port is enabled (see 'snmp trap link-status' command).

Syntax

snmp-server enable traps linkmode no snmp-server enable traps linkmode

no - This command disables Link Up/Down traps for the entire switch.

Default Setting

Enabled

Command Mode

Global Config

This command enables Multiple User traps. When the traps are enabled, a Multiple User Trap is sent when a user logs in to the terminal interface (EIA 232 or telnet) and there is an existing terminal interface session.

Syntax

snmp-server enable traps multiusers no snmp-server enable traps multiusers

no - This command disables Multiple User trap.

Default Setting

Enabled

Command Mode

Global Config

This command enables OSPF traps.

Syntax

snmp-server enable traps ospf no snmp-server enable traps ospf

no - This command disables OSPF trap.

Default Setting

Enabled

Command Mode

Global Config

This command enables PIM traps.

Syntax

```
snmp-server enable traps pim  
no snmp-server enable traps pim
```

no - This command disables PIM trap.

Default Setting

Enabled

Command Mode

Global Config

This command enables the sending of new root traps and topology change notification traps.

Syntax

```
snmp-server enable traps stpmode  
no snmp-server enable traps stpmode
```

no - This command disables the sending of new root traps and topology change notification traps.

Default Setting

Enabled

Command Mode

Global Config

6.3.5 SNMP Trap Commands

6.3.5.1 show snmptrap

This command displays SNMP trap receivers. Trap messages are sent across a network to an SNMP Network Manager. These messages alert the manager to events occurring within the switch or on the network. Six trap receivers are simultaneously supported.

Syntax
show snmptrap

Default Setting

None

Command Mode

Privileged Exec

Display Message

SNMP Trap Name: The community string of the SNMP trap packet sent to the trap manager. This may be up to 16 alphanumeric characters. This string is case sensitive.

IP Address: The IP address to receive SNMP traps from this device. Enter 4 numbers between 0 and 255 separated by periods.

SNMP Version: The trap version to be used by the receiver.

SNMP v1 – Uses SNMP v1 to send traps to the receiver

SNMP v2 – Uses SNMP v2 to send traps to the receiver

Status: A pull down menu that indicates the receiver's status (enabled or disabled) and allows the administrator/user to perform actions on this user entry:

Enable: send traps to the receiver

Disable: do not send traps to the receiver.

Delete: remove the table entry.

6.3.5.2 snmp trap link-status

This command enables link status traps by interface.

Note: This command is valid only when the Link Up/Down Flag is enabled. See 'snmpserver enable traps linkmode' command.

Syntax

snmp trap link-status no snmp trap link-status

no - This command disables link status traps by interface.

Note: This command is valid only when the Link Up/Down Flag is enabled. (See 'snmpserver enable traps linkmode' command.)

Default Setting

Disabled

Command Mode

Interface Config

This command enables link status traps for all interfaces.

Note: This command is valid only when the Link Up/Down Flag is enabled (See 'snmpserver enable traps linkmode' command.)

Syntax

snmp trap link-status all no snmp trap link-status all

all - All interfaces.

no - This command disables link status traps for all interfaces.

Note: This command is valid only when the Link Up/Down Flag is enabled (see "snmpserver enable traps linkmode").

Default Setting

Disabled

Command Mode

Global Config

6.3.5.3 snmptrap <name> <ipaddr>

This command adds an SNMP trap name. The maximum length of the name is 16 case-sensitive alphanumeric characters.

Syntax

<pre>snmptrap <name> <ipaddr> no snmptrap <name> <ipaddr></pre>

<name> - SNMP trap name (Range: up to 16 case-sensitive alphanumeric characters).

<ipaddr> - an IP address of the trap receiver.

no - This command deletes trap receivers for a community.

Default Setting

None

Command Mode

Global Config

6.3.5.4 snmptrap ipaddr

This command changes the IP address of the trap receiver for the specified community name. The maximum length of name is 16 case-sensitive alphanumeric characters.

Note: IP addresses in the SNMP trap receiver table must be unique for the same community name. If you make multiple entries using the same IP address and community name, the first entry is retained and processed. All duplicate entries are ignored.

Syntax

<pre>snmptrap ipaddr <name> <ipaddr> <ipaddrnew></pre>
--

<name> - SNMP trap name.

<ipaddr> - an original IP address.

<ipaddrnew> - a new IP address.

Default Setting

None

Command Mode

Global Config

6.3.5.5 snmptrap mode

This command activates or deactivates an SNMP trap. Enabled trap receivers are active (able to receive traps). Disabled trap receivers are inactive (not able to receive traps).

Syntax

```
snmptrap mode <name> <ipaddr>  
no snmptrap mode <name> <ipaddr>
```

<name> - SNMP trap name.

<ipadd> - an IP address.

no - This command deactivates an SNMP trap. Trap receivers are inactive (not able to receive traps).

Default Setting

None

Command Mode

Global Config

6.3.6 HTTP commands**6.3.6.1 show ip http**

This command displays the http settings for the switch.

Syntax

```
show ip http
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

HTTP Mode (Unsecure): This field indicates whether the HTTP mode is enabled or disabled.

HTTP Port: This field specifies the port configured for HTTP.

HTTP Mode (Secure): This field indicates whether the administrative mode of secure HTTP is enabled or disabled.

Secure Port: This field specifies the port configured for SSLT.

Secure Protocol Level(s): The protocol level may have the values of SSL3, TSL1, or both SSL3 and TSL1.

6.3.6.2 ip javamode

This command specifies whether the switch should allow access to the Java applet in the header frame of the Web interface. When access is enabled, the Java applet can be viewed from the Web interface. When access is disabled, the user cannot view the Java applet.

Syntax
ip javamode no ip javamode

no - This command disallows access to the Java applet in the header frame of the Web interface. When access is disabled, the user cannot view the Java applet.

Default Setting

Enabled

Command Mode

Global Config

6.3.6.3 ip http port

This command is used to set the http port where port can be 1-65535 and the default is port 80.

Syntax

```
ip http port <1-65535>
no ip http port
```

<1-65535> - HTTP Port value.

no - This command is used to reset the http port to the default value.

Default Setting

80

Command Mode

Global Config

6.3.6.4 ip http server

This command enables access to the switch through the Web interface. When access is enabled, the user can login to the switch from the Web interface. When access is disabled, the user cannot login to the switch's Web server.

Disabling the Web interface takes effect immediately. All interfaces are affected.

Syntax

```
ip http server
no ip http server
```

no - This command disables access to the switch through the Web interface. When access is disabled, the user cannot login to the switch's Web server.

Default Setting

Enabled

Command Mode

Global Config

6.3.6.5 ip http secure-port

This command is used to set the SSLT port where port can be 1-65535 and the default is port 443.

Syntax

ip http secure-port <portid> no ip http secure-port
--

<portid> - SSLT Port value.

no - This command is used to reset the SSLT port to the default value.

Default Setting

443

Command Mode

Global Config

6.3.6.6 ip http secure-server

This command is used to enable the secure socket layer for secure HTTP.

Syntax

ip http secure-server no ip http secure-server

no - This command is used to disable the secure socket layer for secure HTTP.

Default Setting

Disabled

Command Mode

Global Config

6.3.6.7 ip http secure-protocol

This command is used to set protocol levels (versions). The protocol level can be set to TLS1, SSL3 or to both TLS1 and SSL3.

Syntax

```
ip http secure-protocol <protocollevel1> [protocollevel2]  
no ip http secure-protocol <protocollevel1> [protocollevel2]
```

<protocollevel1 - 2> - The protocol level can be set to TLS1, SSL3 or to both TLS1 and SSL3.

no - This command is used to remove protocol levels (versions) for secure HTTP.

Default Setting

SSL3 and TLS1

Command Mode

Global Config

6.3.7 Secure Shell (SSH) Commands

6.3.7.1 show ip ssh

This command displays the SSH settings.

Syntax

```
show ip ssh
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Administrative Mode: This field indicates whether the administrative mode of SSH is enabled or disabled.

Protocol Levels: The protocol level may have the values of version 1, version 2, or both versions.

SSH Sessions Currently Active: This field specifies the current number of SSH

connections.

Max SSH Sessions Allowed: The maximum number of inbound SSH sessions allowed on the switch.

SSH Timeout: This field is the inactive timeout value for incoming SSH sessions to the switch.

6.3.7.2 ip ssh

This command is used to enable SSH.

Syntax
ip ssh no ip ssh

no - This command is used to disable SSH.

Default Setting

Disabled

Command Mode

Global Config

6.3.7.3 ip ssh protocol

This command is used to set or remove protocol levels (or versions) for SSH. Either SSH1 (1), SSH2 (2), or both SSH 1 and SSH 2 (1 and 2) can be set.

Syntax
ip ssh protocol <protocollevel1> [protocollevel2]

<protocollevel1 - 2> - The protocol level can be set to SSH1, SSH2 or to both SSH 1 and SSH 2.

Default Setting

SSH1 and SSH2

Command Mode

Global Config

6.3.7.4 ip ssh maxsessions

This command specifies the maximum number of SSH connection sessions that can be established. A value of 0 indicates that no ssh connection can be established. The range is 0 to 5.

Syntax

```
ip ssh maxsessions <0-5>
no ip ssh maxsessions
```

<0-5> - maximum number of sessions.

no - This command sets the maximum number of SSH connection sessions that can be established to the default value.

Default Setting

SSH1 and SSH2

Command Mode

Global Config

6.3.7.5 ip ssh timeout

This command sets the SSH connection session timeout value, in minutes. A session is active as long as the session has been idle for the value set. A value of 0 indicates that a session remains active indefinitely. The time is a decimal value from 0 to 160. Changing the timeout value for active sessions does not become effective until the session is reaccessed. Any keystroke will also activate the new timeout duration.

Syntax

ip ssh timeout <1-160> no ip ssh timeout

<1-160> - timeout interval in seconds.

no - This command sets the SSH connection session timeout value, in minutes, to the default. Changing the timeout value for active sessions does not become effective until the session is reaccessed. Any keystroke will also activate the new timeout duration.

Default Setting

5

Command Mode

Global Config

6.3.8 DHCP Client Commands

6.3.8.1 ip dhcp restart

This command is used to initiate a BOOTP or DHCP client request.

Syntax

ip dhcp restart

Default Setting

None

Command Mode

Global Config

6.3.8.2 ip dhcp client-identifier

This command is used to specify the DHCP client identifier for this switch. Use the **no** form to restore to default value.

Syntax

```
ip dhcp client-identifier {text <text> | hex <hex>}  
no ip dhcp client-identifier
```

<text> - A text string. (Range: 1-15 characters).

<hex> - The hexadecimal value (00:00:00:00:00:00).

no - This command is used to restore to default value.

Default Setting

System Burned In MAC Address

Command Mode

Global Config

6.3.9 DHCP Relay Commands

6.3.9.1 Show bootpdhcprelay

This command is used to display the DHCP relay agent configuration information on the system.

Syntax

```
show bootpdhcprelay
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Maximum Hop Count - The maximum number of Hops a client request can go without being discarded.

Minimum Wait Time (Seconds) - The Minimum time in seconds. This value will be compared to the time stamp in the client's request packets, which should represent the time since the client was powered up. Packets will only be forwarded when the time stamp exceeds the minimum wait time.

Admin Mode - Administrative mode of the relay. When you select 'enable' BOOTP/DHCP requests will be forwarded to the IP address you entered in the 'Server IP address' field.

Server IP Address - IP address of the BOOTP/DHCP server or the IP address of the next BOOTP/DHCP Relay Agent.

Circuit Id Option Mode - This is the Relay agent option which can be either enabled or disabled. When enabled Relay Agent options will be added to requests before they are forwarded to the server and removed from replies before they are forwarded to clients.

Requests Received - The total number of BOOTP/DHCP requests received from all clients since the last time the switch was reset.

Requests Relayed - The total number of BOOTP/DHCP requests forwarded to the server since the last time the switch was reset.

Packets Discarded - The total number of BOOTP/DHCP packets discarded by this Relay Agent since the last time the switch was reset.

6.3.9.2 Bootpdhcprelay maxhopcount

This command is used to set the maximum relay agent hops for BootP/DHCP Relay on the system.

Syntax

bootpdhcprelay maxhopcount <1-16> no bootpdhcprelay maxhopcount
--

<1-16> - maximum number of hops. (Range: 1-16).

no - This command is used to reset to the default value.

Default Setting

4

Command Mode

Global Config

6.3.9.3 Bootpdhcprelay serverip

This command is used to configure the server IP Address for BootP/DHCP Relay on the system.

Syntax

```
bootpdhcprelay serverip <ipaddr>  
no bootpdhcprelay serverip
```

<ipaddr> - A server IP address.

no - This command is used to reset to the default value.

Default Setting

IP 0.0.0.0

Command Mode

Global Config

6.4 Spanning Tree Commands

This section provides detailed explanation of the spanning tree commands. The commands are divided into two functional groups:

- Show commands display spanning tree settings, statistics, and other information.
- Configuration Commands configure features and options of the switch. For every configuration command there is a show command that displays the configuration setting.

6.4.1 Show Commands

6.4.1.1 show spanning-tree

This command displays spanning tree settings for the common and internal spanning tree. The following details are displayed.

Syntax

```
show spanning-tree
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Bridge Priority: Configured value.

Bridge Identifier: The MAC Address for the Bridge from which the Bridge Identifiers used by the Spanning Tree Algorithm and Protocol.

Time Since Topology Change: In seconds.

Topology Change Count: Number of times changed.

Topology Change in progress: Boolean value of the Topology Change parameter for the switch indicating if a topology change is in progress on any port assigned to the common and internal spanning tree.

Designated Root: The Bridge Identifier of the Root Bridge for the spanning tree instance identified by the MSTID.

Root Path Cost: Value of the Root Path Cost parameter for the common and internal spanning tree.

Root Port Identifier: The Root Port for the spanning tree instance identified by the MSTID.

Bridge Max Age: Maximum message age.

Bridge Max Hops: The maximum number of hops for the spanning tree.

Bridge Forwarding Delay: A timeout value to be used by all Bridges in the Bridged LAN. The value of Forward Delay is set by the Root.

Hello Time: The time interval between the generations of Configuration BPDUs.

Bridge Hold Time: Minimum time between transmissions of Configuration Bridge Protocol Data Units (BPDUs).

CST Regional Root: The Bridge Identifier of the current CST Regional Root.

Regional Root Path Cost: The path cost to the regional root.

Associated FIDs: List of forwarding database identifiers currently associated with this instance.

Associated VLANs: List of VLAN IDs currently associated with this instance.

6.4.1.2 show spanning-tree interface

This command displays the settings and parameters for a specific switch port within the common and internal spanning tree. The <unit/slot/port> is the desired switch port. The following details are displayed on execution of the command.

Syntax

show spanning-tree interface <unit/slot/port>
--

<unit/slot/port> - is the desired interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Port Mode: The administration mode of spanning tree.

Port Up Time Since Counters Last Cleared: Time since the port was reset, displayed in days, hours, minutes, and seconds.

STP BPDUs Transmitted: Spanning Tree Protocol Bridge Protocol Data Units sent.

STP BPDUs Received: Spanning Tree Protocol Bridge Protocol Data Units received.

RST BPDUs Transmitted: Rapid Spanning Tree Protocol Bridge Protocol Data Units sent.

RST BPDUs Received: Rapid Spanning Tree Protocol Bridge Protocol Data Units received.

MSTP BPDUs Transmitted: Multiple Spanning Tree Protocol Bridge Protocol Data Units sent.

MSTP BPDUs Received: Multiple Spanning Tree Protocol Bridge Protocol Data Units received.

6.4.1.3 show spanning-tree vlan

This command displays the association between a VLAN and a multiple spanning tree instance. The <1-3965> corresponds to an existing VLAN ID.

Syntax

show spanning-tree vlan <1-3965>

<vlanid> - VLAN ID (Range: 1 - 3965).

Default Setting

None

Command Mode

Privileged Exec

Display Message

VLAN Identifier: displays VLAN ID.

Associated Instance: Identifier for the associated multiple spanning tree instance or "CST" if associated with the common and internal spanning tree.

6.4.1.4 show spanning-tree mst

This command displays settings and parameters for the specified multiple spanning tree instance. The instance <0-4094> is a number that corresponds to the desired existing multiple spanning tree instance ID. The following details are displayed.

Syntax

show spanning-tree mst detailed <0-4094>

<0-4094> - multiple spanning tree instance ID.

Default Setting

None

Command Mode

Privileged Exec

Display Message

MST Instance ID: The multiple spanning tree instance ID.

MST Bridge Priority: The bridge priority of current MST.

MST Bridge Identifier: The bridge ID of current MST.

Time Since Topology Change: In seconds.

Topology Change Count: Number of times the topology has changed for this multiple spanning tree instance.

Topology Change in Progress: Value of the Topology Change parameter for the multiple spanning tree instance.

Designated Root: Identifier of the Regional Root for this multiple spanning tree instance.

Root Path Cost: Path Cost to the Designated Root for this multiple spanning tree instance.

Root Port Identifier: Port to access the Designated Root for this multiple spanning tree instance

Associated FIDs: List of forwarding database identifiers associated with this instance.

Associated VLANs: List of VLAN IDs associated with this instance.

This command displays summary information about all multiple spanning tree instances in the switch. On execution, the following details are displayed.

Syntax

show spanning-tree mst summary

Default Setting

None

Command Mode

Privileged Exec

Display Message**MST Instance ID List:** List of multiple spanning trees IDs currently configured.**For each MSTID:** The multiple spanning tree instance ID.**Associated FIDs:** List of forwarding database identifiers associated with this instance.**Associated VLANs:** List of VLAN IDs associated with this instance.

This command displays the detailed settings and parameters for a specific switch port within a particular multiple spanning tree instance. The instance <mstid> is a number that corresponds to the desired existing multiple spanning tree instance. The <unit/slot/port> is the desired switch port.

Syntax**show spanning-tree mst port detailed <0-4094> <unit/slot/port>**

<0-4094> - multiple spanning tree instance ID.

<unit/slot/port> - is the desired interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message**MST Instance ID:** The multiple spanning tree instance ID.**Port Identifier:** The unique value to identify a port on that Bridge.**Port Priority:** The priority of the port within the MST.**Port Forwarding State:** Current spanning tree state of this port.**Port Role:** Indicate the port role is root or designate.**Auto-calculate Port Path Cost:** Indicate the port auto-calculate port path cost.**Port Path Cost:** Configured value of the Internal Port Path Cost parameter.**Designated Root:** The Identifier of the designated root for this port.**Designated Port Cost:** Path Cost offered to the LAN by the Designated Port.**Designated Bridge:** Bridge Identifier of the bridge with the Designated Port.**Designated Port Identifier:** Port on the Designated Bridge that offers the lowest cost to the

LAN.

If 0 (defined as the default CIST ID) is passed as the <0-4094>, then this command displays the settings and parameters for a specific switch port within the common and internal spanning tree. The <unit/slot/port> is the desired switch port. In this case, the following are displayed.

Port Identifier: The port identifier for this port within the CST.

Port Priority: The priority of the port within the CST.

Port Forwarding State: The forwarding state of the port within the CST.

Port Role: The role of the specified interface within the CST.

Auto-calculate Port Path Cost: Indicate the port auto-calculate port path cost

Auto-calculate External Port Path Cost - Displays whether the external path cost is automatically calculated (Enabled) or not (Disabled). External Path cost will be calculated based on the link speed of the port if the configured value for External Port Path Cost is zero.

External Port Path Cost - The External Path Cost of the specified port in the spanning tree.

Port Path Cost: The configured path cost for the specified interface.

Designated Root: Identifier of the designated root for this port within the CST.

Designated Port Cost: Path Cost offered to the LAN by the Designated Port.

Designated Bridge: The bridge containing the designated port.

Designated Port Identifier: Port on the Designated Bridge that offers the lowest cost to the LAN.

Topology Change Acknowledgement: Value of flag in next Configuration Bridge Protocol Data Unit (BPDU) transmission indicating if a topology change is in progress for this port.

Hello Time: The hello time in use for this port.

Edge Port: The configured value indicating if this port is an edge port.

Edge Port Status: The derived value of the edge port status. True if operating as an edge port; false otherwise.

Point To Point MAC Status: Derived value indicating if this port is part of a point to point link.

CST Regional Root: The regional root identifier in use for this port.

CST Port Cost: The configured path cost for this port.

This command displays the settings of one or all ports within the specified multiple spanning tree instance. The parameter <0-4094> indicates a particular MST instance. The parameter {<unit/slot/port> | all} indicates the desired switch port or all ports.

If 0 (defined as the default CIST ID) is passed as the <0-4094>, then the status summary is displayed for one or all ports within the common and internal spanning tree.

Syntax

```
show spanning-tree mst port summary <0-4094> {<unit/slot/port> | all}
```

<0-4094> - multiple spanning tree instance ID.

<unit/slot/port> - is the desired interface number.

all - All interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

MST Instance ID: The MST instance associated with this port.

Interface: The interface being displayed.

STP Mode: Indicate STP mode.

Type: Currently not used.

STP State: The forwarding state of the port in the specified spanning tree instance.

Port Role: The role of the specified port within the spanning tree.

6.4.1.5 show spanning-tree summary

This command displays spanning tree settings and parameters for the switch. The following details are displayed on execution of the command.

Syntax

show spanning-tree summary

Default Setting

None

Command Mode

Privileged Exec

Display Message

Spanning Tree Adminmode: Enabled or disabled.

Spanning Tree Version: Version of 802.1 currently supported (IEEE 802.1s, IEEE 802.1w, or IEEE 802.1d) based upon the Force Protocol Version parameter.

Configuration Name: TConfigured name.

Configuration Revision Level: Configured value.

Configuration Digest Key: Calculated value.

Configuration Format Selector: Configured value.

MST Instances: List of all multiple spanning tree instances configured on the switch.

6.4.1.6 show spanning-tree brief

This command displays spanning tree settings for the bridge. In this case, the following details are displayed.

Syntax

show spanning-tree brief

Default Setting

None

Command Mode

Privileged Exec

Display Message

Bridge Priority: Configured value.

Bridge Identifier: The bridge ID of current Spanning Tree.

Bridge Max Age: Configured value.

Bridge Hello Time: Configured value.

Bridge Forward Delay: Configured value.

Bridge Hold Time: Minimum time between transmission of Configuration Bridge Protocol Data Units (BPDUs).

6.4.2 Configuration Commands

6.4.2.1 spanning-tree

This command sets the spanning-tree operational mode to be enabled.

Syntax

spanning-tree

no spanning-tree

no - This command sets the spanning-tree operational mode to be disabled. While disabled, the spanning-tree configuration is retained and can be changed, but is not activated.

Default Setting

Disabled

Command Mode

Global Config

6.4.2.2 spanning-tree protocol-migration

This command enables BPDU migration check on a given interface. The **all** option enables BPDU migration check on all interfaces.

Syntax

```
spanning-tree protocol-migration {<unit/slot/port> | all}  
no spanning-tree protocol-migration {<unit/slot/port> | all}
```

<unit/slot/port> - is the desired interface number.

all - All interfaces.

no - This command disables BPDU migration check on a given interface. The **all** option disables BPDU migration check on all interfaces.

Default Setting

None

Command Mode

Global Config

6.4.2.3 spanning-tree configuration

This command sets the Configuration Identifier Name for use in identifying the configuration that this switch is currently using. The **<name>** is a string of at most 32 alphanumeric characters.

Syntax

```
spanning-tree configuration name <name>  
no spanning-tree configuration name
```

<name> - is a string of at most 32 alphanumeric characters.

no - This command resets the Configuration Identifier Name to its default.

Default Setting

The base MAC address displayed using hexadecimal notation as specified in IEEE 802 standard.

Command Mode

Global Config

This command sets the Configuration Identifier Revision Level for use in identifying the configuration that this switch is currently using. The Configuration Identifier Revision Level is a number in the range of 0 to 65535.

Syntax
spanning-tree configuration revision <0-65535> no spanning-tree configuration revision

<value> - Revision Level is a number in the range of 0 to 65535.

no - This command sets the Configuration Identifier Revision Level for use in identifying the configuration that this switch is currently using to the default value, that is, 0.

Default Setting

0

Command Mode

Global Config

6.4.2.4 spanning-tree mode

This command sets the Force Protocol Version parameter to a new value. The Force Protocol Version can be one of the following:

1. stp - ST BPDUs are transmitted rather than MST BPDUs (IEEE 802.1d functionality supported)
2. rstp - RST BPDUs are transmitted rather than MST BPDUs (IEEE 802.1w functionality supported)

3. mstp - MST BPDUs are transmitted (IEEE 802.1s functionality supported)

Syntax

```
spanning-tree mode {stp | rstp | mstp}  
no spanning-tree mode
```

no - This command sets the Force Protocol Version parameter to the default value, that is, mstp.

Default Setting

mstp

Command Mode

Global Config

6.4.2.5 spanning-tree forward-time

This command sets the Bridge Forward Delay parameter to a new value for the common and internal spanning tree. The forward-time value is in seconds within a range of 4 to 30, with the value being greater than or equal to "(Bridge Max Age / 2) + 1".

Syntax

```
spanning-tree forward-time <4-30>  
no spanning-tree forward-time
```

<4-30> - forward time value (Range: 4 – 30).

no - This command sets the Bridge Forward Delay parameter for the common and internal spanning tree to the default value, that is, 15.

Default Setting

15

Command Mode

Global Config

6.4.2.6 spanning-tree hello-time

This command sets the Hello Time parameter to a new value for the common and internal spanning tree. The hellotime value is in whole seconds within a range of 1 to 10 with the value being less than or equal to "(Bridge Max Age / 2) - 1".

Syntax

spanning-tree hello-time <1-10> no spanning-tree hello-time
--

<1-10> - hellotime value (Range: 1 – 10).

no - This command sets the Hello Time parameter for the common and internal spanning tree to the default value, that is, 2.

Default Setting

2

Command Mode

Global Config

6.4.2.7 spanning-tree max-age

This command sets the Bridge Max Age parameter to a new value for the common and internal spanning tree. The max-age value is in seconds within a range of 6 to 40, with the value being less than or equal to "2 times (Bridge Forward Delay - 1)" and greater than or equal to "2 times (Bridge Hello Time + 1)".

Syntax

spanning-tree max-age <6-40> no spanning-tree max-age
--

<6-40> - the Bridge Max Age value (Range: 6 – 40).

no - This command sets the Bridge Max Age parameter for the common and internal spanning tree to the default value, that is, 20.

Default Setting

20

Command Mode

Global Config

6.4.2.8 spanning-tree max-hops

This command sets the MSTP Max Hops parameter to a new value for the common and internal spanning tree. The max-hops value is in a range of 1 to 127.

Syntax

```
spanning-tree max-hops <1-127>  
no spanning-tree max-hops
```

<1-127> - the Maximum hops value (Range: 1-127).

no - This command sets the Bridge Max Hops parameter for the common and internal spanning tree to the default value.

Default Setting

20

Command Mode

Global Config

6.4.2.9 spanning-tree mst

This command adds a multiple spanning tree instance to the switch. The instance <1-3965> is a number within a range of 1 to 3965 that corresponds to the new instance ID to be added. The maximum number of multiple instances supported is 4.

Syntax

```
spanning-tree mst instance <1-4094>  
no spanning-tree mst instance <1-4094>
```

<1-4094> - multiple spanning tree instance ID.

no - This command removes a multiple spanning tree instance from the switch and reallocates all VLANs allocated to the deleted instance to the common and internal spanning tree. The instance **<1-3965>** is a number that corresponds to the desired existing multiple spanning tree instance to be removed.

Default Setting

None

Command Mode

Global Config

This command sets the bridge priority for a specific multiple spanning tree instance. The instance **<mstid>** is a number that corresponds to the desired existing multiple spanning tree instance. The priority value is a number within a range of 0 to 61440 in increments of 4096.

If 0 (defined as the default CIST ID) is passed as the **<mstid>**, then this command sets the Bridge Priority parameter to a new value for the common and internal spanning tree. The bridge priority value again is a number within a range of 0 to 61440. The twelve least significant bits will be masked according to the 802.1s specification.

This will cause the priority to be rounded down to the next lower valid priority.

Syntax
spanning-tree mst priority <0-4094> <0-61440> no spanning-tree mst priority <0-4094>

<0-4094> - multiple spanning tree instance ID.

<0-61440> - priority value (Range: 0 – 61440).

no - This command sets the bridge priority for a specific multiple spanning tree instance to the default value, that is, 32768. The instance **<0-4094>** is a number that corresponds to the desired existing multiple spanning tree instance.

If 0 (defined as the default CIST ID) is passed as the **<0-4094>**, then this command sets the Bridge Priority parameter for the common and internal spanning tree to the default value, that is, 32768.

Default Setting

32768

Command Mode

Global Config

This command adds an association between a multiple spanning tree instance and a VLAN. The VLAN will no longer be associated with the common and internal spanning tree. The instance <0-4094> is a number that corresponds to the desired existing multiple spanning tree instance. The <1-3965> corresponds to an existing VLAN ID.

Syntax

```
spanning-tree mst vlan <0-4094> <1-3965>  
no spanning-tree mst vlan <0-4094> <1-3965>
```

<0-4094> - multiple spanning tree instance ID.

<1-3965> - VLAN ID (Range: 1 – 3965).

no - This command removes an association between a multiple spanning tree instance and a VLAN. The VLAN will again be associated with the common and internal spanning tree. The instance <0-4094> is a number that corresponds to the desired existing multiple spanning tree instance. The <1-3965> corresponds to an existing VLAN ID.

Default Setting

None

Command Mode

Global Config

This command sets the Path Cost or Port Priority for this port within the multiple spanning tree instance or in the common and internal spanning tree. If the <0-4094> parameter corresponds to an existing multiple spanning tree instance, then the configurations are done for that multiple spanning tree instance. If however 0 (defined as the default CIST ID) is passed as the <0-4094>, then the configurations are performed for the common and internal spanning tree instance.

If the 'cost' token is specified, this command sets the path cost for this port within a multiple spanning tree instance or the common and internal spanning tree instance, depending on the <0-4094> parameter. The pathcost can be specified as a number in the range of 1 to 200000000 or auto. If "auto" is specified, the pathcost value will be set based on Link Speed.

Syntax

```
spanning-tree mst <0-4094> cost {<1-2000000000> | auto}  
no spanning-tree mst <0-4094> cost
```

<0-4094> - multiple spanning tree instance ID.

no - This command sets the Path Cost or Port Priority for this port within the multiple spanning tree instance or in the common and internal spanning tree to the respective default values. If the <0-4094> parameter corresponds to an existing multiple spanning tree instance, then the configurations are done for that multiple spanning tree instance. If however, 0 (defined as the default CIST ID) is passed as the <0-4094>, then the configurations are performed for the common and internal spanning tree instance.

If the 'cost' token is specified, this command sets the path cost for this port within a multiple spanning tree instance or the common and internal spanning tree instance, depending on the <0-4094> parameter, to the default value, that is, a pathcost value based on the Link Speed.

Default Setting

Cost : auto

Command Mode

Interface Config

This command sets the Path Cost or Port Priority for this port within the multiple spanning tree instance or in the common and internal spanning tree. If the <0-4094> parameter corresponds to an existing multiple spanning tree instance, then the configurations are done for that multiple spanning tree instance. If however 0 (defined as the default CIST ID) is passed as the <0-4094>, then the configurations are performed for the common and internal spanning tree instance.

If the 'port-priority' token is specified, this command sets the priority for this port within a specific multiple spanning tree instance or the common and internal spanning tree instance, depending on the <0-4094> parameter. The port-priority value is a number in the range of 0 to 240 in increments of 16.

Syntax

```
spanning-tree mst <0-4094> port-priority <0-240>  
no spanning-tree mst <0-4094> port-priority
```

<0-4094> - multiple spanning tree instance ID.

no - This command sets the Path Cost or Port Priority for this port within the multiple spanning tree instance or in the common and internal spanning tree to the respective default values. If the <0-4094> parameter corresponds to an existing multiple spanning tree instance, then the configurations are done for that multiple spanning tree instance. If however, 0 (defined as the default CIST ID) is passed as the <0-4094>, then the configurations are performed for the common and internal spanning tree instance.

If the 'port-priority' token is specified, this command sets the priority for this port within a specific multiple spanning tree instance or the common and internal spanning tree instance, depending on the <0-4094> parameter, to the default value, that is, 128.

Default Setting

port-priority : 128

Command Mode

Interface Config

6.4.2.10 spanning-tree port mode

This command sets the Administrative Switch Port State for this port to enabled.

Syntax
spanning-tree port mode no spanning-tree port mode

no - This command sets the Administrative Switch Port State for this port to disabled.

Default Setting

Disabled

Command Mode

Interface Config

This command sets the Administrative Switch Port State for all ports to enabled.

Syntax

```
spanning-tree port mode all  
no spanning-tree port mode all
```

all - All interfaces.

no - This command sets the Administrative Switch Port State for all ports to disabled.

Default Setting

Disabled

Command Mode

Global Config

6.4.2.11 spanning-tree edgeport

This command specifies that this port is an Edge Port within the common and internal spanning tree. This will allow this port to transition to Forwarding State without delay.

Syntax

```
spanning-tree edgeport  
no spanning-tree edgeport
```

no - This command specifies that this port is not an Edge Port within the common and internal spanning tree.

Default Setting

None

Command Mode

Interface Config

6.5 System Log Management Commands**6.5.1 Show Commands**

6.5.1.1 show logging

This command displays logging.

Syntax

show logging

Default Setting

None

Command Mode

Privileged Exec

Display Message

Logging Client Local Port The port on the collector/relay to which syslog messages are sent

CLI Command Logging The mode for CLI command logging.

Console Logging The mode for console logging.

Console Logging Severity Filter The minimum severity to log to the console log. Messages with an equal or lower numerical severity are logged.

Buffered Logging The mode for buffered logging.

Syslog Logging The mode for logging to configured syslog hosts. If set to disable logging stops to all syslog hosts.

Log Messages Received The number of messages received by the log process. This includes messages that are dropped or ignored

Log Messages Dropped The number of messages that could not be processed.

Log Messages Relayed The number of messages that are relayed.

Log Messages Ignored The number of messages that are ignored.

6.5.2 show logging buffered

This command displays the message log maintained by the switch. The message log contains system trace information.

Syntax

show logging buffered

Default Setting

None

Command Mode

Privileged Exec

Display Message

Message: The message that has been logged.

Note: Message log information is not retained across a switch reset.

6.5.3 show logging traplog

This command displays the trap log maintained by the switch.
The trap log contains a maximum of 256 entries that wrap.

Syntax

show logging traplogs

Default Setting

None

Command Mode

Privileged Exec

Display Message

Number of Traps since last reset: The number of traps that have occurred since the last reset of this device.

Trap Log Capacity: The maximum number of traps that could be stored in the switch.

Log: The sequence number of this trap.

System Up Time: The relative time since the last reboot of the switch at which this trap occurred.

Trap: The relevant information of this trap.

Note: Trap log information is not retained across a switch reset.

6.5.3.1 show logging hosts

This command displays all configured logging hosts.

Syntax

show logging hosts

Default Setting

None

Command Mode

Privileged Exec

Display Message**Index (used for deleting)**

IP Address IP Address of the configured server.

Severity The minimum severity to log to the specified address.

Port Server Port Number. This is the port on the local host from which syslog messages are sent.

Status The state of logging to configured syslog hosts. If the status is disable, no logging occurs.

6.5.4 Configuration Commands

6.5.4.1 logging buffered

This command enables logging to in-memory log where up to 128 logs are kept.

Syntax
logging buffered
no logging buffered

no - This command disables logging to in-memory log.

Default Setting

None

Command Mode

Privileged Exec

This command enables wrapping of in-memory logging when full capacity reached. Otherwise when full capacity is reached, logging stops.

Syntax

logging buffered wrap
no logging buffered wrap

no - This command disables wrapping of in-memory logging when full capacity reached.

Default Setting

None

Command Mode

Privileged Exec

6.5.4.2 logging console

This command enables logging to the console.

Syntax

logging console [<severitylevel> | <0-7>]
no logging console

[<severitylevel> | <0-7>] - The value is specified as either an integer from 0 to 7 or symbolically through one of the following keywords: emergency (0), alert (1), critical (2), error (3), warning (4), notice (5), informational (6), debug (7).

no - This command disables logging to the console.

Default Setting

None

Command Mode

Privileged Exec

6.5.4.3 logging host

This command enables logging to a host where up to eight hosts can be configured.

Syntax

logging host <hostaddress> [<port>] [[<severitylevel> <0-7>]]

<hostaddress> - IP address of the log server.

<port> - Port number.

[<severitylevel> | <0-7>] - The value is specified as either an integer from 0 to 7 or symbolically through one of the following keywords: emergency (0), alert (1), critical (2), error (3), warning (4), notice (5), informational (6), debug (7).

Default Setting

None

Command Mode

Privileged Exec

This command disables logging to hosts.

Syntax

logging host remove <hostindex>
--

< hostindex > - Index of the log server.

Default Setting

None

Command Mode

Privileged Exec

This command reconfigures the IP address of the log server.

Syntax

```
logging host reconfigure <hostindex> <hostaddress>
```

< hostindex > - Index of the log server.

<hostaddress> - New IP address of the log server.

Default Setting

None

Command Mode

Privileged Exec

6.5.4.4 logging syslog

This command enables syslog logging.

Syntax

```
logging syslog  
no logging syslog
```

no - Disables syslog logging.

Default Setting

None

Command Mode

Privileged Exec

This command sets the local port number of the LOG client for logging messages.

.

Syntax

```
logging syslog port <portid>  
no logging syslog port
```

no - Resets the local logging port to the default.

Default Setting

None

Command Mode

Privileged Exec

6.5.4.5 clear logging buffered

This command clears all in-memory log.

Syntax

```
clear logging buffered
```

Default Setting

None

Command Mode

Privileged Exec

6.6 Script Management Commands**6.6.1 script apply**

This command applies the commands in the configuration script to the switch. The apply command backs up the running configuration and then starts applying the commands in the script file. Application of the commands stops at the first failure of a command.

Syntax

```
script apply <scriptname>
```

<scriptname> - The name of the script to be applied.

Default Setting

None

Command Mode

Privileged Exec

6.6.2 script delete

This command deletes a specified script or all the scripts presented in the switch.

Syntax

```
script delete {<scriptname> | all}
```

<scriptname> - The name of the script to be deleted.

all - Delete all scripts presented in the switch

Default Setting

None

Command Mode

Privileged Exec

6.6.3 script list

This command lists all scripts present on the switch as well as the total number of files present.

Syntax

script list

Default Setting

None

Command Mode

Privileged Exec

6.6.4 script show

This command displays the content of a script file.

Syntax

script show <scriptname>

<scriptname> - Name of the script file.

Default Setting

None

Command Mode

Privileged Exec

6.7 User Account Management Commands

6.7.1 Show Commands

6.7.1.1 show users

This command displays the configured user names and their settings. This command is only available for users with readwrite privileges. The SNMPv3 fields will only be displayed if SNMP is available on the system.

Syntax
show users

Default Setting

None

Command Mode

Privileged Exec

Display Message

User Name: The name the user will use to login using the serial port, Telnet or Web. A new user may be added to the switch by entering a name in a blank entry. The user name may be up to eight characters, and is not case sensitive. Two users are included as the factory default, admin, and guest.

User Access Mode: Shows whether the operator is able to change parameters on the switch (Read/Write) or is only able to view them (Read Only). As a factory default, admin has Read/Write access and guest has Read Only access. There can only be one Read/Write user and up to five Read Only users.

SNMPv3 AccessMode: This field displays the SNMPv3 Access Mode. If the value is set to **Read- Write**, the SNMPv3 user will be able to set and retrieve parameters on the system. If the value is set to **ReadOnly**, the SNMPv3 user will only be able to retrieve parameter information. The SNMPv3 access mode may be different from the CLI and Web access mode.

SNMPv3 Authentication: This field displays the authentication protocol to be used for the specified login user.

SNMPv3 Encryption: This field displays the encryption protocol to be used for the specified login user.

6.7.2 Configuration Commands

6.7.2.1 username

This command adds a new user (account) if space permits. The account <username> can be up to eight characters in length. The name may be comprised of alphanumeric characters as well as the dash ('-') and underscore ('_'). The <username> is not case-sensitive. Six user names can be defined.

This command changes the password of an existing operator. User password should not be more than eight characters in length. If a user is authorized for authentication or encryption is enabled, the password must be eight alphanumeric characters in length. The username and password are not case-sensitive. When a password is changed, a prompt will ask for the operator's former password. If none, press enter.

Syntax

```
username <username> {password | nopassword}  
no username <username>
```

<username> - is a new user name (Range: up to 8 characters).

no - This command removes a user name created before.

Note: The admin user account cannot be deleted.

nopassword - This command sets the password of an existing operator to blank. When a password is changed, a prompt will ask for the operator's former password. If none, press enter.

Default Setting

No password

Command Mode

Global Config

6.7.2.2 username snmpv3 authentication

This command specifies the authentication protocol to be used for the specified login user. The valid authentication protocols are **none**, **md5** or **sha**. If **md5** or **sha** are specified, the user login password will be used as the snmpv3 authentication password. The <username> is the login user name for which the specified authentication protocol will be used.

Syntax

```
username snmpv3 authentication <username> {none | md5 | sha}  
no username snmpv3 authentication <username>
```

<username> - is the login user name.

md5 - md5 authentication method.

sha - sha authentication method.

none - no use authentication method.

no - This command sets the authentication protocol to be used for the specified login user to **none**. The <username> is the login user name for which the specified authentication protocol will be used.

Default Setting

No authentication

Command Mode

Global Config

6.7.2.3 username snmpv3 encryption

This command specifies the encryption protocol and key to be used for the specified login user. The valid encryption protocols are **none** or **des**. The **des** protocol requires a **key**, which can be specified on the command line. The **key** may be up to 16 characters. If the **des** protocol is specified but a key is not provided, the user will be prompted to enter the key. If **none** is specified, a key must not be provided. The <username> is the login user name for which the specified encryption protocol will be used.

Syntax

username snmpv3 encryption <username> {none des [<key>]}

no username snmpv3 encryption <username>

<username> - is the login user name.

des - des encryption protocol.

none - no encryption protocol.

no - This command sets the encryption protocol to **none**. The <username> is the login user name for which the specified encryption protocol will be used.

Default Setting

No encryption

Command Mode

Global Config

6.8 Security Commands

6.8.1 Show Commands

6.8.1.1 show users authentication

This command displays all users and all authentication login information. It also displays the authentication login list assigned to the default user.

Syntax

show users authentication

Default Setting

None

Command Mode

Privileged Exec

Display Message

User: This field lists every user that has an authentication login list assigned.

System Login: This field displays the authentication login list assigned to the user for system login.

802.1x: This field displays the authentication login list assigned to the user for 802.1x port security.

6.8.1.2 show authentication

This command displays the ordered authentication methods for all authentication login lists.

Syntax

show authentication

Default Setting

None

Command Mode

Privileged Exec

Display Message

Authentication Login List: This displays the authentication login listname.

Method 1: This displays the first method in the specified authentication login list, if any.

Method 2: This displays the second method in the specified authentication login list, if any.

Method 3: This displays the third method in the specified authentication login list, if any.

6.8.1.3 show authentication users

This command displays information about the users assigned to the specified authentication login list. If the login is assigned to non-configured users, the user “default” will appear in the user column.

Syntax

show authentication users <listname>

<listname> - the authentication login listname.

Default Setting

None

Command Mode

Privileged Exec

Display Message

User Name: This field displays the user assigned to the specified authentication login list.

Component: This field displays the component (User or 802.1x) for which the authentication login list is assigned.

6.8.1.4 show dot1x

This command is used to show the status of the dot1x Administrative mode.

Syntax

show dot1x

Default Setting

None

Command Mode

Privileged Exec

Display Message

Administrative mode: Indicates whether authentication control on the switch is enabled or disabled.

6.8.1.5 show dot1x detail

This command is used to show a summary of the global dot1x configuration and the detailed dot1x configuration for a specified port.

Syntax

```
show dot1x detail <unit/slot/port>
```

<unit/slot/port> - is the desired interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Port: The interface whose configuration is displayed

Protocol Version: The protocol version associated with this port. The only possible value is 1, corresponding to the first version of the dot1x specification.

PAE Capabilities: The port access entity (PAE) functionality of this port. Possible values are Authenticator or Supplicant.

Authenticator PAE State: Current state of the authenticator PAE state machine. Possible values are Initialize, Disconnected, Connecting, Authenticating, Authenticated, Aborting, Held, ForceAuthorized, and ForceUnauthorized.

Backend Authentication State: Current state of the backend authentication state machine. Possible values are Request, Response, Success, Fail, Timeout, Idle, and Initialize.

Quiet Period: The timer used by the authenticator state machine on this port to define periods of time in which it will not attempt to acquire a supplicant. The value is expressed in seconds and will be in the range of 0 to 65535.

Transmit Period: The timer used by the authenticator state machine on the specified port to determine when to send an EAPOL EAP Request/Identity frame to the supplicant. The value is expressed in seconds and will be in the range of 1 to 65535.

Supplicant Timeout: The timer used by the authenticator state machine on this port to timeout the supplicant. The value is expressed in seconds and will be in the range of 1 to 65535.

Server Timeout: The timer used by the authenticator on this port to timeout the

authentication server. The value is expressed in seconds and will be in the range of 1 to 65535.

Maximum Requests: The maximum number of times the authenticator state machine on this port will retransmit an EAPOL EAP Request/Identity before timing out the supplicant. The value will be in the range of 1 to 10.

Reauthentication Period: The timer used by the authenticator state machine on this port to determine when reauthentication of the supplicant takes place. The value is expressed in seconds and will be in the range of 1 to 65535.

Reauthentication Enabled: Indicates if reauthentication is enabled on this port. Possible values are True or False.

Key Transmission Enabled: Indicates if the key is transmitted to the supplicant for the specified port. Possible values are True or False.

Control Direction: Indicates the control direction for the specified port or ports. Possible values are both or in.

6.8.1.6 show dot1x statistics

This command is used to show a summary of the global dot1x configuration and the dot1x statistics for a specified port.

Syntax
show dot1x statistics <unit/slot/port>

<unit/slot/port> - is the desired interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Port: The interface whose statistics are displayed.

EAPOL Frames Received: The number of valid EAPOL frames of any type that have been received by this authenticator.

EAPOL Frames Transmitted: The number of EAPOL frames of any type that have been transmitted by this authenticator.

EAPOL Start Frames Received: The number of EAPOL start frames that have been received by this authenticator.

EAPOL Logoff Frames Received: The number of EAPOL logoff frames that have been received by this authenticator.

Last EAPOL Frame Version: The protocol version number carried in the most recently received EAPOL frame.

Last EAPOL Frame Source: The source MAC address carried in the most recently received EAPOL frame.

EAP Response/Id Frames Received: The number of EAP response/identity frames that have been received by this authenticator.

EAP Response Frames Received: The number of valid EAP response frames (other than resp/id frames) that have been received by this authenticator.

EAP Request/Id Frames Transmitted: The number of EAP request/identity frames that have been transmitted by this authenticator.

EAP Request Frames Transmitted: The number of EAP request frames (other than request/identity frames) that have been transmitted by this authenticator.

Invalid EAPOL Frames Received: The number of EAPOL frames that have been received by this authenticator in which the frame type is not recognized.

EAP Length Error Frames Received: The number of EAPOL frames that have been received by this authenticator in which the frame type is not recognized.

6.8.1.7 show dot1x summary

This command is used to show a summary of the global dot1x configuration and summary information of the dot1x configuration for a specified port or all ports.

Syntax

show dot1x summary {<unit/slot/port> all}
--

<unit/slot/port> - is the desired interface number.

all - All interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: The interface whose configuration is displayed.

Control Mode: The configured control mode for this port. Possible values are force-unauthorized / force-authorized / auto.

Operating Control Mode: The control mode under which this port is operating. Possible values are authorized / unauthorized.

Reauthentication Enabled: Indicates whether re-authentication is enabled on this port.

Port Status: Indicates if the key is transmitted to the supplicant for the specified port.

6.8.1.8 show dot1x users

This command displays 802.1x port security user information for locally configured users.

Syntax

show dot1x users <unit/slot/port>
--

<unit/slot/port> - is the desired interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message

User: Users configured locally to have access to the specified port.

6.8.1.9 show radius-servers

This command is used to display items of the configured RADIUS servers.

Syntax

show radius-servers

Default Setting

None

Command Mode

Privileged Exec

Display Message

IP Address: IP Address of the configured RADIUS server

Port: The port in use by this server

Type: Primary or secondary

Secret Configured: Yes / No

Message Authenticator: The message authenticator attribute configured for the radius server.

6.8.1.10 show radius

This command is used to display the various RADIUS configuration items for the switch.

Syntax

show radius

Default Setting

None

Command Mode

Privileged Exec

Display Message

Current Server IP Address: Indicates the configured server currently in use for authentication

Number of configured servers: The configured IP address of the authentication server

Number of retransmits: The configured value of the maximum number of times a request packet is retransmitted

Timeout Duration: The configured timeout value, in seconds, for request re-transmissions

RADIUS Accounting Mode: Disable or Enabled

6.8.1.11 show radius accounting

This command is used to display the configured RADIUS accounting mode, accounting server, and the statistics for the configured accounting server.

Syntax

show radius accounting [statistics <ipaddr>]

<ipaddr> - is an IP Address.

Default Setting

None

Command Mode

Privileged Exec

Display Message

If the optional token 'statistics <ipaddr>' is not included, then only the accounting mode and the RADIUS accounting server details are displayed.

RADIUS Accounting Mode: Enabled or disabled

IP Address: The configured IP address of the RADIUS accounting server

Port: The port in use by the RADIUS accounting server

Secret Configured: Yes or No

If the optional token 'statistics <ipaddr>' is included, the statistics for the configured RADIUS accounting server are displayed. The IP address parameter must match that of a previously configured RADIUS accounting server. The following information regarding the statistics of the RADIUS accounting server is displayed.

RADIUS Accounting Server IP Address: IP Address of the configured RADIUS accounting server

Round Trip Time: The time interval in centiseconds, between the most recent Accounting-Response and the Accounting-Request that matched it from the RADIUS accounting server.

Requests: The number of RADIUS Accounting-Request packets sent to this accounting server. This number does not include retransmissions.

Retransmission: The number of RADIUS Accounting-Request packets retransmitted to this RADIUS accounting server.

Responses: The number of RADIUS packets received on the accounting port from this server.

Malformed Responses: The number of malformed RADIUS Accounting-Response packets received from this server. Malformed packets include packets with an invalid length. Bad authenticators and unknown types are not included as malformed accounting responses.

Bad Authenticators: The number of RADIUS Accounting-Response packets containing invalid authenticators received from this accounting server.

Pending Requests: The number of RADIUS Accounting-Request packets sent to this server that have not yet timed out or received a response.

Timeouts: The number of accounting timeouts to this server.

Unknown Types: The number of RADIUS packets of unknown types, which were received from this server on the accounting port.

Packets Dropped: The number of RADIUS packets received from this server on the accounting port and dropped for some other reason.

6.8.1.12 show radius statistics

This command is used to display the statistics for RADIUS or configured server. To show the configured RADIUS server statistic, the IP Address specified must match that of a previously configured RADIUS server. On execution, the following fields are displayed.

Syntax
show radius statistics [<ipaddr>]

<ipaddr> - is an IP Address.

Default Setting

None

Command Mode

Privileged Exec

Display Message

If an IP address is not specified then only the Invalid Server Addresses field is displayed. Otherwise, the other listed fields are displayed.

Invalid Server Addresses: The number of RADIUS Access-Response packets received from unknown addresses.

Server IP Address: The IP address of radius server.

Round Trip Time: The time interval, in hundredths of a second, between the most recent Access-Reply/ Access-Challenge and the Access-Request that matched it from the RADIUS authentication server.

Access Requests: The number of RADIUS Access-Request packets sent to this server. This number does not include retransmissions.

Access Retransmission: The number of RADIUS Access-Request packets retransmitted to this RADIUS authentication server.

Access Accepts: The number of RADIUS Access-Accept packets, including both valid and invalid packets, which were received from this server.

Access Rejects: The number of RADIUS Access-Reject packets, including both valid and invalid packets, which were received from this server.

Access Challenges: The number of RADIUS Access-Challenge packets, including both valid and invalid packets, which were received from this server.

Malformed Access Responses: The number of malformed RADIUS Access-Response packets received from this server. Malformed packets include packets with an invalid length. Bad authenticators or signature attributes or unknown types are not included as malformed access responses.

Bad Authenticators: The number of RADIUS Access-Response packets containing invalid authenticators or signature attributes received from this server.

Pending Requests: The number of RADIUS Access-Request packets destined for this server that have not yet timed out or received a response.

Timeouts: The number of authentication timeouts to this server.

Unknown Types: The number of RADIUS packets of unknown types, which were received from this server on the authentication port.

Packets Dropped: The number of RADIUS packets received from this server on the authentication port and dropped for some other reason.

6.8.1.13 show tacacs

This command display configured information of the TACACS.

Syntax

```
show tacacs
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Admin Mode: Displays TACACS administration mode.

Server 1 Port: TACACS packet port number

Server 1 Key: Secret Key between TACACS server and client

Server 1 IP: First TACACS Server IP address

Server 1 Timeout (sec): Timeout value in seconds while TACACS server has no response

Server 1 Retry: Retry count if TACACS server has no response

Server 1 Mode: Current TACACS server admin mode (disable, master or slave)

Server 2 Port: TACACS packet port number

Server 2 Key: Secret Key between TACACS server and client

Server 2 IP: Second TACACS Server IP address

Server 2 Timeout (sec): Timeout value in seconds while TACACS server has no response

Server 2 Retry: Retry count if TACACS server has no response

Server 2 Mode: Current TACACS server admin mode (disable, master or slave)

Server 3 Port: TACACS packet port number

Server 3 Key: Secret Key between TACACS server and client

Server 3 IP: Third TACACS Server IP address

Server 3 Timeout (sec): Timeout value in seconds while TACACS server has no response

Server 3 Retry: Retry count if TACACS server has no response

Server 3 Mode: Current TACACS server admin mode (disable, master or slave)

6.8.1.14 show port-security

This command shows the port-security settings for the entire system.

Syntax

```
show port-security
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Port Security Administration Mode: Port lock mode for the entire system.

This command shows the port-security settings for a particular interface or all interfaces.

Syntax

```
show port-security { <unit/slot/port> | all }
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Intf Interface Number.

Interface Admin Mode Port Locking mode for the Interface.

Dynamic Limit Maximum dynamically allocated MAC Addresses.

Static Limit Maximum statically allocated MAC Addresses.

Violation Trap Mode Whether violation traps are enabled.

This command shows the dynamically locked MAC addresses for port.

Syntax

```
show port-security dynamic <unit/slot/port>
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

MAC address Dynamically locked MAC address.

This command shows the statically locked MAC addresses for port.

Syntax

```
show port-security static <unit/slot/port>
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

MAC address Statically locked MAC address.

This command displays the source MAC address of the last packet that was discarded on a locked port.

Syntax

```
show port-security violation <unit/slot/port>
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

MAC address MAC address of discarded packet on locked ports.

6.8.2 Configuration Commands

6.8.2.1 authentication login

This command creates an authentication login list. The **<listname>** is up to 15 alphanumeric characters and is not case sensitive. Up to 10 authentication login lists can be configured on the switch. When a list is created, the authentication method “local” is set as the first method.

When the optional parameters “method1”, “method 2”, and/or “method 3” are used, an ordered list of methods are set in the authentication login list. If the authentication login list does not exist, a new authentication login list is first created and then the authentication methods are set in the authentication login list. The maximum number of authentication login methods is three. **The possible method values are local, radius, reject, and tacacs.**

The value of **local** indicates that the user’s locally stored ID and password are used for authentication. The value of **radius** indicates that the user’s ID and password will be authenticated using the RADIUS server. The value of **reject** indicates that the user is never authenticated. The value of **tacacs** indicates that the user’s ID and password will be authenticated using the TACACS.

To authenticate a user, the authentication methods in the user’s login will be attempted in order until an authentication attempt succeeds or fails.

Note that the default login list included with the default configuration cannot be changed.

Syntax

authentication login <listname> [<method1>] [<method2>] [<method3>] no authentication login <listname>

<listname> - creates an authentication login list (Range: up to 15 characters).

<method1 - 3> - The possible method values are local, radius, reject, and tacacs.

no - This command deletes the specified authentication login list. The attempt to delete will fail if any of the following conditions are true:

1. The login list name is invalid or does not match an existing authentication login list
2. The specified authentication login list is assigned to any user or to the nonconfigured user for any component.
3. The login list is the default login list included with the default configuration and was not created using ‘config authentication login create’. The default login list cannot be deleted.

Default Setting

None

Command Mode

Global Config

6.8.2.2 username defaultlogin

This command assigns the authentication login list to use for non-configured users when attempting to log in to the system. This setting is overridden by the authentication login list assigned to a specific user if the user is configured locally. If this value is not configured, users will be authenticated using local authentication only.

Syntax**username defaultlogin <listname>**

<listname> - an authentication login list.

Default Setting

None

Command Mode

Global Config

6.8.2.3 username login

This command assigns the specified authentication login list to the specified user for system login. The **<username>** must be a configured **<username>** and the **<listname>** must be a configured login list.

If the user is assigned a login list that requires remote authentication, all access to the interface from all CLI, web, and telnet sessions will be blocked until the authentication is complete.

Note that the login list associated with the 'admin' user cannot be changed to prevent accidental lockout from the switch.

Syntax**username login <user> <listname>**

<user> - is the login user name.

<listname> - an authentication login list.

Default Setting

None

Command Mode

Global Config

6.8.3 Dot1x Configuration Commands

6.8.3.1 dot1x initialize

This command begins the initialization sequence on the specified port. This command is only valid if the control mode for the specified port is 'auto'. If the control mode is not 'auto' an error will be returned.

Syntax

dot1x initialize <unit/slot/port>
--

<unit/slot/port> - is the desired interface number.

Default Setting

None

Command Mode

Privileged Exec

6.8.3.2 dot1x default-login

This command assigns the authentication login list to use for non-configured users for 802.1x port security. This setting is over-ridden by the authentication login list assigned to a specific user if the user is configured locally. If this value is not configured, users will be authenticated using local authentication only.

Syntax

dot1x defaultl-login <listname>
--

<listname> - an authentication login list.

Default Setting

None

Command Mode

Global Config

6.8.3.3 dot1x login

This command assigns the specified authentication login list to the specified user for 802.1x port security. The <user> parameter must be a configured user and the <listname> parameter must be a configured authentication login list.

Syntax

dot1x login <user> <listname>
--

<user> - is the login user name.

<listname> - an authentication login list.

Default Setting

None

Command Mode

Global Config

6.8.3.4 dot1x system-auth-control

This command is used to enable the dot1x authentication support on the switch. By default, the authentication support is disabled. While disabled, the dot1x configuration is retained and can be changed, but is not activated.

Syntax

```
dot1x system-auth-control  
no dot1x system-auth-control
```

no - This command is used to disable the dot1x authentication support on the switch.

Default Setting

Disabled

Command Mode

Global Config

6.8.3.5 dot1x user

This command adds the specified user to the list of users with access to the specified port or all ports. The <username> parameter must be a configured user.

Syntax

```
dot1x user <user> {<unit/slot/port> | all}  
no dot1x user <user> {<unit/slot/port> | all}
```

<user> - Is the login user name.

<unit/slot/port> - Is the desired interface number.

all - All interfaces.

no - This command removes the user from the list of users with access to the specified port or all ports.

Default Setting

None

Command Mode

Global Config

6.8.3.6 dot1x port-control

This command sets the authentication mode to be used on all ports. The control mode may be one of the following.

force-unauthorized: The authenticator PAE unconditionally sets the controlled port to unauthorized.

force-authorized: The authenticator PAE unconditionally sets the controlled port to authorized.

auto: The authenticator PAE sets the controlled port mode to reflect the outcome of the authentication exchanges between the supplicant, authenticator, and the authentication server.

Syntax

```
dot1x port-control all {auto | force-authorized | force-unauthorized}  
no dot1x port-control all
```

all - All interfaces.

no - This command sets the authentication mode to be used on all ports to 'auto'.

Default Setting

auto

Command Mode

Global Config

This command sets the authentication mode to be used on the specified port. The control mode may be one of the following.

force-unauthorized: The authenticator PAE unconditionally sets the controlled port to unauthorized.

force-authorized: The authenticator PAE unconditionally sets the controlled port to authorized.

auto: The authenticator PAE sets the controlled port mode to reflect the outcome of the authentication exchanges between the supplicant, authenticator, and the authentication server.

Syntax

```
dot1x port-control {auto | force-authorized | force-unauthorized}  
no dot1x port-control
```

no - This command sets the authentication mode to be used on the specified port to 'auto'.

Default Setting

auto

Command Mode

Interface Config

6.8.3.7 dot1x max-req

This command sets the maximum number of times the authenticator state machine on this port will transmit an EAPOL EAP Request/Identity frame before timing out the supplicant. The <1-10> value must be in the range 1 - 10.

Syntax
dot1x max-req <1-10> no dot1x max-req

<1-10> - maximum number of times (Range: 1 – 10).

no - This command sets the maximum number of times the authenticator state machine on this port will transmit an EAPOL EAP Request/Identity frame before timing out the supplicant to the default value, that is, 2.

Default Setting

2

Command Mode

Interface Config

6.8.3.8 dot1x re-authentication

This command enables re-authentication of the supplicant for the specified port.

Syntax
dot1x re-authentication no dot1x re-authentication

no - This command disables re-authentication of the supplicant for the specified port.

Default Setting

Disabled

Command Mode

Interface Config

6.8.3.9 dot1x re-authenticate

This command begins the re-authentication sequence on the specified port. This command is only valid if the control mode for the specified port is 'auto'. If the control mode is not 'auto' an error will be returned.

Syntax**dot1x re-authenticate <unit/slot/port>**

<unit/slot/port> - is the desired interface number.

Default Setting

None

Command Mode

Privileged Exec

6.8.3.10 dot1x timeout

This command sets the value, in seconds, of the timer used by the authenticator state machine on this port. Depending on the token used and the value (in seconds) passed; various timeout configurable parameters are set. The following tokens are supported.

reauth-period: Sets the value, in seconds, of the timer used by the authenticator state machine on this port to determine when re-authentication of the supplicant takes place. The reauth-period must be a value in the range 1 - 65535.

quiet-period: Sets the value, in seconds, of the timer used by the authenticator state machine on this port to define periods of time in which it will not attempt to acquire a supplicant. The quiet-period must be a value in the range 0 - 65535.

tx-period: Sets the value, in seconds, of the timer used by the authenticator state machine on this port to determine when to send an EAPOL EAP Request/Identity frame to the supplicant. The quiet-period must be a value in the range 1 - 65535.

supp-timeout: Sets the value, in seconds, of the timer used by the authenticator state machine on this port to timeout the supplicant. The supp-timeout must be a value in the range 1 - 65535.

server-timeout: Sets the value, in seconds, of the timer used by the authenticator state machine on this port to timeout the authentication server. The supp-timeout must be a value in the range 1 - 65535.

Syntax
dot1x timeout {quiet-period reauth-period server-timeout supp-timeout tx-period} <seconds> no dot1x timeout {quiet-period reauth-period server-timeout supp-timeout tx-period}

<seconds> - Value in the range 0 – 65535.

no - This command sets the value, in seconds, of the timer used by the authenticator state machine on this port to the default values. Depending on the token used, the corresponding default values are set.

Default Setting

reauth-period: 3600 seconds
quiet-period: 60 seconds
tx-period: 30 seconds
supp-timeout: 30 seconds
server-timeout: 30 seconds

Command Mode

Interface Config

6.8.4 Radius Configuration Commands

6.8.4.1 radius accounting mode

This command is used to enable the RADIUS accounting function.

Syntax

```
radius accounting mode  
no radius accounting mode
```

no - This command is used to set the RADIUS accounting function to the default value - that is, the RADIUS accounting function is disabled.

Default Setting

Disabled

Command Mode

Global Config

6.8.4.2 radius-server host

This command is used to configure the RADIUS authentication and accounting server. If the **'auth'** token is used, the command configures the IP address to use to connect to a RADIUS authentication server. Up to 3 servers can be configured per RADIUS client. If the maximum number of configured servers is reached, the command will fail until one of the servers is removed by executing the **no** form of the command. If the optional **<port>** parameter is used, the command will configure the UDP port number to use to connect to the configured RADIUS server. In order to configure the UDP port number, the IP address must match that of a previously configured RADIUS authentication server. The port number must lie between 1 - 65535, with 1812 being the default value.

If the **'acct'** token is used, the command configures the IP address to use for the RADIUS accounting server. Only a single accounting server can be configured. If an accounting server is currently configured, it must be removed from the configuration using the **no** form of the command before this command succeeds. If the optional **<port>** parameter is used, the command will configure the UDP port to use to connect to the RADIUS accounting server. The IP address specified must match that of a previously configured accounting server. If a port is already configured for the accounting server then the new port will replace the previously configured value. The port must be a value in the range 1 - 65535, with 1813 being the default value.

Syntax

```
radius-server host {acct | auth} <ipaddr> [port]  
no radius-server host {acct | auth} <ipaddr>
```

<ipaddr> - is a IP address.

[port] - Port number (Range: 1 – 65535)

no - This command is used to remove the configured RADIUS authentication server or the RADIUS accounting server. If the 'auth' token is used, the previously configured RADIUS authentication server is removed from the configuration. Similarly, if the 'acct' token is used, the previously configured RADIUS accounting server is removed from the configuration. The <ipaddr> parameter must match the IP address of the previously configured RADIUS authentication / accounting server.

Default Setting

None

Command Mode

Global Config

6.8.4.3 radius-sever key

This command is used to configure the shared secret between the RADIUS client and the RADIUS accounting / authentication server. Depending on whether the '**auth**' or '**acct**' token is used, the shared secret will be configured for the RADIUS authentication or RADIUS accounting server. The IP address provided must match a previously configured server. When this command is executed, the secret will be prompted. The secret must be an alphanumeric value not exceeding 20 characters.

Syntax

radius-server key {acct auth} <ipaddr>

<ipaddr> - is a IP address.

Default Setting

None

Command Mode

Global Config

6.8.4.4 radius-server retransmit

This command sets the maximum number of times a request packet is re-transmitted when no

response is received from the RADIUS server. The retries value is an integer in the range of 1 to 15.

Syntax**radius-server retransmit <retries>****no radius-server retransmit**

<retries> - the maximum number of times (Range: 1 - 15).

no - This command sets the maximum number of times a request packet is re-transmitted, when no response is received from the RADIUS server, to the default value, that is, 10.

Default Setting

10

Command Mode

Global Config

6.8.4.5 radius-server timeout

This command sets the timeout value (in seconds) after which a request must be retransmitted to the RADIUS server if no response is received. The timeout value is an integer in the range of 1 to 30.

Syntax**radius-server timeout <seconds>****no radius-server timeout**

<seconds> - the maximum timeout (Range: 1 - 30).

no - This command sets the timeout value (in seconds) after which a request must be retransmitted to the RADIUS server if no response is received, to the default value, that is, 6.

Default Setting

6

Command Mode

Global Config

6.8.4.6 radius-server msgauth

This command enables the message authenticator attribute for a specified server.

Syntax

radius-server msgauth <ipaddr>

<ipaddr> - is a IP address.

Default Setting

None

Command Mode

Global Config

6.8.4.7 radius-server primary

This command is used to configure the primary RADIUS authentication server for this RADIUS client. The primary server is the one that is used by default for handling RADIUS requests. The remaining configured servers are only used if the primary server cannot be reached. A maximum of three servers can be configured on each client. Only one of these servers can be configured as the primary. If a primary server is already configured prior to this command being executed, the server specified by the IP address specified used in this command will become the new primary server. The IP address must match that of a previously configured RADIUS authentication server.

Syntax

radius-server primary <ipaddr>

<ipaddr> - is a IP address.

Default Setting

None

Command Mode

Global Config

6.8.5 TACACS Configuration Commands

6.8.5.1 tacacs

This command is used to enable /disable the TACACS function.

Syntax
tacacs no tacacs

no - This command is used to disable the TACACS function.

Default Setting

Disabled

Command Mode

Global Config

6.8.5.2 tacacs mode

This command is used to enable/select/disable the TACACS server administrative mode

Syntax
tacacs mode <1-3> {master slave} no tacacs mode <1-3>

<1-3> - The valid value of index is 1, 2, and 3.

no - This command is used to disable it.

Default Setting

Disabled

Command Mode

Global Config

6.8.5.3 tacacs server-ip

This command is used to configure the TACACS server IP address.

Syntax

```
tacacs server-ip <1-3> <ipaddr>  
no tacacs server-ip <1-3>
```

<ipaddr> - An IP address.

<1-3> - The valid value of index is 1, 2, and 3.

no - This command is used to remove the TACACS server IP address.

Default Setting

IP 0.0.0.0

Command Mode

Global Config

6.8.5.4 tacacs port

This command is used to configure the TACACS server's service port.

Syntax

```
tacacs port <1-3> <1-65535>  
no tacacs port <1-3>
```

<1-65535> - service port (Range: 1 to 65535).

<1-3> - The valid value of index is 1, 2, and 3.

no - This command is used to reset port-id to the default value.

Default Setting

49

Command Mode

Global Config

6.8.5.5 tacacs key

This command is used to configure the TACACS server shared secret key.

Syntax

```
tacacs key <1-3>  
no tacacs key <1-3>
```

Note that the length of the secret key is up to 32 characters.

<1-3> - The valid value of index is 1, 2, and 3.

no - This command is used to remove the TACACS server secret key.

Default Setting

None

Command Mode

Global Config

6.8.5.6 tacacs retry

This command is used to configure the TACACS packet retransmit times.

Syntax

```
tacacs retry <1-3> <1-9>  
no tacacs retry <1-3>
```

<1-9> - retry times (Range: 1 to 9).

<1-3> - The valid value of index is 1, 2, and 3.

no - This command is used to reset retry value to the default value.

Default Setting

5

Command Mode

Global Config

6.8.5.7 tacacs timeout

This command is used to configure the TACACS request timeout of an instance.

Syntax

tacacs timeout <1-3> <1-255>

no tacacs timeout <1-3>

<1-255> - max timeout (Range: 1 to 255).

<1-3> - The valid value of index is 1, 2, and 3.

no - This command is used to reset the timeout value to the default value.

Default Setting

3

Command Mode

Global Config

6.8.6 Port Security Configuration Commands

6.8.6.1 port-security

This command enables port locking at the system level (Global Config) or port level (Interface Config).

Syntax

port-security no port-security

Default Setting

None

Command Mode

Global Config, Interface Config

6.8.6.2 port-security max-dynamic

This command sets the maximum of dynamically locked MAC addresses allowed on a specific port.

Syntax

port-security max-dynamic [<0-600>] no port-security max-dynamic

no - This command resets the maximum of dynamically locked MAC addresses allowed on a specific port to its default value.

Default Setting

600

Command Mode

Interface Config

6.8.6.3 port-security max-static

This command sets the maximum number of statically locked MAC addresses allowed on a specific port.

Syntax**port-security max-static [<0-20>]****no port-security max-static**

no - This command resets the maximum number of statically locked MAC addresses allowed on a specific port to its default value.

Default Setting

20

Command Mode

Interface Config

6.8.6.4 port-security mac-address

This command adds a MAC address to the list of statically locked MAC addresses.

Syntax**port-security mac-address <mac-addr> <1-3965>****no port-security mac-address <mac-addr> <1-3965>****<1-3965> VLAN ID****<mac-addr>**

no - This command removes a MAC address from the list of statically locked MAC addresses.

Default Setting

None

Command Mode

Interface Config

6.8.6.5 port-security mac-address move

This command converts dynamically locked MAC addresses to statically locked addresses.

Syntax

port-security mac-address move

Default Setting

None

Command Mode

Interface Config

6.9 CDP (Cisco Discovery Protocol) Commands

6.9.1 Show Commands

6.9.1.1 show cdp

This command displays the CDP configuration information.

Syntax

show cdp

Default Setting

None

Command Mode

Privileged Exec

Display Message

CDP Admin Mode: CDP enable or disable

CDP Holdtime (sec): The length of time a receiving device should hold the L2 Network Switch CDP information before discarding it

CDP Transmit Interval (sec): A period of the L2 Network Switch to send CDP packet

Ports: Port number vs CDP status

CDP: CDP enable or disable

6.9.1.2 show cdp neighbors

This command displays the CDP neighbor information.

Syntax

show cdp neighbors

Default Setting

None

Command Mode

Privileged Exec

Display Message

Device Id: Identifies the device name in the form of a character string.

Local Interface: The CDP neighbor information receiving port.

Holdtime: The length of time a receiving device should hold CDP information before discarding it.

Capability: Describes the device's functional capability in the form of a device type, for example, a switch.

Platform: Describes the hardware platform name of the device, for example, Korenix the L2 Network Switch.

Port Id: Identifies the port on which the CDP packet is sent.

6.9.1.3 show cdp traffic

This command displays the CDP traffic counters information.

Syntax

show cdp traffic

Default Setting

None

Command Mode

Privileged Exec

Display Message

Incoming packet number: Received legal CDP packets number from neighbors.

Outgoing packet number: Transmitted CDP packets number from this device.

Error packet number: Received illegal CDP packets number from neighbors.

6.9.2 Configuration Commands

6.9.2.1 cdp

This command is used to enable CDP Admin Mode.

Syntax

cdp no cdp

no - This command is used to disable CDP Admin Mode.

Default Setting

Enabled

Command Mode

Global Config

6.9.2.2 cdp run

This command is used to enable CDP on a specified interface.

Syntax

cdp run no cdp run

no - This command is used to disable CDP on a specified interface.

Default Setting

Enabled

Command Mode

Interface Config

This command is used to enable CDP for all interfaces.

Syntax

cdp run all no cdp run all

all - All interfaces.

no - This command is used to disable CDP for all interfaces.

Default Setting

Enabled

Command Mode

Global Config

6.9.2.3 cdp timer

This command is used to configure an interval time (seconds) of the sending CDP packet.

Syntax

```
cdp timer <5-254>
no cdp timer
```

<5-254> - interval time (Range: 5 – 254).

no - This command is used to reset the interval time to the default value.

Default Setting

60

Command Mode

Global Config

6.9.2.4 cdp holdtime

This command is used to configure the hold time (seconds) of CDP.

Syntax

```
cdp holdtime <10-255>
```

<10-255> - interval time (Range: 10 – 255).

no - This command is used to hold time to the default value.

Default Setting

180

Command Mode

Global Config

6.10 SNTP (Simple Network Time Protocol) Commands

6.10.1 Show Commands

6.10.1.1 show sntp

This command displays the current time and configuration settings for the SNTP client, and indicates whether the local time has been properly updated.

Syntax

show sntp

Default Setting

None

Command Mode

Privileged Exec

Display Message

Last Update Time Time of last clock update.

Last Unicast Attempt Time Time of last transmit query (in unicast mode).

Last Attempt Status Status of the last SNTP request (in unicast mode) or unsolicited message (in broadcast mode).

Broadcast Count Current number of unsolicited broadcast messages that have been received and processed by the SNTP client since last reboot.

Time Zone Time zone configured.

This command displays SNTP client settings.

Syntax

show sntp client

Default Setting

None

Command Mode

Privileged Exec

Display Message

Client Supported Modes Supported SNTP Modes (Broadcast, Unicast, or Multicast).

SNTP Version The highest SNTP version the client supports.

Port SNTP Client Port

Client Mode: Configured SNTP Client Mode.

Unicast Poll Interval Poll interval value for SNTP clients in seconds as a power of two.

Poll Timeout (Seconds) Poll timeout value in seconds for SNTP clients.

Poll Retry Poll retry value for SNTP clients.

This command displays configured SNTP servers and SNTP server settings.

Syntax
show sntp server

Default Setting

None

Command Mode

Privileged Exec

Display Message

Server IP Address IP Address of configured SNTP Server

Server Type Address Type of Server.

Server Stratum Claimed stratum of the server for the last received valid packet.

Server Reference ID Reference clock identifier of the server for the last received valid packet.

Server Mode SNTP Server mode.

Server Max Entries Total number of SNTP Servers allowed.

Server Current Entries Total number of SNTP configured.

For each configured server:

IP Address IP Address of configured SNTP Server.

Address Type Address Type of configured SNTP server.

Priority IP priority type of the configured server.

Version SNTP Version number of the server. The protocol version used to query the server in unicast mode.

Port Server Port Number

Last Attempt Time Last server attempt time for the specified server.

Last Update Status Last server attempt status for the server.

Total Unicast Requests Number of requests to the server.

Failed Unicast Requests Number of failed requests from server.

6.10.2 Configuration Commands

6.10.2.1 sntp broadcast client poll-interval

This command will set the poll interval for SNTP broadcast clients in seconds as a power of two

where <poll-interval> can be a value from 6 to 16.

Syntax

```
ntp broadcast client poll-interval <6-10>
no ntp broadcast client poll-interval
```

<6-10> - The range is 6 to 16.

no - This command will reset the poll interval for SNTP broadcast client back to its default value.

Default Setting

6

Command Mode

Global Config

6.10.2.2 sntp client mode

This command will enable Simple Network Time Protocol (SNTP) client mode and optionally setting the mode to either broadcast, multicast, or unicast.

Syntax

```
sntp client mode [broadcast | unicast]
no sntp client mode
```

no - This command will disable Simple Network Time Protocol (SNTP) client mode.

Default Setting

None

Command Mode

Global Config

6.10.2.3 sntp client port

This command will set the SNTP client port id and polling interval in seconds.

Syntax

sntp client port <portid> [<6-10>] no sntp client port

<portid> - SNTP client port id.

<6-10> - Polling interval. It's 2^(value) seconds where value is 6 to 10.

no - Resets the SNTP client port id.

Default Setting

The default portid is 123.

Command Mode

Global Config

6.10.2.4 sntp unicast client poll-interval

This command will set the poll interval for SNTP unicast clients in seconds.

Syntax

sntp unicast client poll-interval <6-10> no sntp unicast client poll-interval
--

<6-10> - Polling interval. It's 2^(value) seconds where value is 6 to 10.

no - This command will reset the poll interval for SNTP unicast clients to its default value.

Default Setting

The default value is 6.

Command Mode

Global Config

6.10.2.5 sntp unicast client poll-timeout

This command will set the poll timeout for SNTP unicast clients in seconds.

Syntax

```
sntp unicast client poll-timeout <poll-timeout>  
no sntp unicast client poll-timeout
```

< poll-timeout > - Polling timeout in seconds. The range is 1 to 30.

no - This command will reset the poll timeout for SNTP unicast clients to its default value.

Default Setting

The default value is 5.

Command Mode

Global Config

6.10.2.6 sntp unicast client poll-retry

This command will set the poll retry for SNTP unicast clients in seconds.

Syntax

```
sntp unicast client poll-retry <poll-retry>  
no sntp unicast client poll-retry
```

< poll-retry> - Polling retry in seconds. The range is 0 to 10.

no - This command will reset the poll retry for SNTP unicast clients to its default value.

Default Setting

The default value is 1.

Command Mode

Global Config

6.10.2.7 sntp server

This command configures an SNTP server (with a maximum of three) where the server address can be an ip address or a domain name and the address type either ipv4 or dns. The optional priority can be a value of 1-3, the version is a value of 1-4, and the port id is a value of 1-65535.

Syntax

<pre>sntp server <ipaddress/domain-name> <addresstype> [<1-3> [<version> [<portid>]]] no sntp server remove <ipaddress/domain-name></pre>

< ipaddress/domain-name > - IP address of the SNTP server.

< addresstype > - The address type is ipv4 or dns.

<1-3> - The range is 1 to 3.

<version> - The range is 1 to 4.

<portid> - The range is 1 to 65535.

no - This command deletes an server from the configured SNTP servers.

Default Setting

None.

Command Mode

Global Config

6.10.2.8 sntp clock timezone

This command sets the time zone for the switch's internal clock.

Syntax

```
sntp clock timezone <name> <0-12> <0-59> {before-utc | after-utc}
```

<name> - Name of the time zone, usually an acronym. (Range: 1-15 characters)

<0-12> - Number of hours before/after UTC. (Range: 0-12 hours)

<0-59> - Number of minutes before/after UTC. (Range: 0-59 minutes)

before-utc - Sets the local time zone before (east) of UTC.

after-utc - Sets the local time zone after (west) of UTC.

Default Setting

Taipei 08:00 After UTC

Command Mode

Global Config

6.11 System Utilities

6.11.1 clear

6.11.1.1 clear arp

This command causes all ARP entries of type dynamic to be removed from the ARP cache.

Syntax

```
clear arp
```

Default Setting

None

Command Mode

Privileged Exec

6.11.1.2 clear traplog

This command clears the trap log.

Syntax

clear traplog

Default Setting

None

Command Mode

Privileged Exec

6.11.1.3 clear eventlog

This command is used to clear the event log, which contains error messages from the system.

Syntax

clear eventlog

Default Setting

None

Command Mode

Privileged Exec

6.11.1.4 clear logging buffered

This command is used to clear the message log maintained by the switch. The message log contains system trace information.

Syntax

```
clear logging buffered
```

Default Setting

None

Command Mode

Privileged Exec

6.11.1.5 clear config

This command resets the configuration to the factory defaults without powering off the switch. The switch is automatically reset when this command is processed. You are prompted to confirm that the reset should proceed.

Syntax

```
clear config
```

Default Setting

None

Command Mode

Privileged Exec

6.11.1.6 clear pass

This command resets all user passwords to the factory defaults without powering off the switch. You are prompted to confirm that the password reset should proceed.

Syntax

```
clear pass
```

Default Setting

None

Command Mode

Privileged Exec

6.11.1.7 clear counters

This command clears the stats for a specified <unit/slot/port> or for all the ports or for the entire switch based upon the argument.

Syntax

```
clear counters [<unit/slot/port> | all]
```

<unit/slot/port> - is the desired interface number.

all - All interfaces.

Default Setting

None

Command Mode

Privileged Exec

6.11.1.8 clear dns counter

This command clears the DNS statistics.

Syntax

```
clear dns counter
```

Default Setting

None

Command Mode

Privileged Exec

6.11.1.9 clear dns cache

This command clears all entries from the DNS cache.

Syntax

clear dns cache

Default Setting

None

Command Mode

Privileged Exec

6.11.1.10 clear cdp

This command is used to clear the CDP neighbors information and the CDP packet counters.

Syntax

clear cdp [traffic]

traffic - this command is used to clear the CDP packet counters.

Default Setting

None

Command Mode

Privileged Exec

6.11.1.11 clear vlan

This command resets VLAN configuration parameters to the factory defaults.

Syntax

```
clear vlan
```

Default Setting

None

Command Mode

Privileged Exec

6.11.1.12 enable passwd

This command changes Privileged EXEC password.

Syntax

```
enable passwd
```

Default Setting

None

Command Mode

Global Config.

6.11.1.13 clear igmp snooping

This command clears the tables managed by the IGMP Snooping function and will attempt to delete these entries from the Multicast Forwarding Database.

Syntax

```
clear igmp snooping
```

Default Setting

None

Command Mode

Privileged Exec

6.11.1.14 clear port-channel

This command clears all port-channels (LAGs).

Syntax

clear port-channel

Default Setting

None

Command Mode

Privileged Exec

6.11.1.15 clear ip filter

This command is used to clear all ip filter entries.

Syntax

clear ip filter

Default Setting

None

Command Mode

Privileged Exec

6.11.1.16 clear dot1x statistics

This command resets the 802.1x statistics for the specified port or for all ports.

Syntax

```
clear dot1x statistics {all | <unit/slot/port>}
```

<unit/slot/port> - is the desired interface number.

all - All interfaces.

Default Setting

None

Command Mode

Privileged Exec

6.11.1.17 clear radius statistics

This command is used to clear all RADIUS statistics.

Syntax

```
clear radius statistics
```

Default Setting

None

Command Mode

Privileged Exec

6.11.1.18 clear tacacs

This command is used to clear TACACS configuration.

Syntax

```
clear tacacs
```

Default Setting

None

Command Mode

Privileged Exec

6.11.2 copy

This command uploads and downloads to/from the switch. Local URLs can be specified using tftp or xmodem. The following can be specified as the source file for uploading from the switch: startup config (startup-config), event log (eventlog), message log (msglog) and trap log (traplog). A URL is specified for the destination.

The command can also be used to download the startup config or code image by specifying the source as a URL and destination as startup-config or image respectively.

The command can be used to save the running config to flash by specifying the source as running-config and the destination as startup-config {*filename*}.

The command can also be used to download ssh key files as sshkey-rsa, sshkey-rsa2, and sshkey-dsa and http secure-server certificates as sslpem-root, sslpem-server, sslpem-dhweak, and sslpem-dhstrong.

Files upload to PC

Syntax**copy startup-config <sourcefilename> <url>****copy {errorlog | log | traplog} <url>****copy script <sourcefilename> <url>****where <url>={xmodem | tftp://ipaddr/path/file}**

<sourcefilename> - The filename of a configuration file or a script file.

<url> - xmodem or tftp://ipaddr/path/file.

errorlog - event Log file.

log - message Log file.

traplog - trap Log file.

Default Setting

None

Command Mode

Privileged Exec

Files download from PC to board

Syntax

```
copy <url> startup-config <destfilename>
copy <url> image <destfilename>
copy <url> {sshkey-rsa1 | sshkey-rsa2 | sshkey-dsa}
copy <url> {sslpem-root | sslpem-server | sslpem-dhweak | sslpem-dhstrong}
copy <url> script <destfilename>
```

where <url>={xmodem | tftp://ipaddr/path/file}

<destfilename> - name of the image file or the script file.

<url> - xmodem or tftp://ipaddr/path/file.

sshkey-rsa1 - SSH RSA1 Key file.

sshkey-rsa2 - SSH RSA2 Key file.

sshkey-dsa - SSH DSA Key file.

sslpem-root - Secure Root PEM file.

sslpem-server - Secure Server PEM file.

sslpem-dhweak - Secure DH Weak PEM file.

sslpem-dhstrong - Secure DH Strong PEM file.

Default Setting

None

Command Mode

Privileged Exec

Write running configuration file into flash

Syntax

```
copy running-config startup-config [filename]
```

<filename> - name of the configuration file.

Default Setting

None

Command Mode

Privileged Exec

This command upload or download the pre-login banner file

Syntax

```
copy clibanner <url>
```

```
copy <url> clibanner
```

```
no clibanner
```

<url> - xmodem or tftp://ipaddr/path/file.

no - Delete CLI banner.

Default Setting

None

Command Mode

Privileged Exec

6.11.3 delete

This command is used to delete a configuration or image file.

Syntax

```
delete <filename>
```

<filename> - name of the configuration or image file.

Default Setting

None

Command Mode

Privileged Exec

6.11.4 dir

This command is used to display a list of files in Flash memory.

Syntax

dir [boot-rom | config | opcode [<filename>]]

<filename> - name of the configuration or image file.

boot-rom - bootrom.

config - configuration file.

opcode - run time operation code.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Column Heading	Description
date	The date that the file was created.
file name	The name of the file.
file type	File types: Boot-Rom, Operation Code, and Config file.
startup	Shows if this file is used when the system is started.
size	The length of the file in bytes.

6.11.5 whichboot

This command is used to display which files were booted when the system powered up.

Syntax**whichboot****Default Setting**

None

Command Mode

Privileged Exec

6.11.6 boot-system

This command is used to specify the file or image used to start up the system.

Syntax**boot-system {boot-rom | config | opcode} <filename>**

<filename> - name of the configuration or image file.

boot-rom - bootrom.

config - configuration file.

opcode - run time operation code.

Default Setting

None

Command Mode

Privileged Exec

6.11.7 ping

This command checks if another computer is on the network and listens for connections. To use this command, configure the switch for network (in-band) connection (as described in the *FASTPATH 2402/ 4802 Hardware User Guide*). The source and target devices must have the ping utility enabled and running on top of TCP/IP. The switch can be pinged from any IP workstation with which the switch is connected through the default VLAN (VLAN 1), as long as

there is a physical path between the switch and the workstation. The terminal interface sends, three pings to the target station.

Syntax

```
ping <host>
```

<host> - A host name or an IP address.

Default Setting

None

Command Mode

Privileged Exec

Ping on changing parameter value

Syntax

```
ping <host> count <0-20000000> [size <32-512>]  
ping <host> size <32-512> [count <0-20000000>]
```

<ipaddr> - an IP address.

<0-20000000> - number of pings (Range: 0 - 20000000). Note that 0 means infinite.

<size> - packet size (Range: 32 - 512).

Default Setting

Count = 5

Size = 32

Command Mode

Privileged Exec

6.11.8 traceroute

This command is used to discover the routes that packets actually take when traveling to their destination through the network on a hop-by-hop basis. **<ipaddr>** should be a valid IP address. **[port]** should be a valid decimal integer in the range of 0(zero) to 65535. The default value is

33434. The optional port parameter is the UDP port used as the destination of packets sent as part of the traceroute. This port should be an unused port on the destination system.

Syntax

```
traceroute <host> [hops <1-255> [waittime <1-255>]]  
traceroute <host> [waittime <1-255> [hops <1-255>]]
```

<host> - A host name or an IP address.

<1-255> - Time to wait for a response to a probe, in seconds.

<1-255> - The maximum time to live used in outgoing probe packets.

Default Setting

None

Command Mode

Privileged Exec

6.11.9 logging cli-command

This command enables the CLI command Logging feature. The Command Logging component enables the switch to log all Command Line Interface (CLI) commands issued on the system.

Syntax

```
logging cli-command
```

Default Setting

None

Command Mode

Global Config

6.11.10 calendar set

This command is used to set the system clock.

Syntax**calendar set <hh:mm:ss> <1-31> <1-12> <2000-2099>**

<hh:mm:ss> - hh in 24-hour format (Range: 0 - 23), mm (Range: 0 - 59), ss (Range: 0 - 59)

<1-31> - Day of month. (Range: 1 - 31).

<1-12> - Month. (Range: 1 - 12).

<2000-2099> - Year (4-digit). (Range: 2000 - 2099).

Default Setting

None

Command Mode

Privileged Exec

6.11.11 reload

This command resets the switch without powering it off. Reset means that all network connections are terminated and the boot code executes. The switch uses the stored configuration to initialize the switch. You are prompted to confirm that the reset should proceed. A successful reset is indicated by the LEDs on the switch. Note that if users specified <unit>, only the specified unit in the stack is reset.

Syntax**reload [slot <unit>]**

<unit> - Reload the specified unit in the stack.

Default Setting

None

Command Mode

Privileged Exec

6.11.12 configure

This command is used to activate global configuration mode

Syntax

```
configure
```

Default Setting

None

Command Mode

Privileged Exec

6.11.13 disconnect

This command is used to close a telnet session.

Syntax

```
disconnect {<0-10> | all}
```

<0-11> - telnet session ID.

all - all telnet sessions.

Default Setting

None

Command Mode

Privileged Exec

6.11.14 hostname

This command is used to set the prompt string.

Syntax

```
hostname <prompt_string>
```

< prompt_string > - Prompt string.

Default Setting

Korenix

Command Mode

Privileged Exec

6.11.15 quit

This command is used to exit a CLI session.

Syntax
quit

Default Setting

None

Command Mode

Privileged Exec

6.12 Differentiated Service Command

Note: *This Switching Command function can only be used on the QoS software version.*

This chapter contains the CLI commands used for the QOS Differentiated Services (DiffServ) package.

The user configures DiffServ in several stages by specifying:

1. Class

- creating and deleting classes
- defining match criteria for a class

Note: The only way to remove an individual match criterion from an existing class definition is to delete the class and re-create it.

2. Policy

- creating and deleting policies
- associating classes with a policy
- defining policy statements for a policy/class combination

3. Service

- adding and removing a policy to/from a directional (that is, inbound, outbound) interface

Packets are filtered and processed based on defined criteria. The filtering criteria are defined by a class. The processing is defined by a policy's attributes. Policy attributes may be defined on a per class instance basis, and it is these attributes that are applied when a match occurs.

Packet processing begins by testing the match criteria for a packet. A policy is applied to a packet when a class match within that policy is found.

Note that the type of class - all, any, or acl - has a bearing on the validity of match criteria specified when defining the class. A class type of 'any' processes its match rules in an ordered sequence; additional rules specified for such a class simply extend this list. A class type of 'acl' obtains its rule list by interpreting each ACL rule definition at the time the DiffServ class is created. Differences arise when specifying match criteria for a class type 'all', since only one value for each non-excluded match field is allowed within a class definition. If a field is already specified for a class, all subsequent attempts to specify the same field fail, including the cases where a field can be specified multiple ways through alternative formats. The exception to this is when the 'exclude' option is specified, in which case this restriction does not apply to the excluded fields.

The following class restrictions are imposed by the 7300 Series L3 Switch DiffServ design:

- nested class support limited to:
 - 'all' within 'all'
 - no nested 'not' conditions
 - no nested 'acl' class types
 - each class contains at most one referenced class
- hierarchical service policies not supported in a class definition
- access list matched by reference only, and must be sole criterion in a class
 - that is, ACL rules copied as class match criteria at time of class creation, with class type 'any'
 - implicit ACL 'deny all' rule also copied
 - no nesting of class type 'acl'

Regarding nested classes, referred to here as class references, a given class definition can contain at most one reference to another class, which can be combined with other match criteria. The referenced class is truly a reference and not a copy, since additions to a referenced class affect all classes that reference it. Changes to any class definition currently referenced by any other class must result in valid class definitions for all derived classes otherwise the change is rejected. A class reference may be removed from a class definition.

The user can display summary and detailed information for classes, policies, and services. All configuration information is accessible via the CLI, Web, and SNMP user interfaces.

6.12.1 General Commands

The following characteristics are configurable for the platform as a whole.

6.12.1.1 diffserv

This command sets the DiffServ operational mode to active. While disabled, the DiffServ configuration is retained and can be changed, but it is not activated. When enabled, Diffserv services are activated.

Syntax

diffserv

Command Mode

Global Config

6.12.1.2 no diffserv

This command sets the DiffServ operational mode to inactive. While disabled, the DiffServ configuration is retained and can be changed, but it is not activated. When enabled, Diffserv services are activated.

Syntax

no diffserv

Command Mode

Global Config

6.12.2 Class Commands

The 'class' command set is used in DiffServ to define:

Traffic Classification specifies Behavior Aggregate (BA) based on DSCP, and Multi-Field (MF) classes of traffic (name, match criteria)

Service Levels specifies the BA forwarding classes / service levels. Conceptually, DiffServ is a two-level hierarchy of classes: 1. Service/PHB, 2. Traffic Class

This set of commands consists of class creation/deletion and matching, with the class match commands specifying layer 3, layer 2, and general match criteria. The class match criteria are also known as class rules, with a class definition consisting of one or more rules to identify the traffic belonging to the class. Note that once a class match criterion is created for a class, it cannot be changed or deleted - the entire class must be deleted and re-created.

The CLI command root is ***class-map***.

6.12.2.1 class-map

This command defines a new DiffServ class of type match-all, match-any or match-access-group.

Syntax

```
class-map [ match-all ] <class-map-name>
```

<class-map-name> is a case sensitive alphanumeric string from 1 to 31 characters uniquely identifying the class.

Note: The class name 'default' is reserved and must not be used here. When used without any match condition, this command enters the class-map mode. The **<class-map-name>** is the name of an existing DiffServ class.

Note: The class name 'default' is reserved and is not allowed here. The class type of **match-all** indicates all of the individual match conditions must be true for a packet to be considered a member of the class. The class type of **match-access-group** indicates the individual class match criteria are evaluated based on an access list (ACL).

<aclid> is an integer specifying an existing ACL number (refer to the appropriate ACL documentation for the valid ACL number range). A **matchaccess-group** class type copies its set of match criteria from the current rule definition of the specified ACL number. All elements of a single ACL Rule are treated by DiffServ as a grouped set, similar to class type all. For any class, at least one class match condition must be specified for the class to be considered valid.

Note: The class match conditions are obtained from the referenced access list **at the time of class creation**. Thus, any subsequent changes to the referenced ACL definition do not affect the DiffServ class. To pick up the latest ACL definition, the DiffServ class must be deleted and recreated. This command may be used without specifying a class type to enter the Class-Map Config mode for an existing DiffServ class.

Note: The CLI mode is changed to Class-Map Config when this command is successfully executed.

Command Mode
Global Config

6.12.2.2 no class-map

This command eliminates an existing DiffServ class.

Syntax

```
no class-map <class-map-name>
```

<class-map-name> is the name of an existing DiffServ class.

Note: The class name 'default' is reserved and is not allowed here. This command may be

issued at any time; if the class is currently referenced by one or more policies or by any other class, this deletion attempt shall fail.

Command Mode

Global Config

6.12.2.3 class-map rename

This command changes the name of a DiffServ class.

Syntax

```
class-map rename <class-map-name> <new-class-map-name>
```

<class-map-name> is the name of an existing DiffServ class.

<new-class-map-name> is a case-sensitive alphanumeric string from 1 to 31 characters uniquely identifying the class.

Note: The class name 'default' is reserved and must not be used here.

Default

None

Command Mode

Global Config

6.12.2.4 match any

This command adds to the specified class definition a match condition whereby all packets are considered to belong to the class.

Syntax

```
match any
```

Default

None

Command Mode

Class-Map Config

6.12.2.5 match class-map

This command adds to the specified class definition the set of match conditions defined for another class.

Syntax

match class-map <refclassname>

<refclassname> is the name of an existing DiffServ class whose match conditions are being referenced by the specified class definition.

Note: There is no **[not]** option for this match command.

Default

None

Command Mode

Class-Map Config

Restrictions The class types of both **<classname>** and **<refclassname>** must be identical (that is, any vs. any, or all vs. all). A class type of acl is not supported by this command. Cannot specify **<refclassname>** the same as **<classname>** (that is, self-referencing of class name not allowed). At most one other class may be referenced by a class. Any attempt to delete the **<refclassname>** class while still referenced by any **<classname>** shall fail.

The combined match criteria of **<classname>** and **<refclassname>** must be an allowed combination based on the class type. Any subsequent changes to the **<refclassname>** class match criteria must maintain this validity, or the change attempt shall fail. The total number of class rules formed by the complete reference class chain (includes both predecessor and successor classes) must not exceed a platform-specific maximum. In some cases, each removal of a refclass rule reduces the maximum number of available rules in the class definition by one.

6.12.2.6 no match class-map

This command removes from the specified class definition the set of match conditions defined for another class.

Syntax

no match class-map <refclassname>
--

<refclassname> is the name of an existing DiffServ class whose match conditions are being referenced by the specified class definition.

Note: There is no **[not]** option for this match command.

Default

None

Command Mode

Class-Map Config

6.12.2.7 match dstip

This command adds to the specified class definition a match condition based on the destination IP address of a packet.

Syntax

match dstip <ipaddr> <ipmask>
--

<ipaddr> specifies an IP address.

<ipmask> specifies an IP address bit mask; note that although similar to a standard subnet mask, this bit mask need not be contiguous.

Default

None

Command Mode

Class-Map Config

6.12.2.8 match dstl4port

This command adds to the specified class definition a match condition based on the destination layer 4 port of a packet using a single keyword or numeric notation or a numeric range notation.

Syntax

match dstl4port {<portkey> <0-65535>}
--

To specify the match condition as a single keyword, the value for **<portkey>** is one of the supported port name keywords. The currently supported **<portkey>** values are: **domain, echo, ftp, ftpdata, http, smtp, snmp, telnet, tftp, www**. Each of these translates into its equivalent port number, which is used as both the start and end of a port range.

To specify the match condition using a numeric notation, one layer 4 port number is required.

The port number is an integer from 0 to 65535.

To specify the match condition using a numeric range notation, two layer 4 port numbers are required and together they specify a contiguous port range. Each port number is an integer from 0 to 65535, but with the added requirement that the second number be equal to or greater than the first.

Default

None

Command Mode

Class-Map Config

6.12.2.9 match ip dscp

This command adds to the specified class definition a match condition based on the value of the IP DiffServ Code Point (DSCP) field in a packet, which is defined as the high-order six bits of the Service Type octet in the IP header (the low-order two bits are not checked).

Syntax

```
match ip dscp <value>
```

<dscpval> value is specified as either an integer from 0 to 63, or symbolically through one of the following keywords: **af11, af12, af13, af21, af22, af23, af31, af32, af33, af41, af42, af43, be, cs0, cs1, cs2, cs3, cs4, cs5, cs6, cs7, ef**.

Note: The ip dscp, ip precedence, and ip tos match conditions are alternative ways to specify a match criterion for the same Service Type field in the IP header, but with a slightly different user notation.

Note: To specify a match on all DSCP values, use the match [not] ip tos <tosbits> <tosmask> command with **<tosbits>** set to 0 and **<tosmask>** set to 03 (hex).

Default

None

Command Mode

Class-Map Config

6.12.2.10 match ip precedence

This command adds to the specified class definition a match condition based on the value of the IP Precedence field in a packet, which is defined as the high-order three bits of the Service

Type octet in the IP header (the low-order five bits are not checked). The precedence value is an integer from 0 to 7.

Syntax

```
match ip precedence <0-7>
```

Note: The ip dscp, ip precedence, and ip tos match conditions are alternative ways to specify a match criterion for the same Service Type field in the IP header, but with a slightly different user notation.

Note: To specify a match on all Precedence values, use the match [not] ip tos <tosbits> <tosmask> command with <tosbits> set to 0 and <tosmask> set to 1F (hex).

Default

None

Command Mode

Class-Map Config

6.12.2.11 match ip tos

This command adds to the specified class definition a match condition based on the value of the IP TOS field in a packet, which is defined as all eight bits of the Service Type octet in the IP header.

Syntax

```
match ip tos <tosbits> <tosmask>
```

<tosbits> is a two-digit hexadecimal number from 00 to ff.

<tosmask> is a two-digit hexadecimal number from 00 to ff.

The <tosmask> denotes the bit positions in <tosbits> that are used for comparison against the IP TOS field in a packet. For example, to check for an IP TOS value having bits 7 and 5 set and bit 1 clear, where bit 7 is most significant, use a <tosbits> value of a0 (hex) and a <tosmask> of a2 (hex).

Note: The ip dscp, ip precedence, and ip tos match conditions are alternative ways to specify a match criterion for the same Service Type field in the IP header, but with a slightly different user notation.

Note: In essence, this the “free form” version of the IP DSCP/Precedence/TOS match specification in that the user has complete control of specifying which bits of the IP Service Type field are checked.

Default

None

Command Mode

Class-Map Config

6.12.2.12 match protocol

This command adds to the specified class definition a match condition based on the value of the IP Protocol field in a packet using a single keyword notation or a numeric value notation.

Syntax

```
match protocol {<protocol-name> | <0-255>}
```

<protocol-name> is one of the supported protocol name keywords. The currently supported values are: **icmp**, **igmp**, **ip**, **tcp**, **udp**. Note that a value of **ip** is interpreted to match all protocol number values. To specify the match condition using a numeric value notation, the protocol number is a standard value assigned by IANA and is interpreted as an integer from 0 to 255.

Note: This command does not validate the protocol number value against the current list defined by IANA.

Default

None

Command Mode

Class-Map Config

6.12.2.13 match srcip

This command adds to the specified class definition a match condition based on the source IP address of a packet.

Syntax

```
match srcip <ipaddr> <ipmask>
```

<ipaddr> specifies an IP address.

<ipmask> specifies an IP address bit mask; note that although it resembles a standard subnet mask, this bit mask need not be contiguous.

Default

None

Command Mode

Class-Map Config

6.12.2.14 match srcl4port

This command adds to the specified class definition a match condition based on the source layer 4 port of a packet using a single keyword or numeric notation or a numeric range notation.

Syntax

```
match srcl4port {<portkey> | <0-65535>}
```

<portkey> is one of the supported port name keywords (listed below).

The currently supported <portkey> values are: domain, echo, ftp, ftpdata, http, smtp, snmp, telnet, tftp, www. Each of these translates into its equivalent port number, which is used as both the start and end of a port range.

To specify the match condition as a numeric value, one layer 4 port number is required. The port number is an integer from 0 to 65535.

To specify the match condition as a range, two layer 4 port numbers are required and together they specify a contiguous port range. Each port number is an integer from 0 to 65535, but with the added requirement that the second number be equal to or greater than the first.

Default

None

Command Mode

Class-Map Config

6.12.3 Policy Commands

The 'policy' command set is used in DiffServ to define:

Traffic Conditioning Specify traffic conditioning actions (policing, marking, shaping) to apply to traffic classes

Service Provisioning Specify bandwidth and queue depth management requirements of service levels (EF, AF, etc.)

The policy commands are used to associate a traffic class, which was defined by the class command set, with one or more QoS policy attributes. This association is then assigned to an interface in a particular direction to form a service. The user specifies the policy name when the policy is created.

The DiffServ CLI does not necessarily require that users associate only one traffic class to one policy. In fact, multiple traffic classes can be associated with a single policy, each defining a particular treatment for packets that match the class definition. When a packet satisfies the conditions of more than one class, preference is based on the order in which the classes were added to the policy, with the foremost class taking highest precedence.

This set of commands consists of policy creation/deletion, class addition/removal, and individual policy attributes. Note that the only way to remove an individual policy attribute from a class instance within a policy is to remove the class instance and re-add it to the policy. The values associated with an existing policy attribute can be changed without removing the class instance.

The CLI command root is ***policy-map***.

6.12.3.1 assign-queue

This command modifies the queue id to which the associated traffic stream is assigned. The queueid is an integer from 0 to n-1, where n is the number of egress queues supported by the device.

Syntax

assign-queue <0-6>

<0-6> - Queue ID.

Command Mode

Policy-Class-Map Config

6.12.3.2 drop

This command specifies that all packets for the associated traffic stream are to be dropped at ingress.

Syntax

drop

Command Mode

Policy-Class-Map Config

6.12.3.3 redirect

This command specifies that all incoming packets for the associated traffic stream are redirected to a specific egress interface (physical port or port-channel).

Syntax

redirect <unit/slot/port>
--

Command Mode

Policy-Class-Map Config

6.12.3.4 conform-color

This command is used to enable color-aware traffic policing and define the conform-color class maps used. Used in conjunction with the police command where the fields for the conform level (for simple, single-rate, and two-rate policing) are specified. The <class-map-name> parameter is the name of an existing Diffserv class map, where different ones must be used for the conform and exceed colors.

Syntax**conform-color <class-map-name>**

<class-map-name> - Name of an existing Diffserv class map, where different ones must be used for the conform colors.

Command Mode

Policy-Class-Map Config

6.12.3.5 mark cos

This command marks all packets for the associated traffic stream with the specified class of service value in the priority field of the 802.1p header. If the packet does not already contain this header, one is inserted. The CoS value is an integer from 0 to 7.

Syntax**mark cos <0-7>**

<0-7> - The range of COS value is 0 to 7.

Command Mode

Policy-Class-Map Config

Policy Type

In

6.12.3.6 class

This command creates an instance of a class definition within the specified policy for the purpose of defining treatment of the traffic class through subsequent policy attribute statements.

Syntax

class <classname>

<classname> is the name of an existing DiffServ class. Note that this command causes the specified policy to create a reference to the class definition.

Command Mode

Policy-Class-Map Config

6.12.3.7 no class

This command deletes the instance of a particular class and its defined treatment from the specified policy.

Syntax

no class <classname>

<classname> is the name of an existing DiffServ class. Note that this command removes the reference to the class definition for the specified policy.

Command Mode

Policy-Class-Map Config

6.12.3.8 mark ip-dscp

This command marks all packets for the associated traffic stream with the specified IP DSCP value.

Syntax

mark ip-dscp <value>

<value> is specified as either an integer from 0 to 63, or symbolically through one of the following keywords: **af11, af12, af13, af21, af22, af23, af31, af32, af33, af41, af42, af43, be, cs0, cs1, cs2, cs3, cs4, cs5, cs6, cs7, ef**.

Command Mode

Policy-Class-Map Config

Policy Type In**Incompatibilities** Mark IP Precedence, Police (all forms)**6.12.3.9 mark ip-precedence**

This command marks all packets for the associated traffic stream with the specified IP

Precedence value. The IP Precedence value is an integer from 0 to 7.

Syntax

```
mark ip-precedence <0-7>
```

Command Mode

Policy-Class-Map Config

Policy Type In

Incompatibilities Mark IP DSCP, Police (all forms)

6.12.3.10 police-simple

This command is used to establish the traffic policing style for the specified class.

Syntax

```
police-simple {<1-4294967295> <1-128> conform-action
{drop | set-cos-transmit <0-7> | set-prec-transmit <0-7> | set-dscp-transmit
<value> | transmit} [violate-action {drop | set-prec-transmit <0-7> | set-dscp-transmit
<0-63> | transmit}]}
```

The simple form of the police command uses a single data rate and burst size, resulting in two outcomes:

<conform-action & violate-action> The conforming data rate is specified in kilobits-per-second (Kbps) and is an integer from 1 to 4294967295. The conforming burst size is specified in kilobytes (KB) and is an integer from 1 to 128. For each outcome, the only possible actions are drop, set-dscp-transmit, set-prec-transmit, or transmit. In this simple form of the police command, the conform action defaults to transmit and the violate action defaults to drop. These actions can be set with this command once the style has been configured.

<set-cos-transmit>, an priority value is required and is specified as an integer from 0-7.

<set-dscp-transmit> is required and is specified as either an integer from 0 to 63, or symbolically through one of the following keywords: **af11, af12, af13, af21, af22, af23, af31, af32, af33, af41, af42, af43, be, cs0, cs1, cs2, cs3, cs4, cs5, cs6, cs7, ef**.

<set-prec-transmit>, an IP Precedence value is required and is specified as an integer from 0-7.

Command Mode

Policy-Class-Map Config

Restrictions Only one style of police command, simple, is allowed for a given class instance in a particular policy.

Policy Type In

Incompatibilities Mark COS, Mark IP DSCP, Mark IP Precedence

6.12.3.11 policy-map

This command establishes a new DiffServ policy. The <polycyname> parameter is a case-sensitive alphanumeric string from 1 to 31 characters uniquely identifying the policy. The type of policy is specific to the inbound traffic direction as indicated by the in parameter.

Syntax

policy-map <polycyname> [in] no policy-map <polycyname>
--

Command Mode

Global Config

Policy Type In

6.12.3.12 policy-map rename

This command changes the name of a DiffServ policy. The <polycyname> is the name of an existing DiffServ class. The <newpolycyname> parameter is a case-sensitive alphanumeric string from 1 to 31 characters uniquely identifying the policy.

Syntax

policy-map rename <polycyname> <newpolycyname>

<polycyname> - Old Policy name.

<newpolycyname> - New policy name.

Command Mode

Global Config

Policy Type In

6.12.4 Service Commands

The 'service' command set is used in DiffServ to define:

Traffic Conditioning	Assign a DiffServ traffic conditioning policy (as specified by the policy commands) to an interface in the incoming direction.
Service Provisioning	Assign a DiffServ service provisioning policy (as specified by the policy commands) to an interface in the outgoing direction

The service commands attach a defined policy to a directional interface. Only one policy may be assigned at any one time to an interface in a particular direction. The policy type (in, out) must match the interface direction to which it is attached.

This set of commands consists of service addition/removal.

The CLI command root is **service-policy**

6.12.4.1 service-policy

This command attaches a policy to an interface in a particular direction.

Syntax

```
service-policy in <policy-map-name>
```

The command can be used in the **Interface Config** mode to attach a policy to a specific interface. Alternatively, the command can be used in the **Global Config** mode to attach this policy to all system interfaces. The direction value is either in or out.

<policy-map-name> is the name of an existing DiffServ policy, whose type must match the interface direction. Note that this command causes a service to create a reference to the policy.

Note: This command effectively enables DiffServ on an interface (in a particular direction). There is no separate interface administrative 'mode' command for DiffServ.

Note: This command shall fail if any attributes within the policy definition exceed the capabilities of the interface. Once a policy is successfully attached to an interface, any attempt to change the policy definition such that it would result in a violation of said interface capabilities shall cause the policy change attempt to fail.

Command Mode

Global Config (for all system interfaces)
Interface Config (for a specific interface)

Restrictions Only a single policy may be attached to a particular interface in a particular direction at any one time.

6.12.4.2 no service-policy

This command detaches a policy from an interface in a particular direction.

Syntax

no service-policy in <policy-map-name>

The command can be used in the Interface Config mode to detach a policy from a specific interface. Alternatively, the command can be used in the Global Config mode to detach this policy from all system interfaces to which it is currently attached. The direction value is either in or out.

<policy-map-name> is the name of an existing DiffServ policy. Note that this command causes a service to remove its reference to the policy.

Note: This command effectively disables DiffServ on an interface (in a particular direction). There is no separate interface administrative 'mode' command for DiffServ.

Command Mode

Global Config (for all system interfaces)
Interface Config (for a specific interface)

6.12.5 Show Commands

The 'show' command set is used in DiffServ to display configuration and status information for:

- Classes
- Policies
- Services

This information can be displayed in either summary or detailed formats. The status information is only shown when the DiffServ administrative mode is enabled; it is suppressed otherwise. There is also a 'show' command for general DiffServ information that is available at any time.

6.12.5.1 show class-map

This command displays all configuration information for the specified class.

Syntax

show class-map [<classname>]

<classname> is the name of an existing DiffServ class.

Default Setting

None

Command Mode

Privileged EXEC and User EXEC

Display Message

Class Name The name of this class.

Class Type The class type (all, any, or acl) indicating how the match criteria are evaluated for this class. A class type of all means every match criterion defined for the class is evaluated simultaneously they must all be true to indicate a class match. For a type of any each match criterion is evaluated sequentially and only one need be true to indicate a class match. Class type acl rules are evaluated in a hybrid manner, with those derived from each ACL Rule grouped and evaluated simultaneously, while each such grouping is evaluated sequentially.

Match Criteria The Match Criteria fields will only be displayed if they have been configured. They will be displayed in the order entered by the user. These are evaluated in accordance with the class type. The possible Match Criteria fields are: Class of Service, Destination IP Address, Destination Layer 4 Port, Destination MAC Address, Every, IP DSCP, IP Precedence, IP TOS, Protocol Keyword, Reference Class, Source IP Address, Source Layer 4 Port, Source MAC Address, and VLAN.

Values This field displays the values of the Match Criteria.

Excluded This field indicates whether this Match Criteria is excluded. If the Class Name is not specified, this command displays a list of all defined DiffServ classes. The following fields are displayed:

Class Name The name of this class. (Note that the order in which classes are displayed is not necessarily the same order in which they were created.)

Class Type The class type (all, any, or acl) indicating how the match criteria are evaluated for this class. A class type of all means every match criterion defined for the class is evaluated simultaneously they must all be true to indicate a class match. For a type of any each match criterion is evaluated sequentially and only one need be true to indicate a class match. Class type acl rules are evaluated in a hybrid manner, with those derived from each ACL Rule grouped and evaluated simultaneously, while each such grouping is evaluated sequentially.

ACL Number The ACL number used to define the class match conditions at the time the class was created. This field is only meaningful if the class type is acl. (Note that the contents of the ACL may have changed since this class was created.)

Ref Class Name The name of an existing DiffServ class whose match conditions are being referenced by the specified class definition.

6.12.5.2 show diffserv

This command displays the DiffServ General Status Group information, which includes the current administrative mode setting as well as the current and maximum number of rows in each of the main DiffServ private MIB tables.

Syntax

show diffserv

Default Setting

None

Command Mode

Privileged EXEC and User EXEC

Display Message

DiffServ Admin mode The current value of the DiffServ administrative mode.

Class Table Size Current/Max The current or maximum number of entries (rows) in the Class Table.

Class Rule Table Size Current/Max The current or maximum number of entries (rows) in the Class Rule Table.

Policy Table Size Current/Max The current or maximum number of entries (rows) in the Policy Table.

Policy Instance Table Size Current/Max The current or maximum number of entries (rows) in the Policy Instance Table.

Policy Attribute Table Size Current/Max The current or maximum number of entries (rows) in the Policy Attribute Table.

Service Table Size Current/Max The current or maximum number of entries (rows) in the Service Table.

6.12.5.3 show policy-map

This command displays all configuration information for the specified policy.

Syntax

show policy-map [<policy-map-name>]
--

<policy-map-name> is the name of an existing DiffServ policy.

Default Setting

None

Command Mode

Privileged EXEC

Display Message

Policy Name The name of this policy.

Policy Type The policy type, namely whether it is an inbound or outbound policy definition.

The following information is repeated for each class associated with this policy (only those policy attributes actually configured are displayed):

Class Name The name of this class.

Mark CoS Denotes the class of service value that is set in the 802.1p header of outbound packets. This is not displayed if the mark cos was not specified.

Mark IP DSCP Denotes the mark/re-mark value used as the DSCP for traffic matching this class. This is not displayed if mark ip description is not specified using the police-two-rate command, or if policing is in use for the class under this policy.

Mark IP Precedence Denotes the mark/re-mark value used as the IP Precedence for traffic matching this class. This is not displayed if either mark DSCP or policing is in use for the class under this policy.

Policing Style This field denotes the style of policing, if any, used simple.

Committed Rate (Kbps) This field displays the committed rate, used in simple policing, single-rate policing, and two-rate policing.

Committed Burst Size (KB) This field displays the committed burst size, used in simple policing.

Conform Action The current setting for the action taken on a packet considered to conform to the policing parameters. This is not displayed if policing is not in use for the class under this policy.

Conform COS Value This field shows the priority mark value if the conform action is markcos.

Conform DSCP Value This field shows the DSCP mark value if the conform action is markdscp.

Conform IP Precedence Value This field shows the IP Precedence mark value if the conform action is markprec.

Non-Conform Action The current setting for the action taken on a packet considered to not conform to the policing parameters. This is not displayed if policing not in use for the class under this policy.

Non-Conform DSCP Value This field displays the DSCP mark value if this action is markdscp.

Non-Conform IP Precedence Value This field displays the IP Precedence mark value if this action is markprec.

Bandwidth This field displays the minimum amount of bandwidth reserved in either percent or kilobits-per-second.

Policy Name The name of this policy. (Note that the order in which the policies are displayed is not necessarily the same order in which they were created.)

Policy Type The policy type, namely whether it is an inbound or outbound policy definition.

Class Members List of all class names associated with this policy.

6.12.5.4 show diffserv service

This command displays policy service information for the specified interface and direction.

Syntax

show diffserv service <unit/slot/port> in
--

<unit/slot/port> specifies a valid slot number and port number for the system. The direction parameter indicates the interface direction of interest.

Default Setting

None

Command Mode

Privileged EXEC

Display Message

DiffServ Admin Mode The current setting of the DiffServ administrative mode. An attached policy is only in effect on an interface while DiffServ is in an enabled mode.

Interface The slot number and port number of the interface (unit/slot/port).

Direction The traffic direction of this interface service.

Operational Status The current operational status of this DiffServ service interface.

Policy Name The name of the policy attached to the interface in the indicated direction.

Policy Details Attached policy details, whose content is identical to that described for the show policy-map <polycymapname> command (content not repeated here for brevity).

6.12.5.5 show diffserv service brief

This command displays all interfaces in the system to which a DiffServ policy has been attached. The direction parameter is optional; if specified, only services in the indicated direction are shown.

Syntax

show diffserv service brief [in]

Default Setting

None

Command Mode

Privileged EXEC

Display Message

DiffServ Admin Mode The current setting of the DiffServ administrative mode. An attached policy is only active on an interface while DiffServ is in an enabled mode.

The following information is repeated for interface and direction (only those interfaces configured with an attached policy are shown):

Interface The slot number and port number of the interface (unit/slot/port).

Direction The traffic direction of this interface service.

OperStatus The current operational status of this DiffServ service interface.

Policy Name The name of the policy attached to the interface in the indicated direction.

6.12.5.6 show policy-map interface

This command displays policy-oriented statistics information for the specified interface and direction.

Syntax

show policy-map interface <unit/slot/port> in
--

<unit/slot/port> specifies a valid slot number and port number for the system. The direction parameter indicates the interface direction of interest.

Command Mode

Privileged EXEC

Display Message

Interface The slot number and port number of the interface (unit/slot/port).

Direction The traffic direction of this interface service, either in or out.

Operational Status The current operational status of this DiffServ service interface.

Policy Name The name of the policy attached to the interface in the indicated direction.

Interface Offered Octets/Packets A cumulative count of the octets/packets offered to this service interface in the specified direction before the defined DiffServ treatment is applied.

Interface Discarded Octets/Packets A cumulative count of the octets/packets discarded by this service interface in the specified direction for any reason due to DiffServ treatment.

Interface Sent Octets/Packets A cumulative count of the octets/packets forwarded by this service interface in the specified direction after the defined DiffServ treatment was applied. In this case, forwarding means the traffic stream was passed to the next functional element in the data path, such as the switching or routing function or an outbound link transmission element.

The following information is repeated for each class instance within this policy:

Class Name The name of this class instance.

In Offered Octets/Packets A count of the octets/packets offered to this class instance before the defined DiffServ treatment is applied. Only displayed for the 'in' direction.

In Discarded Octets/Packets A count of the octets/packets discarded for this class instance for any reason due to DiffServ treatment of the traffic class. Only displayed for the 'in' direction.

Tail Dropped Octets/Packets A count of the octets/packets discarded due to tail dropping from a transmission queue, typically due to the effects of traffic shaping. These counts may not be supported on all platforms. Only displayed for the 'out' direction.

Random Dropped Octets/Packets A count of the octets/packets discarded due to WRED active queue depth management, typically due to the effects of traffic shaping. These counts are only applicable for a class instance whose policy attributes includes random dropping, and may not be supported on all platforms. Only displayed for the 'out' direction.

Shape Delayed Octets/Packets A count of the octets/packets that were delayed due to traffic shaping. These counts are only applicable for a class instance whose policy attributes includes shaping, and may not be supported on all platforms. Only displayed for the 'out' direction.

Sent Octets/Packets A count of the octets/packets forwarded for this class instance after the defined DiffServ treatment was applied. In this case, forwarding means the traffic stream was passed to the next functional element in the data path, such as the switching or routing function or an outbound link transmission element. Only displayed for the 'out' direction.

Note: None of the counters listed here are guaranteed to be supported on all platforms. Only supported counters are shown in the display output.

6.12.5.7 show service-policy

This command displays a summary of policy-oriented statistics information for all interfaces in the specified direction. The direction parameter indicates the interface direction of interest. This command enables or disables the route reflector client. A route reflector client relies on a route reflector to re-advertise its routes to the entire AS. The possible values for this field are **enable** and **disable**.

Syntax

show service-policy [in]

Command Mode

Privileged EXEC

Display Message

The following information is repeated for each interface and direction (only those interfaces configured with an attached policy are shown):

Interface The slot number and port number of the interface (unit/slot/port).

Operational Status The current operational status of this DiffServ service interface.

Policy Name The name of the policy attached to the interface.

Note: None of the counters listed here are guaranteed to be supported on all platforms. Only supported counters are shown in the display output.

6.13 ACL Command

6.13.1 Show Commands

6.13.1.1 show mac access-lists

This command displays a MAC access list and all of the rules that are defined for the ACL. The <name> parameter is used to identify a specific MAC ACL to display.

Syntax

show mac access-list <name>
--

<name> ACL name which uniquely identifies the MAC ACL to display.

Default Setting

None

Command Mode

Privileged EXEC

Display Message**MAC ACL Name** The name of the MAC ACL rule.**Rule Number** The ordered rule number identifier defined within the ACL.**Action** Displays the action associated with each rule. The possible values are Permit or Deny.**Source MAC Address** Displays the source MAC address for this rule.**Source MAC Mask** Displays the source MAC mask for this rule.**Destination MAC Address** Displays the destination MAC address for this rule.**Destination MAC Mask** Displays the destination MAC mask for this rule.**Ethertype** Displays the Ethertype keyword or custom value for this rule.**VLAN ID** Displays the VLAN identifier value or range for this rule.**CoS Value** Displays the COS (802.1p) value for this rule.**Secondary VLAN ID** Displays the Secondary VLAN identifier value or range for this rule.**Secondary COS** Displays the Secondary COS (802.1p) value for this rule.**Assign Queue** Displays the queue identifier to which packets matching this rule are assigned.**Redirect Interface** Displays the unit/slot/port to which packets matching this rule are forwarded.**6.13.1.2 show mac access-lists**

This command displays a summary of all defined MAC access lists in the system.

Syntax

show mac access-list

Default Setting

None

Command Mode

Privileged EXEC

Display Message

Current number of all ACLs The number of user-configured rules defined for this ACL.

Maximum number of all ACLs The maximum number of ACL rules.

MAC ACL Name The name of the MAC ACL rule.

Rules The number of rule in this ACL.

Direction Denotes the direction in which this MAC ACL is attached to the set of interfaces listed. The possible values are Inbound or Outbound.

Interfaces Displays the list of interfaces (unit/slot/port) to which this MAC ACL is attached in a given direction.

6.13.1.3 show ip access-lists

This command displays an Access Control List (ACL) and all of the rules that are defined for the ACL.

Syntax

```
show ip access-lists [<1-199>]
```

<1-199> is the number used to identify the ACL.

Default Setting

None

Command Mode

Privileged EXEC

Display Message

Current number of ACLs The number of user-configured rules defined for this ACL.

Maximum number of ACLs The maximum number of ACL rules.

ACL ID The identifier of this ACL.

Rule This displays the number identifier for each rule that is defined for the ACL.

Action This displays the action associated with each rule. The possible values are Permit or Deny.

Match ALL Match all packets or not.

Protocol This displays the protocol to filter for this rule.

Source IP Address This displays the source IP address for this rule.

Source IP Mask This field displays the source IP Mask for this rule.

Source Ports This field displays the source port range for this rule.

Destination IP Address This displays the destination IP address for this rule.

Destination IP Mask This field displays the destination IP Mask for this rule.

Destination Ports This field displays the destination port range for this rule.

Service Type Field Match This field indicates whether an IP DSCP, IP Precedence, or IP TOS match condition is specified for this rule.

Service Type Field Value This field indicates the value specified for the Service Type Field

Match (IP DSCP, IP Precedence, or IP TOS).

6.13.1.4 show access-lists interface

This command displays Access List information for a particular interface and the 'in' direction.

Syntax

show access-lists interface <unit/slot/port> in
--

<unit/slot/port> is the interface number.

Default Setting

None

Command Mode

Privileged EXEC

Display Message

ACL Type This displays ACL type is IP or MAC.

ACL ID This displays the ACL ID.

Sequence Number This indicates the order of this access list relative to other access lists already assigned to this interface and direction. A lower number indicates higher precedence order.

6.13.2 Configuration Commands

6.13.2.1 mac access-list extended

This command creates a MAC Access Control List (ACL) identified by <name>, consisting of classification fields defined for the Layer 2 header of an Ethernet frame. The <name> parameter is a case-sensitive alphanumeric string from 1 to 31 characters uniquely identifying the MAC access list. If a MAC ACL by this name already exists, this command enters Mac-Access-List config mode to allow updating the existing ACL.

Syntax

mac access-list extended <name>
--

no mac access-list extended <name>

<name> - It uniquely identifies the MAC access list.

Default Setting

None

Command Mode

Global Config

6.13.2.2 mac access-list extended

This command changes the name of a MAC Access Control List (ACL). The **<name>** parameter is the name of an existing MAC ACL. The **<newname>** parameter is a case-sensitive alphanumeric string from 1 to 31 characters uniquely identifying the MAC access list. This command fails if a MAC ACL by the name **<newname>** already exists.

Syntax

mac access-list extended rename <name> <newname>

<name> - Old name which uniquely identifies the MAC access list.

<newname> - New name which uniquely identifies the MAC access list.

Default Setting

None

Command Mode

Global Config

6.13.2.3 mac access-list

This command creates a new rule for the current MAC access list. Each rule is appended to the list of configured rules for the list. Note that an implicit 'deny all' MAC rule always terminates the access list. Note: The 'no' form of this command is not supported, as the rules within an ACL cannot be deleted individually. Rather, the entire ACL must be deleted and re-specified.

A rule may either deny or permit traffic according to the specified classification fields. At a minimum, the source and destination MAC value and mask pairs must be specified, each of which may be substituted using the keyword any to indicate a match on any value in that field. The bpdv keyword may be specified for the destination MAC value/mask pair indicating a well-known BPDU MAC value of 01-80-c2-xx-xx-xx (hex), where 'xx' indicates a don't care. The remaining command parameters are all optional. The Ethertype may be specified as either a keyword or a four-digit hexadecimal value from 0x0600-0xFFFF. The currently supported <ethertypekey> values are: appletalk, arp, ibmsna, ipv4, ipv6, ipx, mplsmlcast, mplsucast, netbios, novell, pppoe, rarp. Each of these translates into its equivalent Ethertype value(s). The assign-queue parameter allows specification of a particular hardware queue for handling traffic that matches this rule. The allowed <queue-id> value is 0-(n-1), where n is the number of user configurable queues available for the hardware platform. The redirect parameter allows the traffic matching this rule to be forwarded to the specified <unit/slot/port>. The assign-queue and redirect parameters are only valid for a 'permit' rule.

Syntax

```
{deny|permit} {{<srcmac> <srcmacmask> | any} {{<dstmac> <dstmacmask>| any |  
bpdv} [<ethertypekey> | <0x0600-0xFFFF>] [vlan {eq <1-3965>}] [cos <0-7>]  
[assign-queue <0-6>] [redirect <unit/slot/port>]
```

Default Setting

None

Command Mode

Mac Access-list Config

6.13.2.4 mac access-group in

This command attaches a specific MAC Access Control List (ACL) identified by <name> to an interface in a given direction. The <name> parameter must be the name of an existing MAC ACL. An optional sequence number may be specified to indicate the order of this access list relative to other access lists already assigned to this interface and direction. A lower number indicates higher precedence order. If a sequence number is already in use for this interface and direction, the specified access list replaces the currently attached access list using that sequence number. If the sequence number is not specified for this command, a sequence number that is one greater than the highest sequence number currently in use for this interface and direction will be used. This command specified in 'Interface Config' mode only affects a single interface, whereas the 'Global Config' mode setting is applied to all interfaces. The 'Interface Config' mode command is only available on platforms that support independent per-port class of service queue configuration.

Syntax

```
mac access-group <name> in [<1-4294967295>]
no mac access-group <name> in
```

<no> - This command removes a MAC ACL identified by <name> from the interface in a given direction.

Default Setting

None

Command Mode

Global Config, Interface Config

6.13.2.5 access-list

This command creates an Access Control List (ACL) that is identified by the parameter.

Syntax

```
access-list {( <1-99> {deny | permit} <srcip> <srcmask> )
| ( <100-199> {deny | permit} {evry | {{icmp | igmp | ip | tcp | udp | <number>} <srcip>
<srcmask> [{eq {<portkey> | <portvalue>}}] <dstip> <dstmask> [{eq {<portkey> |
<portvalue>}}] [precedence <precedence>] [tos <tos> <tosmask>] [dscp <dscp>]]}}}
```

<accesslistnumber>. The ACL number is an integer from 1 to 199. The range 1 to 99 is for the normal ACL List and 100 to 199 is for the extended ACL List.

permit or deny. The ACL rule is created with two options. The protocol to filter for an ACL rule is specified by giving the protocol to be used like **icmp, igmp, ip, tcp, udp**. The command specifies a source ip address and source mask for match condition of the ACL rule specified by the **srcip** and **srcmask** parameters. The source layer 4 port match condition for the ACL rule is specified by the *port value* parameter.

<portvalue> uses a single keyword notation and currently has the values of **domain, echo, ftp, ftpdata, http, smtp, snmp, telnet, tftp**, and **www**. Each of these values translates into its equivalent port number, which is used as both the start and end of a port range. The command specifies a destination ip address and destination mask for match condition of the ACL rule specified by the *dstip* and *dstmask* parameters. The command specifies the TOS for an ACL rule depending on a match of precedence or DSCP values using the parameters **tos, tosmask**,

dscp.

Default Setting

None

Command Mode

Global Config

6.13.2.6 no access-list

This command deletes an ACL that is identified by the parameter *<accesslistnumber>* from the system.

Syntax

```
no access-list {<1-99> | <100-199>}
```

Note: The ACL number is an integer from 1 to 199. The range 1 to 99 is for the normal ACL List and 100 to 199 is for the extended ACL List.

Default Setting

None

Command Mode

Global Config

6.13.2.7 ip access-group

This command attaches a specified access-control list to an interface.

Syntax

```
ip access-group <1- 199> in [<1-4294967295>]
```

<1- 199> The identifier of this ACL.

<1-4294967295> The sequence number of this ACL.

Default Setting

None

Command Mode

Global Config, Interface Config

6.14 CoS (Class of Service) Command**6.14.1 Show Commands****6.14.1.1 show queue cos-map**

This command displays the current Dot1p (802.1p) priority mapping to internal traffic classes for a specific interface. The slot/port parameter is optional and is only valid on platforms that support independent per-port class of service mappings. If specified, the 802.1p mapping table of the interface is displayed. If omitted, the most recent global configuration settings are displayed.

Syntax**show queue cos-map <unit/slot/port>**

< unit/slot/port > The interface number.

Default Setting

None

Command Mode

Privileged EXEC, User EXEC

Display Message

The following information is repeated for each user priority.

User Priority The 802.1p user priority value.

Traffic Class The traffic class internal queue identifier to which the user priority value is mapped.

6.14.1.2 show queue ip-precedence-mapping

This command displays the current IP Precedence mapping to internal traffic classes for a specific interface. The slot/port parameter is optional and is only valid on platforms that support

independent per-port class of service mappings. If specified, the IP Precedence mapping table of the interface is displayed. If omitted, the most recent global configuration settings are displayed.

Syntax

```
show queue ip-precedence-mapping <unit/slot/port>
```

< unit/slot/port > The interface number.

Default Setting

None

Command Mode

Privileged EXEC, User EXEC

Display Message

The following information is repeated for each user priority.

IP Precedence The IP Precedence value.

Traffic Class The traffic class internal queue identifier to which the IP Precedence value is mapped.

6.14.1.3 show queue trust

This command displays the current trust mode setting for a specific interface. The unit/slot/port parameter is optional and is only valid on platforms that support independent per-port class of service mappings. If specified, the port trust mode of the interface is displayed. If omitted, the port trust mode of each interface in the system is shown. If the platform does not support independent per-port class of service mappings, the output represents the system-wide port trust mode used for all interfaces.

Syntax

```
show queue trust [<unit/slot/port>]
```

< unit/slot/port > The interface number.

Default Setting

None

Command Mode

Privileged EXEC, User EXEC

Display Message

Class of Service Trust Mode The trust mode of this interface.

Non-IP Traffic Class The traffic class used for non-IP traffic. This is only displayed when the COS trust mode is set to either 'trust ip-dscp' or 'trust ip-precedence'.

Untrusted Traffic Class The traffic class used for all untrusted traffic. This is only displayed when the COS trust mode is set to 'untrusted'.

6.14.1.4 show queue cos-queue

This command displays the class-of-service queue configuration for the specified interface. The unit/slot/port parameter is optional and is only valid on platforms that support independent per-port class of service mappings. If specified, the class-of-service queue configuration of the interface is displayed. If omitted, the most recent global configuration settings are displayed.

Syntax
show queue cos-queue [<unit/slot/port>]

< unit/slot/port > The interface number.

Default Setting

None

Command Mode

Privileged EXEC

Display Message

Interface This displays the slot/port of the interface. If displaying the global configuration, this output line is replaced with a Global Config indication.

Interface Shaping Rate The maximum transmission bandwidth limit for the interface as a whole. It is independent of any per-queue maximum bandwidth value(s) in effect for the interface. This is a configured value.

The following information is repeated for each queue on the interface.

Queue Id An interface supports n queues numbered 0 to (n-1). The specific n value is

platform dependent.

Minimum Bandwidth The minimum transmission bandwidth guarantee for the queue, expressed as a percentage. A value of 0 means bandwidth is not guaranteed and the queue operates using best-effort. This is a configured value.

Scheduler Type Indicates whether this queue is scheduled for transmission using a strict priority or a weighted scheme. This is a configured value.

Queue Mgmt Type The queue depth management technique used for this queue, either tail drop or weighted random early discard (WRED). This is a configured value.

6.14.2 Configuration Commands

6.14.2.1 queue cos-map

This command maps an 802.1p priority to an internal traffic class on a "per-port" basis.

Syntax

```
queue cos-map <0-7> <0-6>  
no queue cos-map
```

< 0-7 > - The range of queue priority is 0 to 7.

< 0-6 > - The range of mapped traffic class is 0 to 6.

no - Reset to the default mapping of the queue priority and the mapped traffic class.

Default Setting

None

Command Mode

Interface Config.

This command maps an 802.1p priority to an internal traffic class for a device.

Syntax

```
queue cos-map all <0-7> <0-6>  
no queue cos-map all
```

< 0-7 > - The range of queue priority is 0 to 7.

< 0-6 > - The range of mapped traffic class is 0 to 6.

no - Reset to the default mapping of the queue priority and the mapped traffic class.

Default Setting

None

Command Mode

Global Config.

6.14.2.2 queue ip-precedence-mapping

This command maps an IP precedence value to an internal traffic class on a "per-port" basis.

Syntax

queue ip-precedence-mapping <0-7> <0-6>
--

no queue ip-precedence-mapping

< 0-7 > - The range of IP precedence is 0 to 7.

< 0-6 > - The range of mapped traffic class is 0 to 6.

no - Reset to the default mapping of the IP precedence and the mapped traffic class.

Default Setting

None

Command Mode

Interface Config.

This command maps an IP precedence value to an internal traffic class for a device.

Syntax

queue ip-precedence-mapping all <0-7> <0-6>
--

no queue ip-precedence-mapping all

< 0-7 > - The range of IP precedence is 0 to 7.

< 0-6 > - The range of mapped traffic class is 0 to 6.

no - Reset to the default mapping of the IP precedence and the mapped traffic class.

Default Setting

None

Command Mode

Global Config.

6.14.2.3 queue trust

This command sets the class of service trust mode of an interface. The mode can be set to trust one of the Dot1p (802.1p), IP Precedence.

Syntax
queue trust {dot1p ip-precedence ip-dscp} no queue trust

no - This command sets the interface mode to untrusted.

Default Setting

None

Command Mode

Interface Config.

This command sets the class of service trust mode for all interfaces. The mode can be set to trust one of the Dot1p (802.1p), IP Precedence.

Syntax

```
queue trust all {dot1p | ip-precedence | ip-dscp}  
no queue trust all
```

no - This command sets the class of service trust mode to untrusted for all interfaces.

Default Setting

None

Command Mode

Global Config.

6.14.2.4 queue cos-queue min-bandwidth

This command specifies the minimum transmission bandwidth guarantee for each interface queue.

Syntax

```
queue cos-queue min-bandwidth <bw-0> <bw-1>    <bw-6>  
no queue cos-queue min-bandwidth
```

<bw-0> <bw-1> <bw-6>- Each Valid range is (0 to 100) in increments of 5 and the total sum is less than or equal to 100.

no - This command restores the default for each queue's minimum bandwidth value.

Default Setting

None

Command Mode

Interface Config.

This command specifies the minimum transmission bandwidth guarantee for each interface queue in the device.

Syntax

```
queue cos-queue min-bandwidth all <bw-0> <bw-1>    <bw-6>  
no queue cos-queue min-bandwidth all
```

<bw-0> <bw-1> <bw-6>- Each Valid range is (0 to 100) in increments of 5 and the total sum is less than or equal to 100.

no - This command restores the default for each queue's minimum bandwidth value in the device.

Default Setting

None

Command Mode

Global Config.

6.14.2.5 queue cos-queue strict

This command activates the strict priority scheduler mode for each specified queue on a "per-port" basis.

Syntax

```
queue cos-queue strict <queue-id-0> [<queue-id-1>    <queue-id-6>]  
no queue cos-queue strict <queue-id-0> [<queue-id-1>    <queue-id-6>]
```

no - This command restores the default weighted scheduler mode for each specified queue on a "per-port" basis.

Default Setting

None

Command Mode

Interface Config.

This command activates the strict priority scheduler mode for each specified queue on a device.

Syntax

```
queue cos-queue strict all <queue-id-0> [<queue-id-1>    <queue-id-6>]  
no queue cos-queue strict all <queue-id-0> [<queue-id-1>    <queue-id-6>]
```

no - This command restores the default weighted scheduler mode for each specified queue on a device.

Default Setting

None

Command Mode

Global Config.

6.14.2.6 queue cos-queue traffic-shape

This command specifies the maximum transmission bandwidth limit for the interface as a whole. Also known as rate shaping, this has the effect of smoothing temporary traffic bursts over time so that the transmitted traffic rate is bounded.

Syntax

queue cos-queue traffic-shape <bw> no queue cos-queue traffic-shape
--

<bw> - Valid range is (0 to 100) in increments 5.

no - This command restores the default shaping rate value.

Default Setting

None

Command Mode

Interface Config.

This command specifies the maximum transmission bandwidth limit for all interfaces. Also known as rate shaping, this has the effect of smoothing temporary traffic bursts over time so that the transmitted traffic rate is bounded.

Syntax

queue cos-queue traffic-shape all <bw> no queue cos-queue traffic-shape all
--

<bw> - Valid range is (0 to 100) in increments 5.

no - This command restores the default shaping rate value for all interfaces.

Default Setting

None

Command Mode

Global Config.

6.15 LLDP (Link Layer Discovery Protocol) Commands

6.15.1 Show Commands

6.15.1.1 show lldp

This command uses to display a summary of the current LLDP configuration.

Syntax
show lldp

Default Setting

None

Command Mode

Privileged Exec

Display Message

Transmit Interval: Shows how frequently the system transmits local data LLDPDUs, in seconds.

Transmit Hold Multiplier: Shows the multiplier on the transmit interval that sets the TTL in local data LLDPDUs.

Re-initialization Delay: Shows the delay before re-initialization, in seconds.

Notification Interval: Shows how frequently the system sends remote data change notifications, in seconds.

6.15.1.2 show lldp interface

This command uses to display a summary of the current LLDP configuration for a specific interface or for all interfaces.

Syntax
show lldp interface {<unit/slot/port> all}

< unit/slot/port> - Configs a specific interface.

Default Setting

None

Command Mode

Privileged Exec

Display Message**Interface:** Shows the interface in a unit/slot/port format.**Link:** Shows whether the link is up or down.**Transmit:** Shows whether the interface transmits LLDPDUs.**Receive:** Shows whether the interface receives LLDPDUs.**Notify:** Shows whether the interface sends remote data change notifications.**TLVs:** Shows whether the interface sends optional TLVs in the LLDPDUs. The TLV codes can be 0 (Port Description), 1 (System Name), 2 (System Description), or 3 (System Capability).**Mgmt:** Shows whether the interface transmits system management address information in the LLDPDUs.**6.15.1.3 show lldp statistics**

This command uses to display the current LLDP traffic and remote table statistics for a specific interface or for all interfaces.

Syntax**show lldp statistics {<unit/slot/port> | all}****<unit/slot/port>** - Configs a specific interface.**Default Setting**

None

Command Mode

Privileged Exec

Display Message**Last Update:** Shows the amount of time since the last update to the remote table in days, hours, minutes, and seconds.**Total Inserts:** Total number of inserts to the remote data table.**Total Deletes:** Total number of deletes from the remote data table.**Total Drops:** Total number of times the complete remote data received was not inserted due to insufficient resources.**Total Ageouts:** Total number of times a complete remote data entry was deleted because the Time to Live interval expired.

The table contains the following column headings:

Interface: Shows the interface in unit/slot/port format.**Transmit Total:** Total number of LLDP packets transmitted on the port.**Receive Total:** Total number of LLDP packets received on the port.

Discards: Total number of LLDP frames discarded on the port for any reason.

Errors: The number of invalid LLDP frames received on the port.

Ageouts: Total number of times a complete remote data entry was deleted for the port because the Time to Live interval expired.

TVL Discards: Shows the number of TLVs discarded

TVL Unknowns: Total number of LLDP TLVs received on the port where the type value is in the reserved range, and not recognized.

6.15.1.4 show lldp remote-device

This command uses to display summary information about remote devices that transmit current LLDP data to the system. You can show information about LLDP remote data received on all ports or on a specific port.

Syntax

show lldp remote-device {<unit/slot/port> all}

<unit/slot/port> - Displays a specific interface.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Local Interface: Identifies the interface that received the LLDPDU from the remote device.

Chassis ID: Shows the ID of the remote device.

Port ID: Shows the port number that transmitted the LLDPDU.

System Name: Shows the system name of the remote device.

6.15.1.5 show lldp remote-device detail

This command uses to display detailed information about remote devices that transmit current LLDP data to an interface on the system.

Syntax

show lldp remote-device detail <unit/slot/port>
--

<unit/slot/port> - Displays a specific interface.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Local Interface: Identifies the interface that received the LLDPDU from the remote device.

Chassis ID Subtype: Shows the type of identification used in the Chassis ID field.

Chassis ID: Identifies the chassis of the remote device.

Port ID Subtype: Identifies the type of port on the remote device.

Port ID: Shows the port number that transmitted the LLDPDU.

System Name: Shows the system name of the remote device.

System Description: Describes the remote system by identifying the system name and versions of hardware, operating system, and networking software supported in the device.

Port Description: Describes the port in an alpha-numeric format. The port description is configurable.

System Capabilities Supported: Indicates the primary function(s) of the device.

System Capabilities Enabled: Shows which of the supported system capabilities are enabled.

Management Address: For each interface on the remote device with an LLDP agent, lists the type of address the remote LLDP agent uses and specifies the address used to obtain information related to the device.

Time To Live: Shows the amount of time (in seconds) the remote device's information received in the LLDPDU should be treated as valid information.

6.15.1.6 show lldp local-device

This command uses to display summary information about the advertised LLDP local data. This command can display summary information or detail for each interface.

Syntax
show lldp local-device {<unit/slot/port> all}

<unit/slot/port> - Displays a specific interface.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: Identifies the interface in a unit/slot/port format.

Port ID: Shows the port ID associated with this interface.

Port Description: Shows the port description associated with the interface.

6.15.1.7 show lldp local-device detail

This command uses to display detailed information about the LLDP data a specific interface transmits.

Syntax

show lldp local-device detail <unit/slot/port>

<unit/slot/port> - Displays a specific interface.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: Identifies the interface that sends the LLDPDU.

Chassis ID Subtype: Shows the type of identification used in the Chassis ID field.

Chassis ID: Identifies the chassis of the local device.

Port ID Subtype: Identifies the type of port on the local device.

Port ID: Shows the port number that transmitted the LLDPDU.

System Name: Shows the system name of the local device.

System Description: Describes the local system by identifying the system name and versions of hardware, operating system, and networking software supported in the device.

Port Description: Describes the port in an alpha-numeric format.

System Capabilities Supported: Indicates the primary function(s) of the device.

System Capabilities Enabled: Shows which of the supported system capabilities are enabled.

Management Address: Lists the type of address and the specific address the local LLDP agent uses to send and receive information.

7 Routing Commands

7.1 Address Resolution Protocol (ARP) Commands

7.1.1 Show Commands

7.1.1.1 show ip arp

This command displays the Address Resolution Protocol (ARP) cache.

Syntax

show ip arp

Default Setting

None

Command Mode

Privileged Exec

Display Message

Age Time: Is the time it takes for an ARP entry to age out. This value was configured into the unit. Age time is measured in seconds.

Response Time: Is the time it takes for an ARP request timeout. This value was configured into the unit. Response time is measured in seconds.

Retries: Is the maximum number of times an ARP request is retried. This value was configured into the unit.

Cache Size: Is the maximum number of entries in the ARP table. This value was configured into the unit.

Dynamic renew mode: Displays whether the ARP component automatically attempts to renew dynamic ARP entries when they aged out.

Total Entry Count Current/Peak: Field listing the total entries in the ARP table and the peak entry count in the ARP table.

Static Entry Count Configured/Active/Max: Field listing configured static entry count, active static entry count, and maximum static entry count in the ARP table.

The following are displayed for each ARP entry.

IP Address: Is the IP address of a device on a subnet attached to an existing routing interface.

MAC Address: Is the hardware MAC address of that device.

Interface: Is the routing unit/slot/port associated with the device ARP entry

Type: Is the type that was configured into the unit. The possible values are Local, Gateway, Dynamic and Static.

Age: This field displays the current age of the ARP entry since last refresh (in hh:mm:ss format).

7.1.1.2 show ip arp brief

This command displays the brief Address Resolution Protocol (ARP) table information.

Syntax

show ip arp brief

Default Setting

None

Command Mode

Privileged Exec

Display Message

Age Time: Is the time it takes for an ARP entry to age out. This value was configured into the unit. Age time is measured in seconds.

Response Time: Is the time it takes for an ARP request timeout. This value was configured into the unit. Response time is measured in seconds.

Retries: Is the maximum number of times an ARP request is retried. This value was configured into the unit.

Cache Size: Is the maximum number of entries in the ARP table. This value was configured into the unit.

Dynamic renew mode: Displays whether the ARP component automatically attempts to renew dynamic ARP entries when they aged out.

Total Entry Count Current/Peak: Field listing the total entries in the ARP table and the peak entry count in the ARP table.

Static Entry Count Configured/Active/Max: Field listing the configured static entry count, active static entry count, and maximum static entry count in the ARP table.

7.1.1.3 show ip arp static

This command displays the static Address Resolution Protocol (ARP) table information.

Syntax

show ip arp static

Default Setting

None

Command Mode

Privileged Exec

Display Message

IP address: Is the IP address of a device on a subnet attached to an existing routing interface.

MAC address: Is the MAC address for that device.

7.1.2 Configuration Commands

7.1.2.1 arp

This command creates an ARP entry. The value for <ipaddress> is the IP address of a device on a subnet attached to an existing routing interface. The value for <macaddress> is a unicast MAC address for that device.

Syntax

arp <ipaddr> <macaddr> no arp <ipaddr> <macaddr>

<ipaddr> - Is the IP address of a device on a subnet attached to an existing routing interface.

<macaddr> - Is a MAC address for that device. The format is 6 two-digit hexadecimal numbers that are separated by colons, for example, 00:06:29:32:81:40.

no - This command deletes an ARP entry.

Default Setting

None

Command Mode

Global Config

7.1.2.2 ip proxy-arp

This command enables proxy ARP on a router interface. Without proxy ARP, a device only responds to an ARP request if the target IP address is an address configured on the interface where the ARP request arrived. With proxy ARP, the device may also respond if the target IP address is reachable. The device only responds if all next hops in its route to the destination are through interfaces other than the interface that received the ARP request.

Syntax

ip proxy-arp no ip proxy-arp

no - This command disables proxy ARP on a router interface.

Default Setting

Enabled

Command Mode

Interface Config

7.1.2.3 arp cachesize

This command configures the maximum number of entries in the ARP cache.

Syntax

```
arp cachesize <256-1920>
no arp cachesize
```

<256-1920> - The range of cache size is 256 to 1920.

no - This command configures the default ARP cache size.

Default Setting

The default cache size is 1920.

Command Mode

Global Config

7.1.2.4 arp dynamicrenew

This command enables ARP component to automatically renew ARP entries of type dynamic when they age out.

Syntax

```
arp dynamicrenew
no arp dynamicrenew
```

no - This command disables ARP component from automatically renewing ARP entries of type dynamic when they age out.

Default Setting

Enabled

Command Mode

Global Config

7.1.2.5 arp purge

This command causes the specified IP address to be removed from the ARP table. Only entries of type dynamic or gateway are affected by this command.

Syntax

arp purge <ipaddr>

<ipaddr> - The IP address to be removed from the ARP table.

Default Setting

None

Command Mode

Privileged Exec

7.1.2.6 arp resptime

This command configures the ARP request response timeout.

Syntax

arp resptime <1-10>

no arp resptime

<1-10> - The range of default response time is 1 to 10 seconds.

no - This command configures the default response timeout time.

Default Setting

The default response time is 1.

Command Mode

Global Config

7.1.2.7 arp retries

This command configures the ARP count of maximum request for retries.

Syntax

arp retries <0-10>

no arp retries

<0-10> - The range of maximum request for retries is 0 to 10.

no - This command configures the default count of maximum request for retries.

Default Setting

The default value is 4.

Command Mode

Global Config

7.1.2.8 arp timeout

This command configures the ARP entry ageout time.

Syntax

```
arp timeout <15-21600>
no arp timeout
```

<15-21600> - Represents the IP ARP entry ageout time in seconds. The range is 15 to 21600 seconds.

no - This command configures the default ageout time for IP ARP entry.

Default Setting

The default value is 1200.

Command Mode

Global Config

7.1.2.9 clear arp-cache

This command causes all ARP entries of type dynamic to be removed from the ARP cache. If the [gateway] parameter is specified, the dynamic entries of type gateway are purged as well.

Syntax

```
clear ip arp-cache [gateway | interface <unit/slot/port>]
```

Default Setting

None

Command Mode

Privileged Exec

7.2 IP Routing Commands**7.2.1 Show Commands****7.2.1.1 show ip brief**

This command displays all the summary information of the IP.

Syntax

```
show ip brief
```

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

Default Time to Live: The computed TTL (Time to Live) of forwarding a packet from the local router to the final destination.

Routing Mode: Show whether the routing mode is enabled or disabled.

IP Forwarding Mode: Disable or enable the forwarding of IP frames.

Maximum Next Hops: The maximum number of hops supported by this switch.

7.2.1.2 show ip interface port

This command displays all pertinent information about the IP interfaces.

Syntax

show ip interface port <unit/slot/port>
--

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

IP Address: Is an IP address representing the subnet configuration of the router interface.

Subnet Mask: Is a mask of the network and host portion of the IP address for the router interface.

Routing Mode: Is the administrative mode of router interface participation. The possible values are enable or disable.

Administrative Mode Is the administrative mode of the specified interface. The possible values of this field are enable or disable. This value was configured into the unit.

Forward Net Directed Broadcasts: Displays whether forwarding of network-directed broadcasts is enabled or disabled.

Active State: Displays whether the interface is active or inactive. An interface is considered active if its link is up and it is in forwarding state.

Link Speed Data Rate: Is an integer representing the physical link data rate of the specified interface. This is measured in Megabits per second (Mbps).

MAC Address: Is the physical address of the specified interface.

Encapsulation Type: Is the encapsulation type for the specified interface.

IP Mtu: Is the Maximum Transmission Unit size of the IP packet.

7.2.1.3 show ip interface brief

This command displays summary information about IP configuration settings for all ports in the router.

Syntax

show ip interface brief

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

Interface: Valid unit, slot, and port number separated by forward slashes.

IP Address: The IP address of the routing interface.

IP Mask: The IP mask of the routing interface.

Netdir Bcast: Indicates if IP forwards net-directed broadcasts on this interface. Possible values are Enable or Disable.

MultiCast Fwd: Indicates the multicast forwarding administrative mode on the interface. Possible values are Enable or Disable.

7.2.1.4 show ip route

This command displays the entire route table.

Syntax

show ip route

Default Setting

None

Command Mode

Privileged Exec

Display Message

Total Number of Routes: The total number of routes.

for each next hop

Network Address: Is an IP address identifying the network on the specified interface.

Subnet Mask: Is a mask of the network and host portion of the IP address for the router interface.

Protocol: Tells which protocol added the specified route. The possibilities are: local, static, OSPF, or RIP

Next Hop Intf: The outgoing router interface to use when forwarding traffic to the next destination.

Next Hop IP Address: The outgoing router IP address to use when forwarding traffic to the next router (if any) in the path toward the destination.

7.2.1.5 show ip route bestroutes

This command displays router route table information for the best routes.

Syntax

show ip route bestroutes

Default Setting

None

Command Mode

Privileged Exec

Display Message

Total Number of Routes: The total number of routes.

Network Address: Is an IP route prefix for the destination.

Subnet Mask: Is a mask of the network and host portion of the IP address for the router interface.

Protocol: Tells which protocol added the specified route. The possibilities are: local, static, OSPF, or RIP.

for each next hop

Next Hop Intf: The outgoing router interface to use when forwarding traffic to the next destination.

Next Hop IP Address: The outgoing router IP address to use when forwarding traffic to the next router (if any) in the path toward the destination.

7.2.1.6 show ip route entry

This command displays the router route entry information.

Syntax

```
show ip route entry <networkaddress>
```

<networkaddress> - Is a valid network address identifying the network on the specified interface.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Network Address: Is a valid network address identifying the network on the specified interface.

Subnet Mask: Is a mask of the network and host portion of the IP address for the attached network.

Protocol: Tells which protocol added the specified route. The possibilities are: local, static, OSPF, or RIP.

Total Number of Routes: The total number of routes.

for each next hop

Next Hop Intf: The outgoing router interface to use when forwarding traffic to the next destination.

Next Hop IP Address: The outgoing router IP address to use when forwarding traffic to the next router (if any) in the path toward the destination.

Preference: The preference value that is used for this route entry.

Metric: Specifies the metric for this route entry.

7.2.1.7 show ip route precedence

This command displays detailed information about the route preferences. Route preferences are used in determining the best route. Lower router preference values are preferred over higher router preference values.

Syntax

```
show ip route preferences
```

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

Local: This field displays the local route preference value.

Static: This field displays the static route preference value.

OSPF Intra: This field displays the OSPF intra route preference value.

OSPF Inter: This field displays the OSPF inter route preference value.

OSPF Ext T1: This field displays the OSPF Type-1 route preference value.

OSPF Ext T2: This field displays the OSPF Type-2 route preference value.

RIP: This field displays the RIP route preference value.

7.2.1.8 show ip traffic

This command displays IP statistical information. Refer to RFC 1213 for more information about the fields that are displayed.

Syntax

```
show ip traffic
```

Default Setting

None

Command Mode

Privileged Exec, User Exec

7.2.2 Configuration Commands**7.2.2.1 routing**

This command enables routing for an interface.

Syntax

```
routing  
no routing
```

no - Disable routing for an interface.

Default Setting

Enabled

Command Mode

Interface Config

7.2.2.2 ip routing

This command enables the IP Router Admin Mode for the master switch.

Syntax

```
ip routing
no ip routing
```

no - Disable the IP Router Admin Mode for the master switch.

Default Setting

Enabled

Command Mode

Global Config

7.2.2.3 ip address

This command configures an IP address on an interface. The IP address may be a secondary IP address.

Syntax

```
ip address <ipaddr> <subnet-mask> [secondary]
no ip address <ipaddr> <subnet-mask> [secondary]
```

<ipaddr> - IP address of the interface.

<subnet-mask> - Subnet mask of the interface.

[secondary] - It is a secondary IP address.

no - Delete an IP address from an interface.

Default Setting

None

Command Mode

Interface Config

7.2.2.4 ip route

This command configures a static route.

Syntax

```
ip route <networkaddr> <subnetmask> [ <nexthopip> [<1-255 >] ]  
no ip route <networkaddr> <subnetmask> [ { <nexthopip> | <1-255 > } ]
```

<ipaddr> - A valid IP address .

<subnetmask> - A valid subnet mask.

<nexthopip> - IP address of the next hop router.

<1-255> - The precedence value of this route. The range is 1 to 255.

no - delete all next hops to a destination static route. If the optional <nextHopRtr> parameter is designated, the next hop is deleted and if the optional precedence value is designated, the precedence value of the static route is reset to its default value 1.

Default Setting

None

Command Mode

Global Config

7.2.2.5 ip route default-next-hop

This command configures the default route.

Syntax

```
ip route default-next-hop <nexthopip> [1-255]
```

<nexthopip> - IP address of the next hop router.

<1-255> - Precedence value of this route.

Default Setting

None

Command Mode

Global Config

7.2.2.6 ip route precedence

This command sets the default precedence for static routes. Lower route preference values are preferred when determining the best route. The "ip route" and "ip default-next-hop" commands

allow you to optionally set the precedence of an individual static route. The default precedence is used when no precedence is specified in these commands. Changing the default precedence does not update the precedence of existing static routes, even if they were assigned the original default precedence. The new default precedence will only be applied to static routes created after invoking the "ip route precedence" command.

Syntax**ip route precedence <1-255>**

<1-255> - Default precedence value of static routes. The range is 1 to 255.

Default Setting

The default precedence value is 1.

Command Mode

Global Config

7.2.2.7 ip forwarding

This command enables forwarding of IP frames.

Syntax**ip forwarding**
no ip forwarding

no - Disable forwarding of IP frames.

Default Setting

Enabled

Command Mode

Global Config

7.2.2.8 ip directed-broadcast

This command enables the forwarding of network-directed broadcasts. When enabled, network directed broadcasts are forwarded. When disabled they are dropped.

Syntax

ip directed-broadcast no ip directed-broadcast

no - Drop network directed broadcast packets.

Default Setting

Enabled

Command Mode

Interface Config

7.2.2.9 ip mtu

This command sets the IP Maximum Transmission Unit (MTU) on a routing interface. The IP MTU is the size of the largest IP packet that can be transmitted on the interface without fragmentation.

Syntax

ip mtu <68-1500> no ip mtu <68-1500>

<68-1500> - The IP MTU on a routing interface. The range is 68 to 1500.

no - Reset the ip mtu to the default value.

Default Setting

The default value is 1500.

Command Mode

Interface Config

7.2.2.10 encapsulation

This command configures the link layer encapsulation type for the packet.

Syntax

encapsulation {ethernet snap}
--

ethernet - The link layer encapsulation type is ethernet.

snap - The link layer encapsulation type is SNAP.

Default Setting

The default value is ethernet.

Command Mode

Interface Config

Restrictions

Routed frames are always Ethernet encapsulated when a frame is routed to a VLAN.

7.3 Open Shortest Path First (OSPF) Commands

7.3.1 Show Commands

7.3.1.1 show ip ospf

This command displays information relevant to the OSPF router

Syntax
show ip ospf

Default Setting

None

Command Mode

Privileged Exec

Display Messages

Router ID Is a 32 bit integer in dotted decimal format identifying the router.

OSPF Admin Mode The administrative mode of OSPF in the router.

ASBR Mode Reflects whether the ASBR mode is enabled or disabled. Enable implies that the router is an autonomous system border router. Router automatically becomes an ASBR when it is configured to redistribute routes learned from other protocol. The possible values for the ASBR status is enabled (if the router is configured to re-distribute routes learnt by other protocols) or disabled (if the router is not configured for the same).

RFC 1583 Compatibility Reflects whether 1583 compatibility is enabled or disabled. This is a configured value.

ABR Status Reflects the whether or not the router is an OSPF Area Border Router.

Exit Overflow Interval The number of seconds that, after entering OverflowState, a router will attempt to leave OverflowState.

External LSA count The number of external (LS type 5) link-state advertisements in the link-state database.

External LSA Checksum A number which represents the sum of the LS checksums of external link-state advertisements contained in the link-state database.

New LSAs Originated The number of new link-state advertisements that have been originated.

LSAs Received The number of link-state advertisements received determined to be new instantiations.

External LSDB Limit The maximum number of non-default AS-external-LSAs entries that can be stored in the link-state database.

Default-metric RDefault value for redistributed routes.

Default Route Advertise Enable or Disable Default Route Advertise.

Always Sets the router advertise 0.0.0.0/0.0.0.0 when set to "True".

Metric Specifies the metric of the default route. The valid values are (0 to 16777215).

Metric Type Metric type of the default route. The valid values are External Type 1 and External Type 2.

Maximum Paths Maximum number of paths that OSPF can report for a given destination.

7.3.1.2 show ip ospf area

This command displays information relevant to the OSPF router

Syntax

show ip ospf area <areaid>

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

AreaID Is the area id of the requested OSPF area.

Aging Interval Is a number representing the aging interval for this area.

External Routing Is a number representing the external routing capabilities for this area.

Spf Runs Is the number of times that the intra-area route table has been calculated using this area's link-state database.

Area Border Router Count The total number of area border routers reachable within this area.

Area LSA Count Total number of link-state advertisements in this area's link-state database, excluding AS external LSA's.

Area LSA Checksum A number representing the area LSA checksum for the specified AreaID excluding the external (LS type 5) link-state advertisements.

Stub Mode Represents whether the specified Area is a stub area or not. The possible values are enabled and disabled. This is a configured value.

Import Summary LSAs Enable to import LSAs into stub area.

7.3.1.3 show ip ospf database

This command displays the link state database. This command takes no options. The information will only be displayed if OSPF is enabled.

Syntax

show ip ospf database

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

Router ID Is a 32 bit dotted decimal number representing the LSDB interface.

Area ID Is the IP address identifying the router ID.

LSA Type The types are: router, network, ipnet sum, asbr sum, as external, group member, tmp 1, tmp 2, opaque link, opaque area.

LS ID Is a number that "uniquely identifies an LSA that a router originates from all other self originated LSA's of the same LS type."

Age Is a number representing the age of the link state advertisement in seconds.

Sequence Is a number that represents which LSA is more recent.

Checksum Is to total number LSA checksum.

Options This is an integer. It indicates that the LSA receives special handling during routing calculations.

7.3.1.4 show ip ospf interface

This command displays the information for the IFO object or virtual interface tables.

Syntax

show ip ospf interface <unit/slot/port>
--

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

IP Address Represents the IP address for the specified interface. This is a configured value.

Subnet Mask Is a mask of the network and host portion of the IP address for the OSPF interface. This value was configured into the unit. This is a configured value.

OSPF Admin Mode States whether OSPF is enabled or disabled on a router interface. This is a configured value.

OSPF Area ID Represents the OSPF Area Id for the specified interface. This is a configured value.

Router Priority A number representing the OSPF Priority for the specified interface. This is a configured value.

Retransmit Interval A number representing the OSPF Retransmit Interval for the specified interface. This is a configured value.

Hello Interval A number representing the OSPF Hello Interval for the specified interface. This is a configured value.

Dead Interval A number representing the OSPF Dead Interval for the specified interface. This is a configured value.

LSA Ack Interval A number representing the OSPF LSA Acknowledgement Interval for the specified interface.

IfTransit Delay Interval A number representing the OSPF Transit Delay for the specified interface. This is a configured value.

Authentication Type The OSPF Authentication Type for the specified interface are: none, simple, and encrypt. This is a configured value.

Metric Cost Is the cost of the ospf interface. This is a configured value.

OSPF Mtu-ignore Disables OSPF MTU mismatch detection on receiving packets. Default value is Disable.

7.3.1.5 show ip ospf interface brief

This command displays brief information for the IFO object or virtual interface tables.

Syntax
show ip ospf interface brief

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

Interface Valid unit, slot and port number separated by forward slashes.

Admin Mode States whether OSPF is enabled or disabled on a router interface. This is a configured value.

Area ID Represents the OSPF Area Id for the specified interface. This is a configured value.

Router Priority A number representing the OSPF Priority for the specified interface. This is a configured value.

Hello Interval A number representing the OSPF Hello Interval for the specified interface. This is a configured value.

Dead Interval A number representing the OSPF Dead Interval for the specified interface. This is a configured value.

Retrax Interval A number representing the OSPF Retransmit Interval for the specified interface. This is a configured value.

Retrax Delay A number representing the OSPF Transit Delay for the specified interface. This is a configured value.

LSAAck Interval A number representing the OSPF LSA Acknowledgement Interval for the specified interface.

7.3.1.6 show ip ospf interface stats

This command displays the statistics for a specific interface.

Syntax
show ip ospf interface stats <unit/slot/port>

<unit/slot/port> - Interface number.

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

OSPF Area ID The area id of this OSPF interface.

Spf Runs The number of times that the intra-area route table has been calculated using this area's link-state database.

Area Border Router Count The total number of area border routers reachable within this area. This is initially zero, and is calculated in each SPF pass.

AS Border Router Count The total number of Autonomous System border routers reachable within this area.

Area LSA Count The total number of link-state advertisements in this area's link-state database, excluding AS External LSAs.

IP Address The IP address associated with this OSPF interface.

OSPF Interface Events The number of times the specified OSPF interface has changed its state, or an error has occurred.

Virtual Events The number of state changes or errors that occurred on this virtual link.

Neighbor Events The number of times this neighbor relationship has changed state, or an error has occurred.

External LSA Count The number of external (LS type 5) link-state advertisements in the link-state database.

LSAs Received The number of LSAs received.

Originate New LSAs The number of LSAs originated.

7.3.1.7 show ip ospf neighbor

This command displays the OSPF neighbor table list. When a particular neighbor ID is specified, detailed information about a neighbor is given. The information will only be displayed if OSPF is enabled and the interface has a neighbor.

Syntax

```
show ip ospf neighbor <ipaddr> <unit/slot/port>
```

<ipaddr> - IP address of the neighbor.
<unit/slot/port> - Interface number.

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

Interface Is the interface number.

Router Id Is a 4-digit dotted-decimal number identifying neighbor router.

Options An integer value that indicates the optional OSPF capabilities supported by the neighbor. The neighbor's optional OSPF capabilities are also listed in its Hello packets. This enables received Hello Packets to be rejected (i.e., neighbor relationships will not even start to form) if there is a mismatch in certain crucial OSPF capabilities.

Router Priority Displays the OSPF priority for the specified interface. The priority of an interface is a priority integer from 0 to 255. A value of '0' indicates that the router is not eligible to become the designated router on this network.

State The types are:

Down- initial state of the neighbor conversation - no recent information has been received from the neighbor.

Attempt - no recent information has been received from the neighbor but a more concerted effort should be made to contact the neighbor.

Init - an Hello packet has recently been seen from the neighbor, but bi-directional communication has not yet been established.

2 way - communication between the two routers is bi-directional.

Exchange start - the first step in creating an adjacency between the two neighboring routers, the goal is to decide which router is the master and to decide upon the initial DD sequence number.

Exchange - the router is describing its entire link state database by sending Database Description packets to the neighbor.

Loading - Link State Request packets are sent to the neighbor asking for the more recent LSAs that have been discovered (but not yet received) in the Exchange state.

Full - the neighboring routers are fully adjacent and they will now appear in router-LSAs and network-LSAs.

Events The number of times this neighbor relationship has changed state, or an error has occurred.

Permanence This variable displays the status of the entry, either dynamic or permanent. This refers to how the neighbor became known.

Hellos Suppressed This indicates whether Hellos are being suppressed to the neighbor. The types are enabled and disabled.

Retransmission Queue Length Is an integer representing the current length of the retransmission queue of the specified neighbor router Id of the specified interface.

7.3.1.8 show ip ospf neighbor brief

This command displays the OSPF neighbor table list. When a particular neighbor ID is specified, detailed information about a neighbor is given. The information will only be displayed if OSPF is enabled.

Syntax
show ip ospf neighbor brief {<unit/slot/port> all}

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

Router ID A 4 digit dotted decimal number representing the neighbor interface.

IP Address An IP address representing the neighbor interface.

Neighbor Interface Index Is a unit/slot/port identifying the neighbor interface index.

State The types are:

Down- initial state of the neighbor conversation - no recent information has been received from the neighbor.

Attempt - no recent information has been received from the neighbor but a more concerted effort should be made to contact the neighbor.

Init - an Hello packet has recently been seen from the neighbor, but bi-directional communication has not yet been established.

2 way - communication between the two routers is bi-directional.

Exchange start - the first step in creating an adjacency between the two neighboring routers, the goal is to decide which router is the master and to decide upon the initial DD sequence number.

Exchange - the router is describing its entire link state database by sending Database Description packets to the neighbor.

Loading - Link State Request packets are sent to the neighbor asking for the more recent LSAs that have been discovered (but not yet received) in the Exchange state.

Full - the neighboring routers are fully adjacent and they will now appear in router-LSAs and network-LSAs.

7.3.1.9 show ip ospf range

This command displays information about the area ranges for the specified <areaid>. The

<areaid> identifies the OSPF area whose ranges are being displayed.

Syntax

```
show ip ospf range <areaid>
```

<areaid> - The area id of the requested OSPF area

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

Area ID The area id of the requested OSPF area.

IP Address An IP Address which represents this area range.

Subnet Mask A valid subnet mask for this area range.

Lsdb Type The type of link advertisement associated with this area range.

Advertisement The status of the advertisement. Advertisement has two possible settings: enabled or disabled.

7.3.1.10 show ip ospf stub table

This command displays the OSPF stub table. The information will only be displayed if OSPF is initialized on the switch.

Syntax

```
show ip ospf stub table
```

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

Area ID Is a 32-bit identifier for the created stub area.

Type of Service Is the type of service associated with the stub metric. FASTPATH only supports Normal TOS.

Metric Val The metric value is applied based on the TOS. It defaults to the least metric of the type of service among the interfaces to other areas. The OSPF cost for a route is a function of the metric value.

Metric Type Is the type of metric advertised as the default route.

Import Summary LSA Controls the import of summary LSAs into stub areas.

7.3.1.11 show ip ospf virtual-link

This command displays the OSPF Virtual Interface information for a specific area and neighbor.

Syntax

show ip ospf virtual-link <areaid> <neighbor>
--

<areaid> - Area ID.

<neighbor> - Neighbor's router ID.

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages

Area ID The area id of the requested OSPF area.

Neighbor Router ID The input neighbor Router ID.

Hello Interval The configured hello interval for the OSPF virtual interface.

Dead Interval The configured dead interval for the OSPF virtual interface.

Iftransit Delay Interval The configured transit delay for the OSPF virtual interface.

Retransmit Interval The configured retransmit interval for the OSPF virtual interface.

State The OSPF Interface States are: down, loopback, waiting, point-to-point, designated router, and backup designated router. This is the state of the OSPF interface.

Metric The metric value.

Neighbor State The neighbor state.

Authentication Type The configured authentication type of the OSPF virtual interface.

7.3.1.12 show ip ospf virtual-link brief

This command displays the OSPF Virtual Interface information for all areas in the system.

Syntax

```
show ip ospf virtual-link brief
```

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Messages**Area Id** Is the area id of the requested OSPF area.**Neighbor** Is the neighbor interface of the OSPF virtual interface.**Hello Interval** Is the configured hello interval for the OSPF virtual interface.**Dead Interval** Is the configured dead interval for the OSPF virtual interface.**Retransmit Interval** Is the configured retransmit interval for the OSPF virtual interface.**Transit Delay** Is the configured transit delay for the OSPF virtual interface.

7.3.2 Configuration Commands

7.3.2.1 enable

This command resets the default administrative mode of OSPF in the router to active.

Syntax

```
enable
```

```
no enable
```

<no> - This command sets the administrative mode of OSPF in the router to inactive.

Default Setting

Enabled

Command Mode

Router OSPF Config

7.3.2.2 no area

This command removes an OSPF area.

Syntax

no area <areaid>

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.3 ip ospf

This command enables OSPF on a router interface.

Syntax

ip ospf no ip ospf

<no> - This command disables OSPF on a router interface.

Default Setting

Disabled

Command Mode

Interface Config

7.3.2.4 1583compatibility

This command enables OSPF 1583 compatibility. Note that if all OSPF routers in the routing domain are capable of operating according to RFC 2328, OSPF 1583 compatibility mode should be disabled.

Syntax

```
1583compatibility
no 1583compatibility
```

<no> - This command disables OSPF 1583 compatibility.

Default Setting

Enabled

Command Mode

Router OSPF Config

7.3.2.5 area default-cost

This command configures the monetary default cost for the stub area.

Syntax

```
area <areaid> default-cost <1-16777215>
```

<areaid> - Area ID

<1-16777215> - The default cost value. The range is 1 to 16777215.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.6 area nssa

This command configures the specified areaid to function as an NSSA.

Syntax

```
area <areaid> nssa
no area <areaid> nssa
```

<areaid> - Area ID.

<no> - This command disables nssa from the specified area id.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.7 area nssa default-info-originate

This command configures the metric value and type for the default route advertised into the NSSA.

Syntax

```
area <areaid> nssa default-info-originate [<1-16777215>] [{comparable | non-comparable}]
```

<areaid> - Area ID.

<1-16777215> - The metric of the default route. The range is 1 to 16777215.

comparable - It's NSSA-External 1.

non-comparable - It's NSSA-External 2.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.8 area nssa no-redistribute

This command configures the NSSA ABR so that learned external routes will not be redistributed to the NSSA.

Syntax

```
area <areaid> nssa no-redistribute
```

<areaid> - Area ID.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.9 area nssa no-summary

This command configures the NSSA so that summary LSAs are not advertised into the NSSA

Syntax

```
area <areaid> nssa no- summary
```

<areaid> - Area ID.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.10 area nssa translator-role

This command configures the translator role of the NSSA.

Syntax

```
area <areaid> nssa translator-role {always | candidate}
```

<areaid> - Area ID.

always - A value of *always* will cause the router to assume the role of the translator when it becomes a border router.

candidate - a value of *candidate* will cause the router to participate in the translator election process when it attains border router status.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.11 area nssa translator-stab-intv

This command configures the translator stability interval of the NSSA. The <stabilityinterval> is the period of time that an elected translator continues to perform its duties after it determines that its translator status has been deposed by another router.

Syntax

```
area <areaid> nssa translator-stab-intv <0-3600>
```

<areaid> - Area ID.

<0-3600> - The range is 0 to 3600.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.12 area range

This command creates a specified area range for a specified NSSA.

Syntax

```
area <areaid> range <ipaddr> <subnetmask> {summarylink | nssaexternallink}  
[advertise | not-advertise]
```

```
no area <areaid> range <ipaddr> <subnetmask>
```

<areaid> - Area ID.

<ipaddr> - IP Address.

<subnetmask> - The subnetmask.

summarylink - The lsdb type. The value is summarylink or nssaexternallink

nssaexternallink - The lsdb type. The value is summarylink or nssaexternallink

advertise - Allow advertising the specified area range.

not-advertise - Disallow advertising the specified area range.

<no> - This command deletes a specified area range.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.13 area stub

This command creates a stub area for the specified area ID. A stub area is characterized by the fact that AS External LSAs are not propagated into the area. Removing AS External LSAs and Summary LSAs can significantly reduce the link state database of routers within the stub area.

Syntax

```
area <areaid> stub
no area <areaid> stub
```

<areaid> - Area ID.

<no> - This command deletes a stub area for the specified area ID.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.14 area stub summarylsa

This command configures the Summary LSA mode for the stub area identified by <areaid>. The Summary LSA mode is configured as enabled.

Syntax

```
area <areaid> stub summarylsa
no area <areaid> stub summarylsa
```

<areaid> - Area ID.

<no> - This command configures the default Summary LSA mode for the specified stub area.

Default Setting

Disabled

Command Mode

Router OSPF Config

7.3.2.15 area virtual-link authentication

This command configures the authentication type and key for the OSPF virtual interface identified by <areaid> and <neighborid>.

Syntax

<pre>area <areaid> virtual-link <neighborid> authentication [{none {simple <key>} {encrypt <key> <0-255>}}]</pre>

<pre>no area <areaid> virtual-link <neighborid> authentication</pre>
--

<areaid> - Area ID.

<neighbor> - Router ID of the neighbor.

none - No authentication.

<key> - The [key] is composed of standard displayable, non-control keystrokes from a standard 101/102-key keyboard. The authentication key must be 8 bytes or less if the authentication type is simple. If the type is encrypt, the key may be up to 256 bytes. Unauthenticated interfaces do not need an authentication key.

<0-255> - Specifies the Key ID. The range is 0 to 255.

<no> - This command configures the default authentication type for the OSPF virtual interface identified by <areaid> and <neighborid>.

Default Setting

The default authentication type is none.

Command Mode

Router OSPF Config

7.3.2.16 area virtual-link dead-interval

This command configures the dead interval for the OSPF virtual interface on the virtual interface identified by <areaid> and <neighborid>.

Syntax

area <areaid> virtual-link <neighborid> dead-interval <1-65535> no area <areaid> virtual-link <neighborid> dead-interval

<areaid> - Area ID.

<neighbor> - Router ID of the neighbor.

<1-65535> - The range of the dead interval is 1 to 65535.

<no> - This command deletes the OSPF virtual interface from the given interface, identified by <areaid> and <neighborid>.

Default Setting

The default value of dead interval is 40 seconds.

Command Mode

Router OSPF Config

7.3.2.17 area virtual-link hello-interval

This command configures the hello interval for the OSPF virtual interface on the interface identified by <areaid> and <neighborid>.

Syntax

area <areaid> virtual-link <neighborid> hello-interval <1-65535> no area <areaid> virtual-link <neighborid> hello-interval

<areaid> - Area ID.

<neighborid> - Router ID of the neighbor.

<1-65535> - The range of the hello interval is 1 to 65535.

<no> - This command configures the default hello interval for the OSPF virtual interface on the interface identified by <areaid> and <neighborid>.

Default Setting

The default value of hello interval is 10 seconds.

Command Mode

Router OSPF Config

7.3.2.18 area virtual-link retransmit-interval

This command configures the retransmit interval for the OSPF virtual interface on the interface identified by <areaid> and <neighborid>.

Syntax

area <areaid> virtual-link <neighborid> retransmit-interval <0-3600> no area <areaid> virtual-link <neighborid> retransmit-interval
--

<areaid> - Area ID.

<neighborid> - Router ID of the neighbor.

<0-3600> - The range of the retransmit interval is 0 to 3600.

<no> - This command configures the default retransmit interval for the OSPF virtual interface on the interface identified by <areaid> and <neighborid>.

Default Setting

The default value of retransmit interval is 5 seconds.

Command Mode

Router OSPF Config

7.3.2.19 area virtual-link transmit-delay

This command configures the transmit delay for the OSPF virtual interface on the virtual interface identified by <areaid> and <neighborid>.

Syntax

area <areaid> virtual-link <neighborid> transmit-delay <0-3600> no area <areaid> virtual-link <neighborid> transmit-delay
--

<areaid> - Area ID.

<neighbor> - Router ID of the neighbor.

<0-3600> - The range of the transmit delay is 0 to 3600.

<no> - This command configures the default transmit delay for the OSPF virtual interface on the virtual interface identified by <areaid> and <neighborid>.

Default Setting

The default value of hello interval is 1 second.

Command Mode

Router OSPF Config

7.3.2.20 default-information originate

This command is used to control the advertisement of default routes.

Syntax
default-information originate [always] [metric <1-16777215>] [metric-type {1 2}] no default-information originate [metric] [metric-type]

[always] - Sets the router advertise 0.0.0.0/0.0.0.0.

metric - The range of the metric is 1 to 16777215.

metric type - The value of metric type is type 1 or type 2.

<no> - This command configures the default advertisement of default routes.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.21 default-metric

This command is used to set a default for the metric of distributed routes.

Syntax

```
default-metric <1-16777215>  
no default-metric
```

<1-16777215> - The range of default metric is 1 to 16777215.

<no> - This command configures the default advertisement of default routes.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.22 distance ospf

This command sets the route preference value of OSPF in the router. Lower route preference values are preferred when determining the best route. The type of OSPF can be intra, inter, type-1, or type-2. The OSPF specification (RFC 2328) requires that preferences must be given to the routes learned via OSPF in the following order: intra < inter < type-1 < type-2.

Syntax

```
distance ospf {intra | inter | type1 | type2} [<preference>]  
no distance ospf {intra | inter | type1 | type2}
```

<preference> - The range for intra is 1 to 252. The range for inter is 2 to 253. The range for type1 is 3 to 254. The range for type2 is 4 to 255.

<no> - This command sets the default route preference value of OSPF in the router.

Default Setting

The default preference value for intra is 8. The default preference value for inter is 10. The default preference value for type 1 is 13. The default preference value for type 2 is 150.

Command Mode

Router OSPF Config

7.3.2.23 distribute-list out

This command is used to specify the access list to filter routes received from the source protocol.

Syntax

```
distribute-list <1-199> out {rip | static | connected}  
no distribute-list <1-199> out {rip | static | connected}
```

<1-199> - The range of default list id is 1 to 199.

<no> - This command is used to specify the access list to filter routes received from the source protocol.

Default Setting

None

Command Mode

Router OSPF Config

7.3.2.24 exit-overflow-interval

This command configures the exit overflow interval for OSPF. It describes the number of seconds after entering Overflow state that a router will wait before attempting to leave the Overflow State. This allows the router to again originate non-default AS-external-LSAs. When set to 0, the router will not leave Overflow State until restarted.

Syntax

```
exit-overflow-interval <0-2147483647>  
no exit-overflow-interval
```

<0-2147483647> - The range of exit overflow interval for OSPF is 0 to 2147483674.

<no> - This command configures the default exit overflow interval for OSPF.

Default Setting

The default value of exit overflow interval for OSPF is 0.

Command Mode

Router OSPF Config

7.3.2.25 external-lsdb-limit

This command configures the external LSDB limit for OSPF. If the value is -1, then there is no limit. When the number of non-default AS-external-LSAs in a router's link-state database reaches the external LSDB limit, the router enters overflow state. The router never holds more than the external LSDB limit non-default AS-external-LSAs in its database. The external LSDB limit MUST be set identically in all routers attached to the OSPF backbone and/or any regular OSPF area.

Syntax

external-lsdb-limit <-1-2147483647> no external-lsdb-limit

<-1-2147483647> - The range of external LSDB limit for OSPF is -1 to 2147483647.

<no> - This command configures the default external LSDB limit for OSPF.

Default Setting

The default value of external LSDB limit for OSPF is -1.

Command Mode

Router OSPF Config

7.3.2.26 ip ospf areaid

This command sets the OSPF area to which the specified router interface belongs. Assigning an area id, which does not exist on an interface, causes the area to be created with default values.

Syntax

ip ospf areaid <areaid>

< areaid > - It is an IP address, formatted as a 4-digit dotted-decimal number that uniquely identifies the area to which the interface connects.

Default Setting

None

Command Mode

Interface Config

7.3.2.27 ip ospf authentication

This command sets the OSPF Authentication Type and Key for the specified interface. The value of <type> is either none, simple or encrypt. If the type is encrypt a <keyid> in the range of 0 and 255 must be specified.

Syntax

ip ospf authentication {none | {simple <key>} | {encrypt <key> <keyid>}}
no ip ospf authentication

< key > - It is composed of standard displayable, non-control keystrokes from a Standard 101/102-key keyboard. The authentication key must be 8 bytes or less if the authentication type is simple. If the type is encrypt, the key may be up to 256 bytes.
<keyid> - The range is 0 to 255.

Default Setting

The default authentication type is none. The default password key is not configured. Unauthenticated interfaces do not need an authentication. The default keyid is not configured.

Command Mode

Interface Config

7.3.2.28 ip ospf cost

This command configures the cost on an OSPF interface.

Syntax

<pre>ip ospf cost <1-65535> no ip ospf cost</pre>

< 1-65535 > - The range of the cost is 1 to 65535.

<no> - This command configures the default cost on an OSPF interface.

Default Setting

The default cost value is 10.

Command Mode

Interface Config

7.3.2.29 ip ospf dead-interval

This command sets the OSPF dead interval for the specified interface.

Syntax

<pre>ip ospf dead-interval <1-2147483647> no ip ospf dead-interval</pre>
--

< 1-2147483647 > - It is a valid positive integer, which represents the length of time in seconds that a router's Hello packets have not been seen before its neighbor routers declare that the router is down. The value for the length of time must be the same for all routers attached to a common network. This value should be some multiple of the Hello Interval (i.e. 4).

<no> - This command sets the default OSPF dead interval for the specified interface.

Default Setting

The default dead interval is 40 seconds.

Command Mode

Interface Config

7.3.2.30 ip ospf hello -interval

This command sets the OSPF hello interval for the specified interface.

Syntax

```
ip ospf hello-interval <1-65535>
no ip ospf hello-interval
```

< 1-65535 > - Is a valid positive integer, which represents the length of time in seconds. The value for the length of time must be the same for all routers attached to a network.
<no> - This command sets the default OSPF hello interval for the specified interface.

Default Setting

The default hello interval is 10 seconds.

Command Mode

Interface Config

7.3.2.31 ip ospf priority

This command sets the OSPF priority for the specified router interface

Syntax

```
ip ospf priority <0-255>
no ip ospf priority
```

< 0-255 > - The range of the priority value is 0 to 255. A value of '0' indicates that the

router is not eligible to become the designated router on this network.
<no> - This command sets the default OSPF priority for the specified interface.

Default Setting

The default priority value is 1. It is the highest router priority.

Command Mode

Interface Config

7.3.2.32 ip ospf retransmit-interval

This command sets the OSPF retransmit Interval for the specified interface. The retransmit interval is specified in seconds.

Syntax

ip ospf retransmit-interval <0-3600> no ip ospf retransmit-interval
--

< 0-3600 > - The value is the number of seconds between link-state advertisement retransmissions for adjacencies belonging to this router interface. This value is also used when retransmitting database and link-state request packets.

<no> - This command sets the default OSPF retransmit Interval for the specified interface.

Default Setting

The default retransmit interval is 5 seconds.

Command Mode

Interface Config

7.3.2.33 ip ospf transmit-delay

This command sets the OSPF Transmit Delay for the specified interface. The transmit delay is specified in seconds. In addition, it sets the estimated number of seconds it takes to transmit a

link state update packet over this interface.

Syntax

```
ip ospf transmit-delay <1-3600>  
no ip ospf transmit-delay
```

< 1-3600 > - The range of transmit delay is 1 to 3600.

<no> - This command sets the default OSPF Transit Delay for the specified interface.

Default Setting

The default transmit delay is 1 second.

Command Mode

Interface Config

7.3.2.34 ip ospf mtu-ignore

This command disables OSPF maximum transmission unit (MTU) mismatch detection. OSPF Database Description packets specify the size of the largest IP packet that can be sent without fragmentation on the interface. When a router receives a Database Description packet, it examines the MTU advertised by the neighbor. By default, if the MTU is larger than the router can accept, the Database Description packet is rejected and the OSPF adjacency is not established.

Syntax

```
ip ospf mtu-ignore  
no ip ospf mtu-ignore
```

<no> - This command enables the OSPF MTU mismatch detection.

Default Setting

Enabled.

Command Mode

Interface Config

7.3.2.35 router-id

This command sets a 4-digit dotted-decimal number uniquely identifying the router ospf id.

Syntax

```
router-id <ipaddress>
```

< ipaddress > - IP Address.

Default Setting

None.

Command Mode

Router OSPF Config

7.3.2.36 redistribute

This command configures OSPF protocol to redistribute routes from the specified source protocol/routers.

Syntax

```
redistribute {rip | static | connected} [metric <0-16777215>] [metric-type {1 | 2}] [tag  
<0-4294967295>] [subnets]
```

```
no redistribute {rip | static | connected} [metric] [metric-type] [tag] [subnets]
```

<0-16777215> - The range of metric is 0 to 16777215.

<0-4294967295> - The range of tag is 0 to 4294967295.

Default Setting

The default value of metric is unspecified. The default value of metric type is 2. The default value of tag is 0.

Command Mode

Router OSPF Config

7.3.2.37 maximum-paths

This command sets the number of paths that OSPF can report for a given destination where <maxpaths> is platform dependent.

Syntax

maximum-paths <1-1>

no maximum-paths

< 1-1 > - The maximum number of paths that OSPF can report for a given destination. The range of the value is 1 to 1.

Default Setting

The default value is 1.

Command Mode

Router OSPF Config.

7.4 Bootp/DHCP Relay Commands**7.4.1 show bootpdhcprelay**

This command displays the BootP/DHCP Relay information.

Syntax

show bootpdhcprelay

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

Maximum Hop Count: Is the maximum allowable relay agent hops.

Minimum Wait Time (Seconds) Is the minimum wait time.

Admin Mode Represents whether relaying of requests is enabled or disabled.

Server IP Address Is the IP Address for the BootP/DHCP Relay server.

Circuit Id Option Mode Is the DHCP circuit Id option which may be enabled or disabled.

Requests Received Is the number of requests received.

Requests Relayed Is the number of requests relayed.

Packets Discarded Is the number of packets discarded.

7.4.2 bootpdhcprelay cidoptmode

This command enables the circuit ID option mode for BootP/DHCP Relay on the system.

Syntax

```
bootpdhcprelay cidoptmode
no bootpdhcprelay cidoptmode
```

Default Setting

Disabled

Command Mode

Global Config

7.4.3 bootpdhcprelay enable

This command enables the forwarding of relay requests for BootP/DHCP Relay on the system.

Syntax

```
bootpdhcprelay enable
no bootpdhcprelay enable
```

no - Disable the forwarding of relay requests for BootP/DHCP Relay on the system.

Default Setting

Disabled

Command Mode

Global Config

7.4.4 bootpdhcprelay maxhopcount

This command configures the maximum allowable relay agent hops for BootP/DHCP Relay on the system.

Syntax**bootpdhcprelay maxhopcount <1-16>****no bootpdhcprelay maxhopcount**

<count> - The range of maximum hop count is 1 to 16.

no - Set the maximum hop count to 4.

Default Setting

The default value is 4.

Command Mode

Global Config

7.4.5 bootpdhcprelay minwaittime

This command configures the minimum wait time in seconds for BootP/DHCP Relay on the system. When the BOOTP relay agent receives a BOOTREQUEST message, it may use the seconds-since-client-began-booting field of the request as a factor in deciding whether to relay the request or not.

Syntax**bootpdhcprelay minwaittime <0-100>****no bootpdhcprelay minwaittime**

<seconds> - The range of minimum wait time is 0 to 100.

no - Set the minimum wait time to 0 seconds.

Default Setting

The default value is 0.

Command Mode

Global Config

7.4.6 bootpdhcprelay serverip

This command configures the server IP Address for BootP/DHCP Relay on the system.

Syntax

```
bootpdhcprelay serverip <ipaddr>  
no bootpdhcprelay serverip
```

<ipaddr> - The IP address of the BootP/DHCP server.

no - Clear the IP address of the BootP/DHCP server.

Default Setting

None

Command Mode

Global Config

7.4.7 ip dhcp restart

Submit a BootP or DHCP client request.

Syntax

```
ip dhcp restart
```

Default Setting

None

Command Mode

Global Config

7.4.8 ip dhcp client-identifier

This commands specifies the DHCP client identifier for the switch.

Syntax

```
ip dhcp client-identifier {text <text> | hex <hex>}
```

<text> - A text string which length is 1 to 15.

<hex> - A hex string which format is XX:XX:XX:XX:XX:XX (X is 0-9, A-F).

Default Setting

The default value for client-identifier is a text string "Korenix".

Command Mode

Global Config

7.5 Domain Name Server Relay Commands

7.5.1 Show Commands

7.5.1.1 show hosts

This command displays the static host name-to-address mapping table.

Syntax

show hosts

Default Setting

None

Command Mode

Privileged Exec

Display Message

Domain Name List: Domain Name.

IP Address: IP address of the Host.

7.5.1.2 show dns

This command displays the configuration of the DNS server.

Syntax

show dns

Default Setting

None

Command Mode

Privileged Exec

Display Message

Domain Lookup Status: Enable or disable the IP Domain Naming System (DNS)-based host name-to-address translation function.

Default Domain Name: The default domain name that will be used for querying the IP address of a host.

Domain Name List: A list of domain names that will be used for querying the IP address of a host.

Name Server List: A list of domain name servers.

Request: Number of the DNS query packets been sent.

Response: Number of the DNS response packets been received.

7.5.1.3 show dns cache

This command displays all entries in the DNS cache table.

Syntax

show dns cache

Default Setting

None

Command Mode

Privileged Exec

Display Message

Domain Name List: Domain Name

IP Address: IP address of the corresponding domain name.

TTL: Time in seconds that this entry will remain in the DNS cache table

Flag: Indicates if this entry is reliable. A value of 8 is not as reliable as a value of 10.

7.5.2 Configuration Commands

7.5.2.1 ip hosts

This command creates a static entry in the DNS table that maps a host name to an IP address.

Syntax

<pre>ip host <name> <ipaddr> no ip host <name></pre>
--

<name> - Host name.

<ipaddr> - IP address of the host.

<no> - Remove the corresponding name to IP address mapping entry.

Default Setting

None

Command Mode

Privileged Exec

7.5.2.2 clear hosts

This command clears the entire static host name-to-address mapping table.

Syntax

<pre>clear hosts</pre>

Default Setting

None

Command Mode

Privileged Exec

7.5.2.3 ip domain-name

This command defines the default domain name to be appended to incomplete host names (i.e., host names passed from a client are not formatted with dotted notation).

Syntax

ip domain-name <name> no ip domain-name <name>

<name> - Default domain name used to complete unqualified host names. Do not include the initial period that separates an unqualified name from the domain name. (Range: 1-64 characters)

Default Setting

None

Command Mode

Privileged Exec

7.5.2.4 ip domain-list

This command defines the domain name that can be appended to incomplete host names (i.e., host names passed from a client are not formatted with dotted notation). The domain name table can contain maximum 6 entries.

Syntax

ip domain-list <name> no ip domain-list <name>

<name> - Default domain name used to complete unqualified host names. Do not include the initial period that separates an unqualified name from the domain name. (Range: 1-64 characters)

Note - When an incomplete host name is received by the DNS server on this switch, it will work through the domain name list, append each domain name in the list to the host name, and check with the specified name servers for a match. If there is no domain name list, the domain name specified with the "*ip domain-name*" command is used. If there is a domain name list, the default domain name is not used.

Default Setting

None

Command Mode

Privileged Exec

7.5.2.5 ip name-server

This command specifies the address of one or more domain name servers to use for name-to-address resolution. There are maximum 6 entries in the Domain Name Server Table.

Syntax

```
ip name-server <ipaddr>  
no ip name-server <ipaddr>
```

< ipaddr > - IP address of the Domain Name Servers.

<no> - Remove the corresponding Domain Name Server entry from the table.

Note - The listed name servers are queried in the specified sequence until a response is received, or the end of the list is reached with no response.

Default Setting

None

Command Mode

Privileged Exec

7.5.2.6 ip domain-lookup

This command enables the IP Domain Naming System (DNS)-based host name-to-address translation.

Syntax

```
ip domain-lookup  
no ip domain-lookup
```

<no> - This command disables the IP Domain Naming System (DNS)-based host name-to-address translation.

Default Setting

None

Command Mode

Privileged Exec

7.5.2.7 clear domain-list

This command clears all entries in the domain name list table.

Syntax

clear domain-list

Default Setting

None

Command Mode

Privileged Exec

7.5.2.8 clear dns

This command sets the DNS configuration to default value.

Syntax

clear dns

Default Setting

None

Command Mode

Privileged Exec

7.5.2.9 clear dns cache

This command clears all entries in the DNS cache table.

Syntax

clear dns cache

Default Setting

None

Command Mode

Privileged Exec

7.5.2.10 clear dns counter

This command clears the statistics of all entries in the DNS cache table.

Syntax

clear dns cache

Default Setting

None

Command Mode

Privileged Exec

7.6 Routing Information Protocol (RIP) Commands

7.6.1 Show Commands

7.6.1.1 show ip rip

This command displays information relevant to the RIP router.

Syntax

<code>show ip rip</code>

Default Setting

None

Command Mode

Privileged Exec

Display Message

RIP Admin Mode: Select enable or disable from the pulldown menu. If you select enable RIP will be enabled for the switch. The default is disabled.

Split Horizon Mode: Select none, simple or poison reverse from the pulldown menu. Split horizon is a technique for avoiding problems caused by including routes in updates sent to the router from which the route was originally learned. The options are: None - no special processing for this case. Simple - a route will not be included in updates sent to the router from which it was learned. Poisoned reverse - a route will be included in updates sent to the router from which it was learned, but the metric will be set to infinity. The default is simple

Auto Summary Mode: Select enable or disable from the pulldown menu. If you select enable groups of adjacent routes will be summarized into single entries, in order to reduce the total number of entries. The default is enabled.

Host Routes Accept Mode: Select enable or disable from the pulldown menu. If you select enable the router will be accept host routes. The default is enabled.

Global Route Changes: The number of route changes made to the IP Route Database by RIP. This does not include the refresh of a route's age.

Global queries: The number of responses sent to RIP queries from other systems. Default Metric Sets a default for the metric of redistributed routes. This field displays the default metric if one has already been set or blank if not configured earlier. The valid values are (1 to 15).

Default Metric: Sets a default for the metric of redistributed routes. This field displays the default metric if one has already been set or blank if not configured earlier. The valid values are (1 to 15).

Default Route Advertise: The default route.

7.6.1.2 show ip rip interface

This command displays information related to a particular RIP interface.

Syntax

```
show ip rip interface <unit/slot/port>
```

< unit/slot/port > - Interface number

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: Valid unit, slot and port number separated by forward slashes. This is a configured value.

IP Address: The IP source address used by the specified RIP interface. This is a configured value.

Send version: The RIP version(s) used when sending updates on the specified interface. The types are none, RIP-1, RIP-1c, and RIP-2. This is a configured value.

Receive version: The RIP version(s) allowed when receiving updates from the specified interface. The types are none, RIP-1, RIP-2, Both. This is a configured value.

RIP Admin Mode: RIP administrative mode of router RIP operation; enable, disable it. This is a configured value.

Link State: Indicates whether the RIP interface is up or down. This is a configured value.

Authentication Type: The RIP Authentication Type for the specified interface. The types are none, simple, and encrypt. This is a configured value.

Authentication Key: 16 alpha-numeric characters for authentication key when uses simple or encrypt authentication.

Authentication Key ID: It is a Key ID when uses MD5 encryption for RIP authentication.

Default Metric: A number which represents the metric used for default routes in RIP updates originated on the specified interface. This is a configured value. The following information will be invalid if the link state is down.

Bad Packets Received: The number of RIP response packets received by the RIP process which were subsequently discarded for any reason.

Bad Routes Received: The number of routes contained in valid RIP packets that were ignored for any reason.

Updates Sent: The number of triggered RIP updates actually sent on this interface.

7.6.1.3 show ip rip interface brief

This command displays general information for each RIP interface. For this command to display successful results routing must be enabled per interface (i.e. ip rip).

Syntax

show ip rip interface brief

Default Setting

None

Command Mode

Privileged Exec

Display Message**Interfacet:** Valid unit, slot and port number separated by forward slashes.**IP Address:** The IP source address used by the specified RIP interface.**Send Version:** The RIP version(s) used when sending updates on the specified interface. The types are none, RIP-1, RIP-1c, RIP-2.**Receive Version:** The RIP version(s) allowed when receiving updates from the specified interface. The types are none, RIP-1, RIP-2, Both**RIP Mode:** RIP administrative mode of router RIP operation; enable, disable it.**Link State:** The mode of the interface (up or down).

7.6.2 Configuration Commands

7.6.2.1 enable rip

This command resets the default administrative mode of RIP in the router (active).

Syntax
enable no enable

no - This command sets the administrative mode of RIP in the router to inactive.

Default Setting

Enable

Command Mode

Router RIP Config

7.6.2.2 ip rip

This command enables RIP on a router interface.

Syntax

```
ip rip
no ip rip
```

no - This command disables RIP on a router interface.

Default Setting

Disabled

Command Mode

Interface Config

7.6.2.3 auto-summary

This command enables the RIP auto-summarization mode.

Syntax

```
auto-summary
no auto-summary
```

no - This command disables the RIP auto-summarization mode.

Default Setting

Disable

Command Mode

Router RIP Config

7.6.2.4 default-information originate

This command is used to set the advertisement of default routes.

Syntax

```
default-information originate
no default-information originate
```

no - This command is used to cancel the advertisement of default routes.

Default Setting

Not configured

Command Mode

Router RIP Config

7.6.2.5 default-metric

This command is used to set a default for the metric of distributed routes.

Syntax

```
default-metric <1-15>
no default-metric
```

<1 - 15> - a value for default-metric.

no - This command is used to reset the default metric of distributed routes to its default value.

Default Setting

Not configured

Command Mode

Router RIP Config

7.6.2.6 distance rip

This command sets the route preference value of RIP in the router. Lower route preference values are preferred when determining the best route.

Syntax

```
distance rip <1-255>  
no distance rip
```

<1 - 255> - the value for distance.

no - This command sets the default route preference value of RIP in the router.

Default Setting

15

Command Mode

Router RIP Config

7.6.2.7 hostrouteaccept

This command enables the RIP hostroutesaccept mode.

Syntax

```
hostrouteaccept  
no hostrouteaccept
```

no - This command disables the RIP hostroutesaccept mode.

Default Setting

Enable

Command Mode

Router RIP Config

7.6.2.8 split-horizon

This command sets the RIP split horizon mode. **None mode** will not use RIP split horizon mode. **Simple mode** will be that a route is not advertised on the interface over which it is

learned. **Poison mode** will be that routes learned over this interface should be re-advertised on the interface with a metric of infinity (16).

Syntax

```
split-horizon {none | simple | poison}
```

```
no split-horizon
```

none - This command sets without using RIP split horizon mode.

simple - This command sets to use simple split horizon mode.

poison - This command sets to use poison reverse mode.

no - This command cancel to set the RIP split horizon mode and sets none mode.

Default Setting

Simple

Command Mode

Router RIP Config

7.6.2.9 distribute-list

This command is used to specify the access list to filter routes received from the source protocol. Source protocols have OSPF, Static, and Connected.

Syntax

```
distribute-list <1-199> out {ospf | static | connected}
```

```
no distribute-list <1-199> out {ospf | static | connected}
```

<1 - 199> - Access List ID value. The Access List filters the routes to be redistributed by the source protocol.

no - This command is used to cancel the access list to filter routes received from the source protocol.

Default Setting

0

Command Mode

Router RIP Config

7.6.2.10 redistribute

This command configures RIP protocol to redistribute routes from the specified source protocol/routers. There are five possible match options. When you submit the command `redistribute ospf match <matchtype>` the match-type or types specified are added to any match types presently being redistributed. Internal routes are redistributed by default. Source protocols have OSPF, Static, and Connected. Match types will have internal, external 1, external 2, nssa-external 1, and nssa-external 2.

Syntax**Format for OSPF as source protocol:**

```
redistribute ospf [metric <1-15>] [match [internal] [external 1] [external 2]
[nssa-external 1] [nssa-external 2]]
```

Format for other source protocols:

```
redistribute {static | connected} [metric <1-15>]
```

```
no redistribute {ospf | static | connected} [metric] [match [internal] [external 1]
[external 2] [nssa-external 1] [nssa-external 2]]
```

<1 - 15> - a value for metric.

no - This command de-configures RIP protocol to redistribute routes from the specified source protocol/routers.

Default Setting

Metric - not-configured
Match - internal

Command Mode

Router RIP Config

7.6.2.11 ip rip authentication

This command sets the RIP Version 2 Authentication Type and Key for the specified interface. The value of <type> is either **none**, **simple**, or **encrypt**.

The value for authentication key [key] must be 16 bytes or less. The [key] is composed of standard displayable, non-control keystrokes from a Standard 101/102-key keyboard. If the value of <type> is encrypt, a keyid in the range of 0 and 255 must be specified.

Syntax

```
ip rip authentication {none | {simple <key>} | {encrypt <key> <keyid>}}  
no ip rip authentication
```

none - This command uses no authentication.

simple - This command uses simple authentication for RIP authentication .

encrypt - This command uses MD5 encryption for RIP authentication.

<key> - 16 alpha-numeric characters to be used for authentication key.

<keyid> - a value in the range of 0 – 255 to be used for MD5 encryption.

no - This command sets the default RIP Version 2 Authentication Type.

Default Setting

None

Command Mode

Interface Config

7.6.2.12 ip rip receive version

This command configures the interface to allow RIP control packets of the specified version(s) to be received.

The value for <mode> is one of: **rip1** to receive only RIP version 1 formatted packets, **rip2** for RIP version 2, **both** to receive packets from either format, or **none** to not allow any RIP control packets to be received

Syntax

```
ip rip receive version {rip1 | rip2 | both | none}  
no ip rip receive version
```

no - This command configures the interface to allow RIP control packets of the default version(s) to be received.

Default Setting

Both

Command Mode

Interface Config

7.6.2.13 ip rip send version

This command configures the interface to allow RIP control packets of the specified version to be sent.

The value for <mode> is one of: **rip1** to broadcast RIP version 1 formatted packets, **rip1c** (RIP version 1 compatibility mode) which sends RIP version 2 formatted packets via broadcast, **rip2** for sending RIP version 2 using multicast, or **none** to not allow any RIP control packets to be sent.

Syntax**ip rip send version {rip1 | rip1c | rip2 | none}****no ip rip send version**

no - This command configures the interface to allow RIP control packets of the default version to be sent.

Default Setting

Rip2

Command Mode

Interface Config

7.7 Router Discovery Protocol Commands**7.7.1 show ip irdp**

This commands displays the router discovery information for all interfaces, or a specified interface.

Syntax**show ip irdp {unit/slot/port | all}**

<unit/slot/port> - Show router discovery information for the specified interface.

<all> - Show router discovery information for all interfaces.

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

Ad Mode Displays the advertise mode which indicates whether router discovery is enabled or disabled on this interface.

Advertise Address: Addresses to be used to advertise the router for the interface.

Max Int Displays the maximum advertise interval which is the maximum time allowed between sending router advertisements from the interface in seconds.

Min Int Displays the minimum advertise interval which is the minimum time allowed between sending router advertisements from the interface in seconds.

Hold Time Displays advertise holdtime which is the value of the holdtime field of the router advertisement sent from the interface in seconds.

Preferences Displays the preference of the address as a default router address, relative to other router addresses on the same subnet.

7.7.2 ip irdp

This command enables Router Discovery on an interface.

Syntax

ip irdp

no ip irdp

<no> - Disable Router Discovery on an interface.

Default Setting

Disabled

Command Mode

Interface Config

7.7.3 ip irdp broadcast

This command configures the address to be used to advertise the router for the interface.

Syntax

ip irdp broadcast no ip irdp broadcast

broadcast - The address used is 255.255.255.255.

no - The address used is 224.0.0.1.

Default Setting

The default address is 224.0.0.1

Command Mode

Interface Config

7.7.4 ip irdp holdtime

This commands configures the value, in seconds, of the holdtime field of the router advertisement sent from this interface.

Syntax

ip irdp holdtime < maxadvertinterval-9000 > no ip irdp holdtime
--

< maxadvertinterval-9000 > The range is the maxadvertinterval to 9000 seconds.

no - This command configures the default value, in seconds, of the holdtime field of the router advertisement sent from this interface.

Default Setting

The default value is 3* maxadvertinterval (600) =1800.

Command Mode

Global Config

7.7.5 ip irdp maxadvertinterval

This commands configures the maximum time, in seconds, allowed between sending router advertisements from the interface.

Syntax

ip irdp maxadvertinterval < minadvertinterval-1800 > no ip irdp maxadvertinterval
--

< minadvertinterval-1800 > - The range is 4 to 1800 seconds.

no - This command configures the default maximum time, in seconds.

Default Setting

The default value is 600.

Command Mode

Global Config

7.7.6 ip irdp minadvertinterval

This command configures the minimum time, in seconds, allowed between sending router advertisements from the interface.

Syntax

ip irdp minadvertinterval < 3-maxadvertinterval>

no ip irdp minadvertinterval

< 3-maxadvertinterval> - The range is 3 to maxadvertinterval seconds.

no - This command sets the minimum time to 450.

Default Setting

The default value is 450.

Command Mode

Global Config

7.7.7 ip irdp preference

This command configures the preferability of the address as a default router address, relative to other router addresses on the same subnet.

Syntax

ip irdp preference < -2147483648-2147483647>

no ip irdp preference

< -2147483648-2147483647 > - The range is -2147483648 to 2147483647.

no - This command sets the preference to 0.

Default Setting

The default value is 0.

Command Mode

Global Config

7.8 VLAN Routing Commands

7.8.1 show ip vlan

This command displays the VLAN routing information for all VLANs with routing enabled in the system.

Syntax

show ip vlan

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

MAC Address used by Routing VLANs Is the MAC Address associated with the internal bridgerouter interface (IBRI). The same MAC Address is used by all VLAN routing interfaces. It will be displayed above the per-VLAN information.

VLAN ID Is the identifier of the VLAN.

Logical Interface Indicates the logical unit/slot/port associated with the VLAN routing interface.

IP Address Displays the IP Address associated with this VLAN.

Subnet Mask Indicates the subnet mask that is associated with this VLAN.

7.8.2 vlan routing

This command creates routing on a VLAN.

Syntax

vlan routing <vlanid> no vlan routing <vlanid>

<vlanid> - The range is 1 to 3965.

no - Delete routing on a VLAN.

Default Setting

None

Command Mode

VLAN Database

7.9 Virtual Router Redundancy Protocol (VRRP) Commands

7.9.1 Show Commands

7.9.1.1 show ip vrrp

This command displays whether VRRP functionality is enabled or disabled. It also displays some global parameters which are required for monitoring.

Syntax

show ip vrrp

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

Admin Mode Displays the administrative mode for VRRP functionality on the switch.

Router Checksum Errors Represents the total number of VRRP packets received with an invalid VRRP checksum value.

Router Version Errors Represents the total number of VRRP packets received with Unknown or unsupported version number.

Router VRID Errors Represents the total number of VRRP packets received with invalid VRID for this virtual router.

7.9.1.2 show ip vrrp brief

This command displays information about each virtual router configured on the switch.

Syntax

```
show ip vrrp brief
```

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

Interface Valid unit, slot and port number separated by forward slashes.

VRID Represents the router ID of the virtual router.

IP Address Is the IP Address that was configured on the virtual router

Mode Represents whether the virtual router is enabled or disabled.

State Represents the state (Master/backup) of the virtual router.

7.9.1.3 show ip vrrp interface

This command displays all configuration information of a virtual router configured on a specific interface. Note that the information will be displayed only when the IP address of the specific interface is configured.

Syntax

```
show ip vrrp interface <unit/slot/port> [ <vrid>]
```

<unit/slot/port> - Valid unit, slot and port number separated by forward slashes.

<vrid> - Virtual router ID.

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

VRID Represents the router ID of the virtual router.

Primary IP Address This field represents the configured IP Address for the Virtual router.

VMAC address Represents the VMAC address of the specified router.

Authentication type Represents the authentication type for the specific virtual router.

Priority Represents the priority value for the specific virtual router.

Advertisement interval Represents the advertisement interval for the specific virtual router.

Pre-Empt Mode Is the preemption mode configured on the specified virtual router.

Administrative Mode Represents the status (Enable or Disable) of the specific router.
State Represents the state (Master/backup) of the specific virtual router

7.9.1.4 show ip vrrp interface stats

This command displays the statistical information about each virtual router configured on the switch.

Syntax

show ip vrrp interface stats <unit/slot/port> [<vrid>]
--

<unit/slot/port> - Valid unit, slot and port number separated by forward slashes.

<vrid> - Virtual router ID.

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

VRID Represents the router ID of the virtual router.

Uptime Is the time that the virtual router has been up, in days, hours, minutes and seconds.

Protocol Represents the protocol configured on the interface.

State Transitioned to Master Represents the total number of times virtual router state has changed to MASTER.

Advertisement Received Represents the total number of VRRP advertisements received by this virtual router.

Advertisement Interval Errors Represents the total number of VRRP advertisements received for which advertisement interval is different than the configured value for this virtual router.

Authentication Failure Represents the total number of VRRP packets received that don't pass the authentication check.

IP TTL errors Represents the total number of VRRP packets received by the virtual router with IP TTL (time to live) not equal to 255.

Zero Priority Packets Received Represents the total number of VRRP packets received by virtual router with a priority of '0'.

Zero Priority Packets Sent Represents the total number of VRRP packets sent by the virtual router with a priority of '0'.

Invalid Type Packets Received Represents the total number of VRRP packets received by the virtual router with invalid 'type' field.

Address List Errors Represents the total number of VRRP packets received for which address list does not match the locally configured list for the virtual router.

Invalid Authentication Type Represents the total number of VRRP packets received with unknown authentication type.

Authentication Type Mismatch Represents the total number of VRRP advertisements received for which 'auth type' not equal to locally configured one for this virtual router.

Packet Length Errors Represents the total number of VRRP packets received with packet length less than length of VRRP header.

7.9.2 Configuration Commands

7.9.2.1 ip vrrp

This command enables the administrative mode of VRRP in the router.

Syntax

<code>ip vrrp</code> <code>no ip vrrp</code>

Default Setting

Disabled

Command Mode

Global Config

This command sets the virtual router ID on an interface for Virtual Router configuration in the router.

Syntax

<code>ip vrrp <1-255></code> <code>no ip vrrp <1-255></code>

<1-255> - The range of virtual router ID is 1 to 255.

<no> - This command removes all VRRP configuration details of the virtual router configured on a specific interface.

Default Setting

None

Command Mode

Interface Config

7.9.2.2 ip vrrp ip

This commands also designates the configured virtual router IP address as a secondary IP address on an interface.

Syntax

```
ip vrrp <1-255> ip <addr> [secondary]  
no ip vrrp <1-255> ip <addr> [secondary]
```

<1-255> - The range of virtual router ID is 1 to 255.

<addr> - Secondary IP address of the router ID.

<no> - This command removes all VRRP configuration details of the virtual router configured on a specific interface.

Default Setting

None

Command Mode

Interface Config

7.9.2.3 ip vrrp mode

This command enables the virtual router configured on the specified interface. Enabling the status field starts a virtual router.

Syntax

```
ip vrrp <1-255> mode  
no ip vrrp <1-255> mode
```

<1-255> - The range of virtual router ID is 1 to 255.

<no> - Disable the virtual router configured on the specified interface. Disabling the status field stops a virtual router.

Default Setting

Disabled

Command Mode

Interface Config

7.9.2.4 ip vrrp authentication

This command sets the authorization details value for the virtual router configured on a specified interface.

Syntax

```
ip vrrp <1-255> authentication <key>  
no ip vrrp <1-255> authentication
```

<1-255> - The range of virtual router ID is 1 to 255.

<key> - A text password used for authentication.

<no> - This command sets the default authorization details value for the virtual router configured on a specified interface.

Default Setting

no authentication

Command Mode

Interface Config

7.9.2.5 ip vrrp preempt

This command sets the preemption mode value for the virtual router configured on a specified interface.

Syntax

```
ip vrrp <1-255> preempt  
no ip vrrp <1-255> preempt
```

<1-255> - The range of virtual router ID is 1 to 255.

<no> - This command sets the default preemption mode value for the virtual router configured on a specified interface.

Default Setting

Enabled

Command Mode

Interface Config

7.9.2.6 ip vrrp priority

This command sets the priority value for the virtual router configured on a specified interface.

Syntax

ip vrrp <1-255> priority <1-255> no ip vrrp <1-255> priority

<1-255> - The range of virtual router ID is 1 to 255.

<1-254> - The range of priority is 1 to 255.

<no> - This command sets the default priority value for the virtual router configured on a specified interface.

Default Setting

The default priority value is 100.

Command Mode

Interface Config

7.9.2.7 ip vrrp timers advertise

This command sets the advertisement value for a virtual router in seconds.

Syntax

ip vrrp <1-255> timers advertise <1-255> ip vrrp <1-255> timers advertise
--

<1-255> - The range of virtual router ID is 1 to 255.

< 1-255 > - The range of advertisement interval is 1 to 255.

<no> - This command sets the default advertisement value for a virtual router.

Default Setting

The default value of advertisement interval is 1.

Command Mode

Interface Config

8 IP Multicast Commands

8.1 Distance Vector Multicast Routing Protocol (DVMRP) Commands

This section provides a detailed explanation of the DVMRP commands. The commands are divided into the following different groups:

Show commands are used to display device settings, statistics and other information. Configuration commands are used to configure features and options of the switch. For every configuration command there is a show command that will display the configuration setting.

8.1.1 Show Commands

8.1.1.1 show ip dvmrp

This command displays the system-wide information for DVMRP

Syntax
show ip dvmrp

Default Setting

None

Command Mode

Privileged Exec

User EXEC

Admin Mode This field indicates whether DVMRP is enabled or disabled. This is a configured value.

Display Message

Admin Mode Enable or disable DVMRP function.

Version This field indicates the version of DVMRP being used.

Total Number of Routes This field indicates the number of routes in the DVMRP routing table.

Reachable Routes This field indicates the number of entries in the routing table with non-infinitemetrics. The following fields are displayed for each interface.

Unit/Slot/Port Valid unit, slot and port number separated by forward slashes.

Interface Mode This field indicates the mode of this interface. Possible values are Enabled and Disabled.

State This field indicates the current state of DVMRP on this interface. Possible values are Operational or Non-Operational.

8.1.1.2 show ip dvmrp interface

This command displays the interface information for DVMRP on the specified interface.

Syntax

```
show ip dvmrp interface <unit/slot/port>
```

Default Setting

None

Command Mode

Privileged Exec
User EXEC

Display Message

Interface Mode This field indicates whether DVMRP is enabled or disabled on the specified interface. This is a configured value.

Interface Metric This field indicates the metric of this interface. This is a configured value.

Local Address This is the IP Address of the interface.

This Field is displayed only when DVMRP is operational on the interface.

Generation ID This is the Generation ID value for the interface. This is used by the neighboring routers to detect that the DVMRP table should be resent.

The following fields are displayed only if DVMRP is enabled on this interface.

Received Bad Packets This is the number of invalid packets received.

Received Bad Routes This is the number of invalid routes received.

Sent Routes This is the number of routes that have been sent on this interface.

8.1.1.3 show ip dvmrp neighbor

This command displays the neighbor information for DVMRP.

Syntax

```
show ip dvmrp neighbor
```

Default Setting

None

Command Mode

Privileged Exec
User EXEC

Display Message

IfIndex This field displays the value of the interface used to reach the neighbor.

Nbr IP Addr This field indicates the IP Address of the DVMRP neighbor for which this entry contains information.

State This field displays the state of the neighboring router. The possible value for this field are ACTIVE or DOWN.

Up Time This field indicates the time since this neighboring router was learned.

Expiry Time This field indicates the time remaining for the neighbor to age out. This field is not

applicable if the State is DOWN.

Generation ID This is the Generation ID value for the neighbor.

Major Version This shows the major version of DVMRP protocol of neighbor.

Minor Version This shows the minor version of DVMRP protocol of neighbor.

Capabilities This shows the capabilities of neighbor.

Received Routes This shows the number of routes received from the neighbor.

Rcvd Bad Pkts This field displays the number of invalid packets received from this neighbor.

Rcvd Bad Routes This field displays the number of correct packets received with invalid routes.

8.1.1.4 show ip dvmrp nexthop

This command displays the next hop information on outgoing interfaces for routing multicast datagrams.

Syntax

show ip dvmrp nexthop

Default Setting

None

Command Mode

Privileged Exec

User EXEC

Display Message

Source IP This field displays the sources for which this entry specifies a next hop on an outgoing interface.

Source Mask This field displays the IP Mask for the sources for which this entry specifies a next hop on an outgoing interface.

Next Hop Interface This field displays the interface in unit/slot/port format for the outgoing interface for this next hop.

Type This field states whether the network is a LEAF or a BRANCH.

8.1.1.5 show ip dvmrp prune

This command displays the table listing the router's upstream prune information.

Syntax

show ip dvmrp prune

Default Setting

None

Command Mode

Privileged Exec

User EXEC

Display Message

Group IP This field identifies the multicast Address that is pruned.

Source IP This field displays the IP Address of the source that has pruned.

Source Mask This field displays the network Mask for the prune source. It should be all 1s or both the prune source and prune mask must match.

Expiry Time (secs) This field indicates the expiry time in seconds. This is the time remaining for this prune to age out.

8.1.1.6 show ip dvmrp route

This command displays the multicast routing information for DVMRP.

Syntax

show ip dvmrp route

Default Setting

None

Command Mode

Privileged Exec

User EXEC

Display Message

Source Address This field displays the multicast address of the source group.

Source Mask This field displays the IP Mask for the source group.

Upstream Neighbor This field indicates the IP Address of the neighbor which is the source for the packets for a specified multicast address.

Interface This field displays the interface used to receive the packets sent by the sources.

Metric This field displays the distance in hops to the source subnet. This field has a different meaning than the Interface Metric field.

Expiry Time(secs) This field indicates the expiry time in seconds. This is the time remaining for this route to age out.

Up Time(secs) This field indicates the time when a specified route was learnt, in seconds.

8.1.2 Configuration Commands

8.1.2.1 ip dvmrp

This command sets administrative mode of DVMRP in the router to active. IGMP must be enabled before DVMRP can be enabled.

Syntax

ip dvmrp

no ip dvmrp

no - This command sets administrative mode of DVMRP in the router to inactive. IGMP must be enabled before DVMRP can be enabled.

Default Setting

Disabled

Command Mode

Global Config

8.1.2.2 ip dvmrp metric

This command configures the metric for an interface. This value is used in the DVMRP messages as the cost to reach this network.

Syntax
ip dvmrp metric <value> no ip dvmrp metric <value>

<value> - This field has a range of 1 to 63.

no - This command resets the metric for an interface to the default value. This value is used in the DVMRP messages as the cost to reach this network.

Default Setting

1

Command Mode

Interface Config

8.2 Internet Group Management Protocol (IGMP) Commands

This section provides a detailed explanation of the IGMP commands. The commands are divided into the following different groups:

Show commands are used to display device settings, statistics and other information.

Configuration commands are used to configure features and options of the switch. For every configuration command there is a show command that will display the configuration setting.

8.2.1 Show Commands

8.2.1.1 show ip igmp

This command displays the system-wide IGMP information.

Syntax

```
show ip igmp
```

Default Setting

None

Command Mode

Privileged Exec
User EXEC

Display Message

IGMP Admin Mode This field displays the administrative status of IGMP. This is a configured value.

Interface Valid unit, slot and port number separated by forward slashes.

Interface Mode This field indicates whether IGMP is enabled or disabled on the interface. This is a configured value.

Protocol State This field indicates the current state of IGMP on this interface. Possible values are Operational or Non-Operational.

8.2.1.2 show ip igmp groups

This command displays the registered multicast groups on the interface. If “detail” is specified this command displays the registered multicast groups on the interface in detail.

Syntax

```
show ip igmp groups <unit/slot/ports> [detail]
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

IP Address This displays the IP address of the interface participating in the multicast group.

Subnet Mask This displays the subnet mask of the interface participating in the multicast group.

Interface Mode This displays whether IGMP is enabled or disabled on this interface.

The following fields are not displayed if the interface is not enabled:

Querier Status This displays whether the interface has IGMP in Querier mode or

Non-Querier mode.

Groups This displays the list of multicast groups that are registered on this interface.

If detail is specified, the following fields are displayed:

Multicast IP Address This displays the IP Address of the registered multicast group on this interface.

Last Reporter This displays the IP Address of the source of the last membership report received for the specified multicast group address on this interface.

Up Time This displays the time elapsed since the entry was created for the specified multicast group address on this interface.

Expiry Time This displays the amount of time remaining to remove this entry before it is aged out.

Version1 Host Timer This displays the time remaining until the local router will assume that there are no longer any IGMP version 1 multicast members on the IP subnet attached to this interface. This could be an integer value or "-----" if there is no Version 1 host present.

Version2 Host Timer This displays the time remaining until the local router will assume that there are no longer any IGMP version 2 multicast members on the IP subnet attached to this interface. This could be an integer value or "-----" if there is no Version 2 host present.

Group Compatibility Mode The group compatibility mode (v1, v2 or v3) for this group on the specified interface.

8.2.1.3 show ip igmp interface

This command displays the IGMP information for the interface.

Syntax

show ip igmp interface <unit/slot/port>
--

Default Setting

None

Command Mode

Privileged Exec
User EXEC

Display Message

Unit/Slot/Port Valid unit, slot and port number separated by forward slashes.

IGMP Admin Mode This field displays the administrative status of IGMP. This is a configured value.

Interface Mode This field indicates whether IGMP is enabled or disabled on the interface. This is a configured value.

IGMP Version This field indicates the version of IGMP running on the interface. This value can be configured to create a router capable of running either IGMP version 1 or 2.

Query Interval (secs) This field indicates the frequency at which IGMP Host-Query packets are transmitted on this interface. This is a configured value.

Query Max Response Time (1/10 of a second) This field indicates the maximum query response time advertised in IGMPv2 queries on this interface. This is a configured value.

Robustness This field displays the tuning for the expected packet loss on a subnet. If a subnet is expected to have a lot of loss, the Robustness variable may be increased for that interface. This is a configured value.

Startup Query Interval (secs) This value indicates the interval between General Queries sent by a Querier on startup. This is a configured value.

Startup Query Count This value is the number of Queries sent out on startup, separated by the Startup Query Interval. This is a configured value.

Last Member Query Interval (1/10 of a second) This value indicates the Maximum Response Time inserted into Group-Specific Queries sent in response to Leave Group messages. This is a configured value.

Last Member Query Count This value is the number of Group-Specific Queries sent before the router assumes that there are no local members. This is a configured value.

8.2.1.4 show ip igmp interface membership

This command displays the list of interfaces that have registered in the multicast group.

Syntax

```
show ip igmp interface membership <multiipaddr> [detail]
```

Default Setting

None

Command Mode

Privileged Exec
User EXEC

Display Message

Interface Valid unit, slot and port number separated by forward slashes.

Interface IP This displays the IP address of the interface participating in the multicast group.

State This displays whether the interface has IGMP in Querier mode or Non-Querier mode.

Group Compatibility Mode The group compatibility mode (v1, v2 or v3) for the specified group on this interface.

Source Filter Mode The source filter mode (Include/Exclude) for the specified group on this interface. This is "-----" for IGMPv1 and IGMPv2 Membership Reports.

If detail is specified, the following fields are displayed:

Interface Valid unit, slot and port number separated by forward slashes.

Group Compatibility Mode The group compatibility mode (v1, v2 or v3) for the specified group on this interface.

Source Filter Mode The source filter mode (Include/Exclude) for the specified group on this interface. This is "-----" for IGMPv1 and IGMPv2 Membership Reports.

Source Hosts This displays the list of unicast source IP Addresses in the group record of the IGMPv3 Membership Report with the specified multicast group IP Address. This is "-----" for IGMPv1 and IGMPv2 Membership Reports.

Expiry Time This displays the amount of time remaining to remove this entry before it is aged out. This is "- ----" for IGMPv1 and IGMPv2 Membership Reports.

8.2.1.5 show ip igmp interface stats

This command displays the IGMP statistical information for the given interface. The statistics are only displayed when the interface is enabled for IGMP.

Syntax

show ip igmp interface stats <unit/slot/port>
--

Default Setting

None

Command Mode

Privileged Exec
User EXEC

Display Message

Querier Status This field indicates the status of the IGMP router, whether it is running in Querier mode or Non-Querier mode.

Querier IP Address This field displays the IP Address of the IGMP Querier on the IP subnet to which this interface is attached.

Querier Up Time This field indicates the time since the interface Querier was last changed.

Querier Expiry Time This field displays the amount of time remaining before the Other Querier Present Timer expires. If the local system is the querier, the value of this object is zero.

Wrong Version Queries This field indicates the number of queries received whose IGMP version does not match the IGMP version of the interface.

Number of Joins This field displays the number of times a group membership has been added on this interface.

Number of Groups This field indicates the current number of membership entries for this interface.

8.2.2 Configuration Commands

8.2.2.1 ip igmp

This command sets the administrative mode of IGMP in the router to active.

Syntax

ip igmp

no ip igmp

no - This command sets the administrative mode of IGMP in the router to inactive.

Default Setting

Disabled

Command Mode

Global Config

8.2.2.2 ip igmp version

This command configures the version of IGMP for an interface.

Syntax

ip igmp version {1 2 3}

no ip igmp version

no - This command resets the version of IGMP for this interface. The version is reset to the default value.

Default Setting

3

Command Mode

Interface Config

8.2.2.3 ip igmp last-member-query-count

This command sets the number of Group-Specific Queries sent before the router assumes that there are no local members on the interface.

Syntax

ip igmp last-member-query-count <1-20>

no ip igmp last-member-query-count

<1-20> - The range for <1-20> is 1 to 20.

no - This command resets the number of Group-Specific Queries to the default value.

Default Setting

Disabled

Command Mode

Interface Config

8.2.2.4 ip igmp last-member-query-interval

This command configures the Maximum Response Time being inserted into Group-Specific Queries sent in response to Leave Group messages on the interface.

Syntax

```
ip igmp last-member-query-interval <0-255>
```

```
no ip igmp last-member-query-interval
```

<0-255> - The range for <0-255> is 0 to 255 tenths of a second.

no - This command resets the Maximum Response Time being inserted into Group-Specific Queries sent in response to Leave Group messages on the interface to the default value.

Default Setting

1 second

Command Mode

Interface Config

8.2.2.5 ip igmp query-interval

This command configures the query interval for the specified interface. This is the frequency at which IGMP Host-Query packets are transmitted on this interface.

Syntax

```
ip igmp query-interval <1-3600>
```

```
no ip igmp query-interval
```

<1-3600> - The range for <1-3600> is 1 to 3600 seconds.

no - This command resets the query interval for the specified interface to the default value. This is the frequency at which IGMP Host-Query packets are transmitted on this interface.

Default Setting

125 seconds

Command Mode

Interface Config

8.2.2.6 ip igmp query-max-response-time

This command configures the maximum response time interval for the specified interface, which is the maximum query response time advertised in IGMPv2 queries on this interface. The time interval is specified in tenths of a second.

Syntax**ip igmp query-max-response-time <0-255>****no ip igmp query-max-response-time**

<0-255> - The range for <0-255> is 0 to 255 tenths of a second.

no - This command resets the maximum response time interval for the specified interface, which is the maximum query response time advertised in IGMPv2 queries on this interface to the default value. The maximum response time interval is reset to the default time.

Default Setting

100

Command Mode

Interface Config

8.2.2.7 ip igmp robustness

This command configures the robustness that allows tuning of the interface. The robustness is the tuning for the expected packet loss on a subnet. If a subnet is expected to have a lot of loss, the Robustness variable may be increased for the interface.

Syntax**ip igmp robustness <1-255>****no ip igmp robustness**

<1-255> - The range for <1-255> is 1 to 255.

no - This command sets the robustness value to default.

Default Setting

2

Command Mode

Interface Config

8.2.2.8 ip igmp startup-query-count

This command sets the number of Queries sent out on startup, separated by the Startup Query Interval on the interface.

Syntax**ip igmp startup-query-count <1-20>****no ip igmp startup-query-count**

<1-20> - The range for <1-20> is 1 to 20.

no - This command resets the number of Queries sent out on startup, separated by the Startup Query Interval on the interface to the default value.

Default Setting

2

Command Mode

Interface Config

8.2.2.9 ip igmp startup-query-interval

This command sets the interval between General Queries sent by a Querier on startup on the interface. The time interval value is in seconds.

Syntax**ip igmp startup-query-interval <1-300>****no ip igmp startup-query-interval**

<1-300> - The range for <1-300> is 1 to 300 seconds.

no - This command resets the interval between General Queries sent by a Querier on startup on the interface to the default value.

Default Setting

31

Command Mode

Interface Config

8.3 Multicast Commands**8.3.1 Show Commands****8.3.1.1 show ip mcast**

This command displays the system-wide multicast information

Syntax

```
show ip mcast
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Admin Mode: This field displays the administrative status of multicast. This is a configured value.

Protocol State: This field indicates the current state of the multicast protocol. Possible values are Operational or Non-Operational.

Table Max Size: This field displays the maximum number of entries allowed in the multicast table.

Number Of Packets For Which Source Not Found: This displays the number of packets for which the source is not found.

Number Of Packets For Which Group Not Found: This displays the number of packets for which the group is not found.

Protocol: This field displays the multicast protocol running on the router. Possible values are PIMDM, PIMSM, or DVMRP.

Forwarding Multicast Stream Entry Count: This field displays the number of entries in the multicast table.

Highest Entry Count: This field displays the highest entry count in the multicast table.

8.3.1.2 show ip mcast boundary

This command displays all the configured administrative scoped multicast boundaries.

Syntax

show ip mcast boundary {<unit/slot/port> all}
--

< unit/slot/port > - Interface number.

all - This command represents all interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: Valid unit, slot and port number separated by forward slashes.

Group IP: The group IP address.

Mask: The group IP mask.

8.3.1.3 show ip mcast interface

This command displays the multicast information for the specified interface.

Syntax

show ip mcast interface <unit/slot/port>

< unit/slot/port > - Interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: Valid unit, slot and port number separated by forward slashes.

TTL: This field displays the time-to-live value for this interface.

8.3.1.4 show ip mcast mroute

This command displays a summary or all the details of the multicast table.

Syntax
show ip mcast mroute {detail summary}

detail - displays the multicast routing table details.

summary - displays the multicast routing table summary.

Default Setting

None

Command Mode

Privileged Exec

Display Message

If the “**detail**” parameter is specified, the following fields are displayed:

Source IP: This field displays the IP address of the multicast data source.

Group IP: This field displays the IP address of the destination of the multicast packet.

Expiry Time (secs): This field displays the time of expiry of this entry in seconds.

Up Time (secs): This field displays the time elapsed since the entry was created in seconds.

RPF Neighbor: This field displays the IP address of the RPF neighbor.

Flags: This field displays the flags associated with this entry.

If the “**summary**” parameter is specified, the following fields are displayed:

Source IP: This field displays the IP address of the multicast data source.

Group IP: This field displays the IP address of the destination of the multicast packet.

Protocol: This field displays the multicast routing protocol by which this entry was created.

Incoming Interface: This field displays the interface on which the packet for this source/group arrives.

Outgoing Interface List: This field displays the list of outgoing interfaces on which this packet is forwarded.

This command displays the multicast configuration settings such as flags, timer settings, incoming and outgoing interfaces, RPF neighboring routers, and expiration times of all the entries in the multicast mroute table containing the given <groupipaddr>.

Syntax

```
show ip mcast mroute group <groupipaddr> {detail |summary}
```

< groupipaddr > - the IP Address of the destination of the multicast packet.

Default Setting

None

Command Mode

Privileged Exec

Display Message

If the **detail** parameter is specified the follow fields are displayed:

Source IP: This field displays the IP address of the multicast data source.

Group IP: This field displays the IP address of the destination of the multicast packet.

Expiry Time (secs): This field displays the time of expiry of this entry in seconds.

Up Time (secs): This field displays the time elapsed since the entry was created in seconds.

RPF Neighbor: This field displays the IP address of the RPF neighbor.

Flags: This field displays the flags associated with this entry.

If the **summary** parameter is specified the follow fields are displayed:

Source IP: This field displays the IP address of the multicast data source.

Group IP: This field displays the IP address of the destination of the multicast packet.

Protocol This field displays the multicast routing protocol by which this entry was created.

Incoming Interface: This field displays the interface on which the packet for this group arrives.

Outgoing Interface List: This field displays the list of outgoing interfaces on which this packet is forwarded.

This command displays the multicast configuration settings such as flags, timer settings, incoming and outgoing interfaces, RPF neighboring routers, and expiration times of all the entries in the multicast mroute table containing the given <sourceipaddr> or <sourceipaddr> [<groupipaddr>] pair.

Syntax

```
show ip mcast mroute source <sourceipaddr> {summary | <groupipaddr>}
```

< sourceipaddr > - the IP Address of the multicast data source.

< groupipaddr > - the IP Address of the destination of the multicast packet.

Default Setting

None

Command Mode

Privileged Exec

Display Message

If the **< groupipaddr >** parameter is specified the follow fields are displayed:

Source IP: This field displays the IP address of the multicast data source.

Group IP: This field displays the IP address of the destination of the multicast packet.

Expiry Time (secs): This field displays the time of expiry of this entry in seconds.

Up Time (secs): This field displays the time elapsed since the entry was created in seconds.

RPF Neighbor: This field displays the IP address of the RPF neighbor.

Flags: This field displays the flags associated with this entry.

If the **summary** parameter is specified the follow fields are displayed:

Source IP: This field displays the IP address of the multicast data source.

Group IP: This field displays the IP address of the destination of the multicast packet.

Protocol: This field displays the multicast routing protocol by which this entry was created.

Incoming Interface: This field displays the interface on which the packet for this source arrives.

Outgoing Interface List: This field displays the list of outgoing interfaces on which this packet is forwarded.

This command displays all the static routes configured in the static mcast table if is specified or displays the static route associated with the particular **<sourceipaddr>**.

Syntax

show ip mcast mroute static [<sourceipaddr>]

< sourceipaddr > - the IP Address of the multicast data source.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Source IP: This field displays the IP address of the multicast packet source.

Source Mask: This field displays the mask applied to the IP address of the multicast packet source.

RPF Address: This field displays the IP address to be used as RPF for the given source and

mask.

Metric: This field displays the metric value corresponding to the source address.

Interface: Valid unit, slot and port number separated by forward slashes.

8.3.1.5 show mrinfo

This command is used to display the neighbor information of a multicast-capable router from the results buffer pool of the router subsequent to the execution/completion of a "mrinfo [ipaddr]" command. The results subsequent to the completion of the latest "mrinfo" will be available in the buffer pool after a maximum duration of two minutes after the completion of the 'show mrinfo' command. A subsequent issue 'mrinfo' will overwrite the contents of the buffer pool with fresh results.

Syntax

show mrinfo

Default Setting

None

Command Mode

Privileged Exec

Display Message

Router Interface: The IP address of this neighbor.

Neighbor: The neighbor associated with the router interface.

Metric: The metric value associated with this neighbor.

TTL: The TTL threshold associated with this neighbor.

Flags: Status of the neighbor.

8.3.1.6 show mstat

This command is used to display the results of packet rate and loss information from the results buffer pool of the router, subsequent to the execution/completion of a 'mstat <source> [group] [receiver]' command. Within two minutes of the completion of the 'mstat' command, the results will be available in the buffer pool. The next issuing of "mstat" would overwrite the buffer pool with fresh results.

Syntax

show mstat

Default Setting

None

Command Mode

Privileged Exec

Display Message**8.3.1.7 show mtrace**

This command is used to display results of multicast trace path from the results buffer pool of the router, subsequent to the execution/completion of a "mtrace <source> [group] [receiver]" command. The results subsequent to the completion of the "mtrace" will be available in the buffer pool within 2 minutes and thereafter. A subsequent "mtrace" command would overwrite the results in the buffer pool.

Syntax

```
show mtrace
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Hops Away From Destination: The ordering of intermediate routers between the source and the destination.

Intermediate Router Address: The address of the intermediate router at the specified hop distance.

Mcast Protocol In Use: The multicast routing protocol used for the out interface of the specified intermediate router.

TTL Threshold: The Time-To-Live threshold of the out interface on the specified intermediate router.

Time Elapsed Between Hops (msecs): The time between arrival at one intermediate router to the arrival at the next.

8.3.2 Configuration Commands

8.3.2.1 ip multicast

This command sets the administrative mode of the IP multicast forwarder in the router to active. For multicast routing to become operational, IGMP must be currently enabled. An error message will be displayed on the CLI if multicast routing is enabled while IGMP is disabled. However, the IP multicast mode configuration is stored in the multicast configuration file and is automatically enabled once IGMP is enabled.

Syntax

ip multicast no ip multicast

no - This command sets the administrative mode of the IP multicast forwarder in the router to inactive . For multicast routing to become operational, IGMP must be currently enabled. An error message will be displayed on the CLI if multicast routing is enabled while IGMP is disabled. However, the IP multicast mode configuration is stored in the multicast configuration file and is automatically enabled once IGMP is enabled.

Default Setting

Disbale

Command Mode

Global Config

8.3.2.2 ip multicast staticroute

This command creates a static route which is used to perform RPF checking in multicast packet forwarding. The combination of the <sourceipaddr> and the <mask> fields specify the network IP address of the multicast packet source. The <groupipaddr> is the IP address of the next hop toward the source. The <metric> is the cost of the route entry for comparison with other routes to the source network and is a value in the range of 0 and 255. The *current* incoming interface is used for RPF checking for multicast packets matching this multicast static route entry.

Syntax

ip multicast staticroute <sourceipaddr> <mask> <rpfipaddr> <0-255> <unit/slot/port> no ip multicast staticroute <sourceipaddr>

< sourceipaddr > - the IP Address that identifies the multicast packet source for the entry

you are creating.

< mask > - the subnet mask to be applied to the Source IP address.

< rpfiaddr > - the IP address of the neighbor router on the path to the source.

< 0-255 > - the link state cost of the path to the multicast source. The range is 0 – 255.

< unit/slot/port > - the interface number.

no - This command deletes a static route in the static mcast table. The <sourceipaddr> is the IP address of the multicast packet source.

Default Setting

None

Command Mode

Global Config

8.3.2.3 no ip mcast mroute

This command is used to clear entries in the mroute table. The all parameters is used to clear all entries.

The source parameter is used to clear the routes in the mroute table entries containing the specified <sourceipaddr> or <sourceipaddr> [groupipaddr] pair. The source address is the source IP address of the multicast packet. The group address is the Group Destination IP address of the multicast packet.

The group parameter is used to clear the routes in the mroute table entries containing the specified <groupipaddr>. The group address is the Group Destination IP address of the multicast packet.

Syntax
no ip mcast mroute {group <groupipaddr> source <sourceipaddr> [<groupipaddr>] all}

< groupipaddr > - the IP address of the destination of the multicast packet.

< sourceipaddr > - the IP address of the multicast packet source.

all - This command is used to clear all entries.

Default Setting

None

Command Mode

Global Config

8.3.2.4 ip mcast boundary

This command adds an administrative scope multicast boundary specified by <groupipaddr> and <mask> for which this multicast administrative boundary is applicable. <groupipaddr> is a group IP address and <mask> is a group IP mask.

Syntax

```
ip mcast boundary <groupipaddr> <mask>  
no ip mcast boundary <groupipaddr> <mask>
```

< groupipaddr > - the multicast group address for the start of the range of addresses to be excluded. The address must be in the range of 239.0.0.0 through 239.255.255.255.

< mask > - mask to be applied to the multicast group address.

no - This command deletes an administrative scope multicast boundary specified by <groupipaddr> and <mask> for which this multicast administrative boundary is applicable. <groupipaddr> is a group IP address and <mask> is a group IP mask.

Default Setting

None

Command Mode

Interface Config

8.3.2.5 ip multicast ttl-threshold

This command applies the given <ttlthreshold> to a routing interface. The <ttlthreshold> is the TTL threshold which is to be applied to the multicast Data packets which are to be forwarded from the interface. The value for <ttlthreshold> has range from 0 to 255.

Syntax

```
ip multicast ttl-threshold <0 - 255>  
no ip multicast ttl-threshold
```

< 0 - 255 > - the TTL threshold.

no - This command applies the default <ttlthreshold> to a routing interface. The <ttlthreshold> is the TTL threshold which is to be applied to the multicast Data packets which are to be forwarded from the interface.

Default Setting

1

Command Mode

Interface Config

8.3.2.6 mrinfo

This command is used to query the neighbor information of a multicast-capable router specified by [<ipaddr>]. The default value is the IP address of the system at which the command is issued. The mrinfo command can take up to 2 minutes to complete. Only one mrinfo command may be in process at a time. The results of this command will be available in the results bufferpool which can be displayed by using "show mrinfo".

Syntax
mrinfo [<ipaddr>]

<ipaddr> - the IP address of the multicast capable router.

Default Setting

None

Command Mode

Privileged Exec

8.3.2.7 mstat

This command is used to find the packet rate and loss information path from a source to a receiver (unicast router id of the host running mstat). The results of this command will be available in the results bufferpool which can be displayed by using "show mstat". If a debug command is already in progress, a message is displayed and the new request fails.

The <source> is the IP Address of the remote multicast-capable source. The [<receiver>] is the IP address of the receiver. The default value is the IP address of system at which the command

is issued. The [<group>] is a multicast address of the group to be displayed. Default value is 224.2.0.1

Syntax

```
mstat <source> [<group>] [<receiver>]
```

< source > - the IP address of the multicast data source.

<group> - the multicast address of the group to be traced. If you leave this field blank, the multicast address 224.2.0.1 will be used. Valid addresses are 224.0.0.0 through 239.255.255.255.

< receiver > - the IP address of the host to which the *mstat* response will be sent by the last hop router.

Default Setting

None

Command Mode

Privileged Exec

8.3.2.8 mtrace

This command is used to find the multicast path from a source to a receiver (unicast router ID of the host running mtrace). A trace query is passed hop-by-hop along the reverse path from the receiver to the source, collecting hop addresses, packet counts, and routing error conditions along the path, and then the response is returned to the requestor. The results of this command will be available in the results buffer pool which can be displayed by using "show mtrace".

The <source> is the IP Address of the remote multicast-capable source. The [<destination>] is the IP address of the receiver. The default value is the IP address of system at which the command is issued. The [<group>] is the multicast address of the group to be displayed. The default value is 224.2.0.1

If a debug command is already in execution, a message is displayed and the new request fails.

Syntax

```
mtrace <source> [<group>] [<destination>]
```

< source > - the IP address of the multicast data source.

< group > - the Multicast address of the group to be traced. If you do not enter a valid address, multicast address 224.2.0.1 will be used. Valid addresses are 224.0.0.0 through

239.255.255.255.

< destination > - the IP address of the host to which the *mtrace* response will be sent by the last hop router.

Default Setting

None

Command Mode

Privileged Exec

8.3.2.9 disable ip multicast mdebug mtrace

This command is used to disable the processing capability of mtrace query on this router. If the mode is enabled, the mtrace queries received by the router are processed and forwarded appropriately by the router. If the mode is disabled, this router does not respond to the mtrace queries it receives from other router devices.

Syntax
disable ip multicast mdebug mtrace no disable ip multicast mdebug mtrace

no - This command is used to enable the processing capability of mtrace query on this router. If the mode is enabled, the mtrace queries received by the router are processed and forwarded appropriately by the router. If the mode is disabled, this router does not respond to the mtrace queries it receives from other router devices.

Default Setting

None

Command Mode

Global Config

8.4 Protocol Independent Multicast – Dense Mode (PIM-DM) Commands

8.4.1 Show Commands

8.4.1.1 show ip pimdm

This command displays the system-wide information for PIM-DM.

Syntax

```
show ip pimdm
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Admin Mode: This field indicates whether PIM-DM is enabled or disabled. This is a configured value.

Interface: Valid unit, slot and port number separated by forward slashes.

Interface Mode: This field indicates whether PIM-DM is enabled or disabled on this interface. This is a configured value.

Protocol State: This field indicates the current state of PIM-DM on this interface. Possible values are Operational or Non-Operational.

8.4.1.2 show ip pimdm interface

This command displays the interface information for PIM-DM on the specified interface.

Syntax

```
show ip pimdm interface <unit/slot/port>
```

< unit/slot/port > - Interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface Mode: This field indicates whether PIM-DM is enabled or disabled on the specified interface. This is a configured value.

Hello Interval (secs): This field indicates the frequency at which PIM hello messages are transmitted on this interface. By default, the value is 30 seconds.

8.4.1.3 show ip pimdm interface stats

This command displays the statistical information for PIM-DM on the specified interface.

Syntax

show ip pimdm interface stats {<unit/slot/port> all}

< unit/slot/port > - Interface number.

all - this command represents all interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: Valid unit, slot and port number separated by forward slashes.

IP Address: This field indicates the IP Address that represents the PIM-DM interface.

Nbr Count: This field displays the neighbor count for the PIM-DM interface.

Hello Interval: This field indicates the time interval between two hello messages sent from the router on the given interface.

Designated Router: This indicates the IP Address of the Designated Router for this interface.

8.4.1.4 show ip pimdm neighbor

This command displays the neighbor information for PIM-DM on the specified interface.

Syntax

show ip pimdm neighbor [<unit/slot/port> all]
--

< unit/slot/port > - Interface number.

all - this command represents all interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message**Neighbor Addr:** This field displays the IP Address of the neighbor on an interface.**Interface:** Valid unit, slot and port number separated by forward slashes.**Up Time:** This field indicates the time since this neighbor has become active on this interface.**Expiry Time:** This field indicates the expiry time of the neighbor on this interface.

8.4.2 Configuration Commands

8.4.2.1 ip pimdm

This command enables the administrative mode of PIM-DM in the router.

Syntax

ip pimdm

no ip pimdm

no - This command disables the administrative mode of PIM-DM in the router. IGMP must be enabled before PIM-DM can be enabled.

Default Setting

Disabled

Command Mode

Global Config

8.4.2.2 ip pimdm mode

This command sets administrative mode of PIM-DM on an interface to enabled.

Syntax

ip pimdm mode no ip pimdm mode

no - This command sets administrative mode of PIM-DM on an interface to disabled.

Default Setting

Disabled

Command Mode

Interface Config

8.4.2.3 ip pimdm query-interval

This command configures the transmission frequency of hello messages between PIM enabled neighbors. This field has a range of 10 to 3600 seconds.

Syntax

ip pimdm query-interval <10 - 3600> no ip pimdm query-interval

<10 - 3600> - This is time interval in seconds.

no - This command resets the transmission frequency of hello messages between PIM enabled neighbors to the default value.

Default Setting

30

Command Mode

Interface Config

8.5 Protocol Independent Multicast – Sparse Mode (PIM-SM) Commands

8.5.1 Show Commands

8.5.1.1 show ip pimsm

This command displays the system-wide information for PIM-SM.

Syntax

```
show ip pimsm
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Admin Mode: This field indicates whether PIM-SM is enabled or disabled. This is a configured value.

Join/Prune Interval (secs): This field shows the interval at which periodic PIM-SM Join/Prune messages are to be sent. This is a configured value.

Data Threshold Rate (Kbps): This field shows the data threshold rate for the PIM-SM router. This is a configured value.

Register Threshold Rate (Kbps): This field indicates the threshold rate for the RP router to switch to the shortest path. This is a configured value.

Interface: Valid unit, slot and port number separated by forward slashes.

Interface Mode: This field indicates whether PIM-SM is enabled or disabled on the interface. This is a configured value.

Protocol State: This field indicates the current state of the PIM-SM protocol on the interface. Possible values are Operational or Non-Operational.

8.5.1.2 show ip pimsm componenttable

This command displays the table containing objects specific to a PIM domain. One row exists for each domain to which the router is connected.

Syntax

```
show ip pimsm componenttable
```

Default Setting

None

Command Mode

Privileged Exec

Display Message

Component Index: This field displays a number which uniquely identifies the component.

Component BSR Address: This field displays the IP address of the bootstrap router (BSR) for the local PIM region.

Component BSR Expiry Time: This field displays the minimum time remaining before the BSR in the local domain will be declared down.

Component CRP Hold Time: This field displays the hold time of the component when it is a candidate.

8.5.1.3 show ip pimsm interface

This command displays the interface information for PIM-SM on the specified interface.

Syntax
show ip pimsm interface <unit/slot/port>

< unit/slot/port > - Interface number.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Unit/Slot/Port: Valid unit, slot and port number separated by forward slashes.

IP Address: This field indicates the IP address of the specified interface.

Subnet Mask: This field indicates the Subnet Mask for the IP address of the PIM interface.

Mode: This field indicates whether PIM-SM is enabled or disabled on the specified interface. This is a configured value. By default it is disabled.

Hello Interval: This field indicates the frequency at which PIM hello messages are transmitted on this interface. This is a configured value. By default, the value is 30 seconds.

CBSR Preference: This field shows the preference value for the local interface as a candidate bootstrap router. This is a configured value.

CRP Preference: This field shows the preference value as a candidate rendezvous point on this interface.

CBSR Hash Mask Length: This field shows the hash mask length to be advertised in bootstrap messages if this interface is elected as the bootstrap router. The value is used in the hash algorithm for selecting the RP for a particular group.

8.5.1.4 show ip pimsm interface stats

This command displays the statistical information for PIM-SM on the specified interface.

Syntax

```
show ip pimsm interface stats {<unit/slot/port> | all}
```

< unit/slot/port > - Interface number.

all - this command represents all interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: Valid unit, slot and port number separated by forward slashes.

IP Address: This field indicates the IP Address that represents the PIM-SM interface.

Subnet Mask: This field indicates the Subnet Mask of this PIM-SM interface.

Designated Router: This indicates the IP Address of the Designated Router for this interface.

Neighbor Count: This field displays the number of neighbors on the PIM-SM interface.

8.5.1.5 show ip pimsm neighbor

This command displays the neighbor information for PIM-SM on the specified interface.

Syntax

```
show ip pimsm neighbor [<unit/slot/port> | all]
```

< unit/slot/port > - Interface number.

all - this command represents all interfaces.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Interface: Valid unit, slot and port number separated by forward slashes.

IP Address: This field displays the IP Address of the neighbor on an interface.

Up Time: This field indicates the time since this neighbor has become active on this interface.

Expiry Time: This field indicates the expiry time of the neighbor on this interface.

8.5.1.6 show ip pimsm rp

This command displays the PIM information for candidate Rendezvous Points (RPs) for all IP multicast groups or for the specific <group-address> <group-mask> provided in the command. The information in the table is displayed for each IP multicast group.

Syntax
show ip pimsm rp {<group-address> <group-mask> candidate all}

< group-address > - the IP multicast group address.

< group-mask > - the multicast group address mask.

candidate - this command display PIM-SM candidate-RP table information.

all - this command display all group addresses.

Default Setting

None

Command Mode

Privileged Exec

Display Message

Group Address: This field specifies the IP multicast group address.

Group Mask: This field specifies the multicast group address subnet mask.

Address: This field displays the IP address of the Candidate-RP.

Hold Time: This field displays the hold time of a Candidate-RP.

Expiry Time: This field displays the minimum time remaining before the Candidate-RP will be declared down.

Component: This field displays a number which uniquely identifies the component. Each protocol instance connected to a separate domain should have a different index value.

If the “**candidate**” parameter is specified the follow fields are displayed:

Group Address: This field specifies the IP multicast group address.

Group Mask: This field specifies the multicast group address subnet mask.

Address: This field displays the IP address of the Candidate-RP.

8.5.1.7 show ip pimsm rphash

This command displays the RP router that will be selected from the set of active RP routers. The RP router, for the group, is selected by using the hash algorithm defined in RFC 2362.

Syntax

show ip pimsm rphash <group-address>

< group-address > - the IP multicast group address.

Default Setting

None

Command Mode

Privileged Exec

Display Message

IP Address: This field displays the IP address of the RP.

Group Mask: This field displays the group mask for the group address.

8.5.1.8 show ip pimsm staticrp

This command displays the static RP information for the PIM-SM router.

Syntax

show ip pimsm staticrp

Default Setting

None

Command Mode

Privileged Exec

Display Message

Address: This field displays the IP address of the RP.

Group Address: This field displays the group address supported by the RP.

Group Mask: This field displays the group mask for the group address.

8.5.2 Configuration Commands

8.5.2.1 ip pimsm

This command sets administrative mode of PIM-SM multicast routing across the router to enabled. IGMP must be enabled before PIM-SM can be enabled.

Syntax

ip pimsm no ip pimsm

no - This command sets administrative mode of PIM-SM multicast routing across the router to disabled. IGMP must be enabled before PIM-SM can be enabled.

Default Setting

Disbaled

Command Mode

Global Config

8.5.2.2 ip pimsm message-interval

This command is used to configure the global join/prune interval for PIM-SM router. The join/prune interval is specified in seconds. This parameter can be configured to a value from 10 to 3600.

Syntax

ip pimsm message-interval <10 - 3600> no ip pimsm message-interval

<10 - 3600> - This is time interval in seconds.

no - This command is used to reset the global join/prune interval for PIM-SM router to the default value.

Default Setting

60

Command Mode

Global Config

8.5.2.3 ip pimsm register-rate-limit

This command is used to configure the Threshold rate for the RP router to switch to the shortest path. The rate is specified in Kilobytes per second. The possible values are 0 to 2000.

Syntax

```
ip pimsm register-rate-limit <0 - 2000>  
no ip pimsm register-rate-limit
```

<0 - 2000> - This is time interval in seconds.

no - This command is used to reset the Threshold rate for the RP router to switch to the shortest path to the default value.

Default Setting

50

Command Mode

Global Config

8.5.2.4 ip pimsm spt-threshold

This command is used to configure the Threshold rate for the last-hop router to switch to the shortest path. The rate is specified in Kilobytes per second. The possible values are 0 to 2000.

Syntax

```
ip pimsm spt-threshold <0 - 2000>  
no ip pimsm spt-threshold
```

<0 - 2000> - This is time interval in seconds.

no - This command is used to reset the Threshold rate for the last-hop router to switch to the shortest path to the default value.

Default Setting

50

Command Mode

Global Config

8.5.2.5 ip pimsm staticrp

This command is used to create RP IP address for the PIM-SM router. The parameter <rp-address> is the IP address of the RP. The parameter <group-address> is the group address supported by the RP. The parameter <group-mask> is the group mask for the group address.

Syntax

```
ip pimsm staticrp <rp-address> <group-address> <group-mask>  
no ip pimsm staticrp <rp-address> <group-address> <group-mask>
```

< rp-address > - the IP Address of the RP.

< group-address > - the group address supported by the RP.

< group-mask > - the group mask for the group address.

no - This command is used to delete RP IP address for the PIM-SM router. The parameter <rp-address> is the IP address of the RP. The parameter <group-address> is the group address supported by the RP. The parameter <group-mask> is the group mask for the group address.

Default Setting

Disabled

Command Mode

Global Config

8.5.2.6 ip pimsm mode

This command sets administrative mode of PIM-SM multicast routing on a routing interface to enable.

Syntax

```
ip pimsm mode
```


no ip pimsm mode

no - This command sets administrative mode of PIM-SM multicast routing on a routing interface to disabled.

Default Setting

Disbaled

Command Mode

Interface Config

8.5.2.7 ip pimsm query-interval

This command configures the transmission frequency of hello messages in seconds between PIM enabled neighbors. This field has a range of 10 to 3600 seconds.

Syntax

ip pimsm query-interval <10 - 3600>
--

no ip pimsm query-interval

<10 - 3600> - This is time interval in seconds.

no - This command resets the transmission frequency of hello messages between PIM enabled neighbors to the default value.

Default Setting

30

Command Mode

Interface Config

8.5.2.8 ip pimsm cbsrpreference

This command is used to configure the CBSR preference for a particular PIM-SM interface. The range of CBSR preference is -1 to 255.

Syntax

<pre>ip pimsm cbsrpreference <-1 - 255> no ip pimsm cbsrpreference</pre>
--

<-1 - 255> - The preference value for the local interface.

no - This command is used to reset the CBSR preference for a particular PIM-SM interface to the default value.

Default Setting

0

Command Mode

Interface Config

8.5.2.9 ip pimsm cbsrhashmasklength

This command is used to configure the CBSR hash mask length to be advertised in bootstrap messages for a particular PIM-SM interface. This hash mask length will be used in the hash algorithm for selecting the RP for a particular group. The valid range is 0 - 32. The default value is 30.

Syntax

<pre>ip pimsm cbsrhashmasklength <0 - 32> no ip pimsm cbsrhashmasklength</pre>
--

<0 - 32> - The CBSR hash mask length.

no - This command is used to reset the CBSR hash mask length for a particular PIM-SM interface to the default value.

Default Setting

30

Command Mode

Interface Config

8.5.2.10 ip pimsm crppreference

This command is used to configure the Candidate Rendezvous Point (CRP) for a particular

PIM-SM interface. The valid values are from (-1 to 255), and the value of -1 is used to indicate that the local interface is not a Candidate RP interface.

The active router interface, with the highest IP Address and crppreference greater than -1, is chosen as the CRP for the router. The default value is 0.

In the CRP advertisements sent to the bootstrap router (BSR), the router interface advertises itself as the CRP for the group range 224.0.0.0 mask 240.0.0.0.

Syntax
ip pimsm crppreference <-1 - 255> no ip pimsm crppreference

<-1 - 255> - The preference value for the local interface.

no - This command is used to reset the Candidate Rendezvous Point (CRP) for a particular PIM-SM interface to the default value.

Default Setting

0

Command Mode

Interface Config

9 Rapid Super Ring Member Mode Commands

Korenix JetNet 6524G supports part of the Multiple Super Ring (MSR) technology. Rapid Super Ring is one of the MSR technology, apply to single Ring topology. The JetNet 6524G can act as the member of the RSR, this is Rapid Super Ring Member mode. To enable this mode, you should enable the global settings, assign the member ports, port 1 and port 2 to the Ring. Currently, JetNet 6524G can act as member mode of single ring.

9.1 Global Configuration

This command configures the global setting of the Rapid Super Ring Member mode. This is the first and Must command before enable the Rapid Super Ring Member mode.

Syntax
rapid-super-ring no rapid-super-ring

rapid-super-ring - This is to enable the Rapid Super Ring Member mode
no - This command sets administrative mode of Rapid Super Ring Member mode to disabled.

Default Setting

Disable

Command Mode

Global Config

9.2 Rapid Super Ring Configuration

This command configures the member ports of the Rapid Super Ring Member mode.

Syntax
rapid-super-ring enable no rapid-super-ring enable

rapid-super-ring enable - This is to enable the Member port to specific port

no - This command sets administrative mode of Member port to disabled.

Default Setting

Disable

Command Mode

Interface Config

9.3 Rapid Super Ring Summary

This command configures the member ports of the Rapid Super Ring Member mode.

Syntax

show rapid-super-ring

show rapid-super-ring - This command display the summary information of the Rapid Super Ring

Default Setting

None

Command Mode

Privileged Exec, User Exec, Session Mode

Display Message

Switch#: Switch rapid-super-ring

RSR Mode This field indicates the RSR member mode status.

RSR Ring ID This field indicates the RSR Ring ID leant from the RSR Hello packet

RSR Version This field indicates the Ring Version.

Ring State status This field indicates the status of the RSR ring.

Ring's RM MAC address This field indicates the RM's MAC address

RSR members on port This field display the configured members of the RSR ring.

10 Stacking Commands

10.1 show switch

This command displays information about all units in the stack. If users run this command in session mode, it only shows the information of the corresponding switch in that session.

Syntax

show switch [detail stack-ports [counters [detailed]]]
--

Default Setting

None

Command Mode

Privileged Exec, User Exec, Session Mode

Display Message

Switch#: Switch unit number in the stack.

Role: Switch Role in the stack. Possible values are Master, Slave, or Unassigned.

MAC Address: MAC address of the switch in the stack.

Priority: This field indicates the administrative management preference value assigned to the switch. This preference value indicates how likely the switch is to be chosen as the Primary Management Unit.

Current Status: This field displays the switch status. Possible values are Ready, Unsupported, Code Mismatch, Config Mismatch, Present, or Not Present. Note that Ready state means the switch in the stack is detected and the chips in the switch are successfully initialized.

Stack port status: This field indicates the link status of the HighGig ports.

Link Speed (Gb/s): This field indicates the speed of the HighGig ports.

Configured Stack Mode: The field indicates stack or Ethernet. The value of NA means users do not configure the stack mode.

Running Stack Mode: The field indicates stack or Ethernet.

Tx Data Rate Transmit data rate in megabits per second on the stacking port.

Tx Error Rate Platform-specific number of transmit errors per second.

Tx Total Error Platform-specific number of total transmit errors since power-up.

Rx Data Rate Receive data rate in megabits per second on the stacking port.

Rx Error Rate Platform-specific number of receive errors per second.

Rx Total Errors Platform-specific number of total receive errors since power-up.

RBYT: Number of received bytes.

RPKT: Number of received packets.

TBYT: Number of transmitted bytes.

TPKT: Number of transmitted packets.

RFCS: Number of received FCS errors.

RFRG: Number of received packets which are undersize and FCS errors.

RJBR: Number of received packets which are oversize and FCS errors.

RUND: Number of received packets which are undersize and FCS are OK.

ROVR: Number of received packets which are oversize and FCS are OK.

TAGE: Number of packets which are aged out in MMU.

TABRT: Number of packets which are aborted

10.2 show supported switchtype

This commands displays information about all supported switch types.

Syntax

show supported switchtype [switchindex]
--

[switchindex] - This field displays the index into the database of supported switch types. This index is used when preconfiguring a member to be added to the stack.

Default Setting

None

Command Mode

Privileged Exec, User Exec

Display Message

Switch Index (SID) This field displays the index into the database of supported switch types. This index is used when preconfiguring a member to be added to the stack.

Switch Model ID This field displays the model identifier for the supported switch type.

Management Preference This field indicates the management preference value of the switch type.

Switch Type This field displays the 32-bit numeric switch type for the supported switch.

Model Identifier This field displays the model identifier for the supported switch type.

Switch Description This field displays the description for the supported switch type.

Management Preference A two-byte field that indicates whether this unit is capable of becoming the Management Unit. If the value is set to zero then the unit cannot support Management Unit function. The higher value means that the unit is more desirable than another unit with lower value for running the management function. The device manufacturer sets this field.

10.3 switch provision

This command configures a switch.

Syntax

```
switch <unit> provision <type>
no switch <unit> provision
```

<unit> - Is the switch identifier of the switch to be added/removed from the stack.

<type> - Is the index into the database of the supported switch types, indicating the type of the switch being preconfigured. The switch index is a 32-bit integer.

Note - Switch index can be obtained by executing the show supported switchtype command in User Exec mode.

Default Setting

None

Command Mode

Global Config

10.4 switch priority

This command configures the ability of a switch to become the Primary Management Unit. The switch with the highest priority value will be chosen to become the Primary Management Unit if the active Primary Management Unit fails.

Syntax

```
switch <unit> priority <value>
no switch <unit> priority
```

<unit> - Is the switch identifier.

<value> - Is the preference parameter that allows users to specify, priority of one backup switch over another. The range of <value> is (0 to 15), where 0 means the switch will not

become a management unit. Note that users can neither set management unit's priority value to 0 nor set the priority of a provision switch.

No – Set priority value to unassigned.

Default Setting

Unassigned.

Command Mode

Global Config

10.5 switch renumber

This command changes the switch identifier for a switch in the stack. Upon execution, the switch will be configured with the configuration information for the new switch, if any. The old switch configuration information will be retained, however the old switch will be operationally unplugged.

Syntax

switch <oldunit> renumber <newunit>
--

< oldunit > - Is the current switch identifier on the switch whose identifier is to be changed.

< newunit > - Is the new switch identifier.

Default Setting

None.

Command Mode

Global Config

10.6 switch movemanagement

This command moves the Primary Management Unit functionality from one switch to another. Upon execution, the entire stack (including all interfaces in the stack) will be unconfigured and reconfigured with the configuration on the new Primary Management Unit.

Syntax

```
switch movemanagement <fromunit> <tounit>
```

< fromunit > - Is the switch identifier on the current Primary Management Unit.

< tounit > - Is the switch identifier on the new Primary Management Unit.

Note - After the reload is complete, all stack management capability must be performed on the new Primary Management Unit. To preserve the current configuration across a stack move, execute the **copyconfig** command before performing the stack move. A stack move will cause all routes and layer 2 addresses to be lost. This command is executed on the Primary Management Unit. The administrator is prompted to confirm the management move.

Default Setting

None.

Command Mode

Global Config

10.7 archive copy-sw

This command replicates the code image file in the flash from the Primary Management Unit to the other switch(es) in the stack. The code image is loaded on the destination system <unit>, if specified, otherwise the code image is loaded on all switches in the stack. Switch(es) must be reset for the new code to start running.

Syntax

```
archive copy-sw [destination-system <unit>]
```

< unit > - download the run time code to the specified switch ID.

Default Setting

None.

Command Mode

Privileged Exec

10.8 archive download-sw

This command downloads the code image file to the Primary Management switch and all slave switches in the stack. The **<url>** is the location from which the code image file could be downloaded.. The switch must be reset for the new code to start running.

Syntax

archive download-sw <url>
--

< url > - Specify the location from which the code image file could be downloaded.

Default Setting

None.

Command Mode

Privileged Exec

10.9 reload

This command resets the entire stack or the identified [unit]. The administrator is prompted to confirm that the reset should proceed.

Syntax

```
reload [slot <unit>]
```

< unit > - Specify the switch to be reset.

Default Setting

None.

Command Mode

Privileged Exec

10.10 session

This command provides users to access a specific stack member. Users can show the information of this switch in the stack.

Syntax

```
session <unit>
```

< unit > - Specify the switch to be access.

Default Setting

None.

Command Mode

Privileged Exec


11 Web-Based Management Interface

11.1 Overview

Your Layer 3 Network Switch provides a built-in browser software interface that lets you configure and manage it remotely using a standard Web browser such as Microsoft Internet Explorer or Netscape Navigator. This software interface also allows for system monitoring and management of the Network Switch. When you configure this Network Switch for the first time from the console, you have to assign an IP address and subnet mask to the Network Switch. Thereafter, you can access the Network Switch's Web software interface directly using your Web browser by entering the switch's IP address into the address bar. In this way, you can use your Web browser to manage the Switch from any remote PC station, just as if you were directly connected to the Network Switch's console port.

The 7 menu options available are: **System**, **Switching**, **Routing**, **Security**, **QOS**, **IP Multicast**, and **Stacking**.

1. **System Menu:** This section provides information for configuring switch interface (port), SNMP and trap manager, Ping, DHCP client, SNTP, system time, defining system parameters including telnet session and console baud rate, etc, downloading switch module software, and resetting the switch module, switch statistics and Layer 2 Mac address.
2. **Switching Menu:** This section provides users to configure switch Port-Based VLAN, Protocol-Based VLAN, GARP, IGMP Snooping, Port Channel, Spanning Tree, and 802.1p priority Mapping and port security.
3. **Routing Menu:** This section provides users to configure OSPF, RIP, Router Discovery, Static Route, VLAN Routing, VRRP, BOOTP/DHCP relay, and DNS relay.
4. **Security Menu:** This section provides users to configure switch securities including 802.1x, Radius, TACACS, IP filter, Secure Http, and Secure Shell.
5. **QOS Menu:** This section provides users to configure Access Control Lists, Differentiated Service, and Class of Service.
6. **IP Multicast Menu:** This section provides users to configure DVMRP, IGMP, Multicast, PIM-DM, PIM-SM. It also provides information for a multicast distribution tree.
7. **Stacking Menu:** This section provides users to configure the unit number and priority for a switch in the stack and change the Primary Management Unit. It also provides information for switches in the stack.

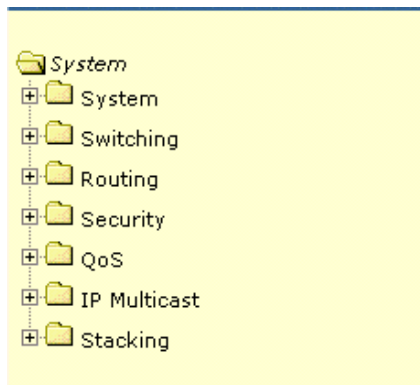

11.2 Main Menu

11.2.1 System Menu

11.2.1.1 View ARP Cache

The Address Resolution Protocol (ARP) dynamically maps physical (MAC) addresses to Internet (IP) addresses. This panel displays the current contents of the ARP cache.

For each connection, the following information is displayed:

- The physical (MAC) Address
- The associated IP address
- The identification of the port being used for the connection

ARP Cache			Print	Reload	Help
MAC Address	IP Address	Unit/Slot/Port			
00:08:74:C7:3B:D6	192.168.2.66	1/0/2			
Refresh		Clear All			

11.2.1.2 Viewing Inventory Information

Use this panel to display the switch's Vital Product Data, stored in non-volatile memory at the factory.

Non-Configurable Data

System Description - The product name of this switch.

Machine Type - The machine type of this switch.

Machine Model - The model within the machine type.

Serial Number - The unique box serial number for this switch.

Part Number - The manufacturing part number.

Base MAC Address - The burned-in universally administered MAC address of this switch.

Hardware Version - The hardware version of this switch. It is divided into four parts. The first byte is the major version and the second byte represents the minor version.

Loader Version - The release-version maintenance number of the loader code currently running on the switch. For example, if the release was 1, the version was 2, and the maintenance number was 4, the format would be '1.2.4'.

Boot Rom Version - The release-version maintenance number of the boot rom code currently running on the switch. For example, if the release was 1, the version was 2, and the maintenance number was 4, the format would be '1.2.4'.

Label Revision Number - The label revision serial number of this switch is used for manufacturing purpose.

Runtime Version - The release-version maintenance number of the code currently running on the switch. For example, if the release was 1, the version was 2, and the maintenance number was 4, the format would be '1.2.4'.

Operating System - The operating system currently running on the switch.

Network Processing Device - Identifies the network processor hardware.

Gigabit Ethernet Compliance Codes - Transceiver's compliance codes.

Vendor Name - The SFP transceiver vendor name shall be the full name of the corporation, a commonly accepted abbreviation of the name of the corporation, the SCSI company code for the corporation, or the stock exchange code for the corporation.

Vendor Part Number - Part number provided by SFP transceiver vendor.

Vendor Serial Number - Serial number provided by vendor.

Vendor Revision Number - Revision level for part number provided by vendor.

Vendor Manufacturing Date - Identifies the network processor hardware.

Temperature – The temperature of the switch

FAN 1 Status – The status of FAN 1. It is active or inactive.




FAN 2 Status – The status of FAN 2. It is active or inactive.

Additional Packages - A list of the optional software packages installed on the switch, if any.

Command Buttons

Refresh - Updates the information on the page.

Inventory Information

 **Print**  **Reload**  **Help**

Management Unit Number	1
System Description	Switch
Machine Type	LB2
Machine Model	LB2 System - 24 GE
Serial Number	QTFCEA9240153
Part Number	1LB2ZZST22
Base MAC Address	00:23:8B:CE:7C:5B
Hardware Version	0.2
Loader Version	1.0
Boot Rom Version	1.0
Label Revision Number	1
Runtime Version	1.12
Operating System	VxWorks5.5.1
Network Processing Device	BCM56302 REV 18

GBIC 23	
Gigabit Ethernet Compliance Codes	1000BASE-SX
Vendor Name	AGILENT
Vendor Part Number	HFBR-5710L
Vendor Serial Number	0409191645119325
Vendor Revision Number	
Vendor Manufacturing Date	2004/09/19
Switch 1	
Now Temperature	38.0
FAN 1 Status	active
FAN 2 Status	active
Additional Packages	<div>FASTPATH QoS FASTPATH Multicast FASTPATH Stacking</div>

Refresh

11.2.1.3 Configuring Management Session and Network Parameters

11.2.1.3.1. Viewing System Description Page

Configurable Data

System Name - Enter the name you want to use to identify this switch. You may use up to 31 alpha-numeric characters. The factory default is blank.

System Location - Enter the location of this switch. You may use up to 31 alpha-numeric characters. The factory default is blank.

System Contact - Enter the contact person for this switch. You may use up to 31 alpha-numeric characters. The factory default is blank.

Non-Configurable Data

System Description - The product name of this switch.

System Object ID - The base object ID for the switch's enterprise MIB.

System IP Address - The IP Address assigned to the network interface.

System Up time - The time in days, hours and minutes since the last switch reboot.

MIBs Supported - The list of MIBs supported by the management agent running on this switch.

Command Buttons

Submit - Update the switch with the values on the screen. If you want the switch to retain the new values across a power cycle you must perform a save.

System Description		Print	Reload	Help
System Description	Switch			
System Name	<input type="text"/>			
System Location	<input type="text"/>			
System Contact	<input type="text"/>			
IP Address	192.168.10.254			
System Object ID	1.3.6.1.4.1.24062.2.6.2			
System Up Time	0 days, 2 hours, 54 minutes			
	RFC 1907 - SNMPv2-MIB RFC 2819 - RMON-MIB SWITCH-MIB SNMP-COMMUNITY-MIB SNMP-FRAMEWORK-MIB SNMP-MPD-MIB SNMP-NOTIFICATION-MIB SNMP-TARGET-MIB SNMP-USER-BASED-SM-MIB SNMP-VIEW-BASED-ACM-MIB USM-TARGET-TAG-MIB LAG-MIB RFC 1213 - RFC1213-MIB RFC 1493 - BRIDGE-MIB RFC 2707 - VLAN-MIB ROUTING-MIB QOS-MIB QOS-ACL-MIB RFC 3289 - DIFFSERV-DSCP-TC RFC 3289 - DIFFSERV-MIB QOS-DIFFSERV-EXTENSIONS-MIB QOS-DIFFSERV-PRIVATE-MIB RFC 2932 - IPMROUTE-MIB draft-ietf-magma-mgmd-mib-03 RFC 2934 - PIM-MIB DVMRP-STD-MIB IANA-RTPROTO-MIB MULTICAST-MIB			
	<input type="button" value="Submit"/>			

11.2.1.3.2. Configuring Network Connectivity Page

The network interface is the logical interface used for in-band connectivity with the switch via any of the switch's front panel ports. The configuration parameters associated with the switch's network interface do not affect the configuration of the front panel ports through which traffic is switched or routed.

To access the switch over a network you must first configure it with IP information (IP address, subnet mask, and default gateway). You can configure the IP information using any of the following:

BOOTP

DHCP

Terminal interface via the EIA-232 port

Once you have established in-band connectivity, you can change the IP information using any of the following:

Terminal interface via the EIA-232 port

Terminal interface via telnet

SNMP-based management

Web-based management

Configurable Data

IP Address - The IP address of the interface. The factory default value is 0.0.0.0

Subnet Mask - The IP subnet mask for the interface. The factory default value is 0.0.0.0

Default Gateway - The default gateway for the IP interface. The factory default value is 0.0.0.0

Network Configuration Protocol Current - Choose what the switch should do following power-up: transmit a Bootp request, transmit a DHCP request, or do nothing (none). The factory default is None.

You cannot make this choice for both the network configuration protocol and the service port. You will only be given the choices for Bootp or DHCP here if the service port protocol is configured to None.

Management VLAN ID - Specifies the management VLAN ID of the switch. It may be configured to any value in the range of 1 - 4054. The management VLAN is used for management of the switch. This field is configurable for administrative users and read-only for other users.

Web Mode - Specify whether the switch may be accessed from a Web browser. If you choose to enable web mode you will be able to manage the switch from a Web browser. The factory default is enabled.

Java Mode - Enable or disable the java applet that displays a picture of the switch at the top right of the screen. If you run the applet you will be able to click on the picture of the switch to select configuration screens instead of using the navigation tree at the left side of the screen. The factory default is enabled.

Web Port - This field is used to set the HTTP Port Number. The value must be in the range of 1 to 65535. Port 80 is the default value. The currently configured value is shown when

the web page is displayed.

Non-Configurable Data

Burned-in MAC Address - The burned-in MAC address used for in-band connectivity if you choose not to configure a locally administered address.

Command Buttons

Submit - Update the switch with the values on the screen. If you want the switch to retain the new values across a power cycle you must perform a save.

Network Connectivity Configuration	
IP Address	192.168.2.160
Subnet Mask	255.255.255.0
Default Gateway	0.0.0.0
Burned In MAC Address	00:C0:9F:00:28:92
Network Configuration Protocol Current	None
Management VLAN ID	1
Web Mode	Enable
Java Mode	Enable
Web Port	80
<input type="button" value="Submit"/>	

11.2.1.3.3. Configuring Telnet Session Page

Configurable Data

Telnet Session Timeout (minutes) - Specify how many minutes of inactivity should occur on a telnet session before the session is logged off. You may enter any number from 1 to 160. The factory default is 5.


Maximum Number of Telnet Sessions - Use the pulldown menu to select how many simultaneous telnet sessions will be allowed. The maximum is 5, which is also the factory default.

Allow New Telnet Sessions - If you set this to no, new telnet sessions will not be allowed. The factory default is yes.

Password Threshold - When the logon attempt threshold is reached on the console port, the system interface becomes silent for a specified amount of time before allowing the next logon attempt. (Use the silent time command to set this interval.) When this threshold is reached for Telnet, the Telnet logon interface closes. The default value is 3.

Command Buttons

Submit - Update the switch with the values on the screen. If you want the switch to retain the new values across a power cycle you must perform a save.

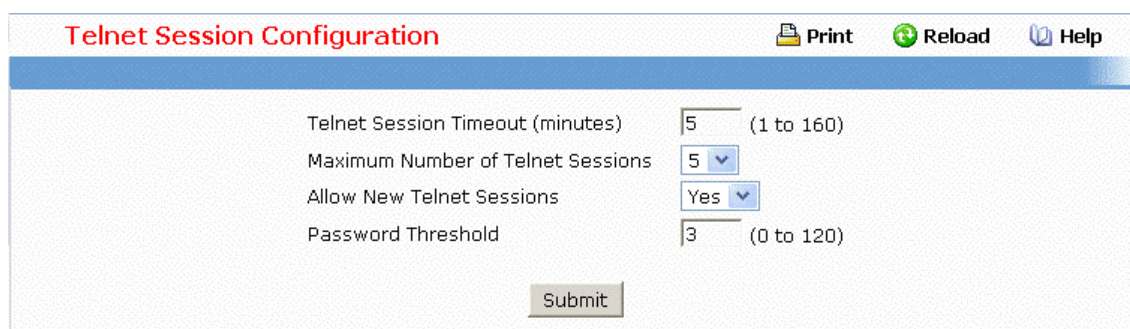

The screenshot shows the 'Telnet Session Configuration' page. At the top, there is a title bar with 'Telnet Session Configuration' in red, and three icons: 'Print', 'Reload', and 'Help'. Below the title bar, there are four configuration items: 'Telnet Session Timeout (minutes)' with a text input field containing '5' and a range '(1 to 160)'; 'Maximum Number of Telnet Sessions' with a dropdown menu showing '5'; 'Allow New Telnet Sessions' with a dropdown menu showing 'Yes'; and 'Password Threshold' with a text input field containing '3' and a range '(0 to 120)'. At the bottom center, there is a 'Submit' button.

11.2.1.3.4. Configuring Outbound Telnet Client Configuration Page

Configurable Data


Admin Mode - Specifies if the Outbound Telnet service is Enabled or Disabled. Default value is Enabled.

Maximum Sessions - Specifies the maximum number of Outbound Telnet Sessions allowed. Default value is 5. Valid Range is (0 to 5).

Session Timeout - Specifies the Outbound Telnet login inactivity timeout. Default value is 5. Valid Range is (1 to 160).

Command Buttons

Submit - Sends the updated configuration to the switch. Configuration changes take effect immediately.

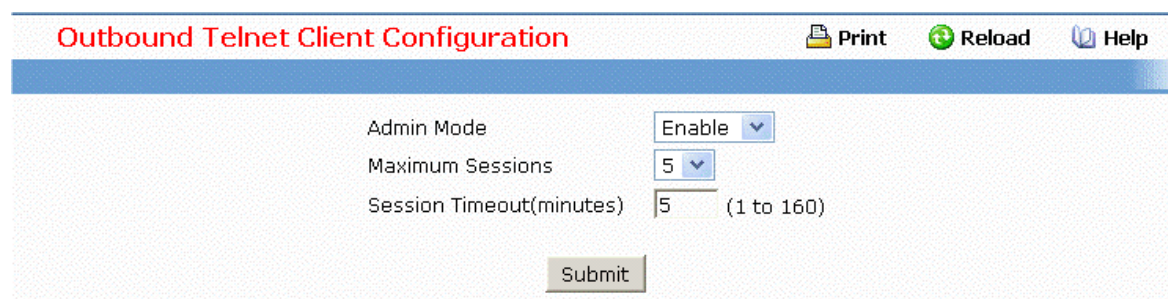

The screenshot shows the 'Outbound Telnet Client Configuration' page. At the top, there is a title bar with 'Outbound Telnet Client Configuration' in red, and three icons: 'Print', 'Reload', and 'Help'. Below the title bar, there are three configuration items: 'Admin Mode' with a dropdown menu showing 'Enable'; 'Maximum Sessions' with a dropdown menu showing '5'; and 'Session Timeout(minutes)' with a text input field containing '5' and a range '(1 to 160)'. At the bottom center, there is a 'Submit' button.

11.2.1.3.5. Configuring Serial Port Page

Configurable Data

Serial Port Login Timeout (minutes) - Specify how many minutes of inactivity should occur on a serial port connection before the switch closes the connection. Enter a number between 0 and 160: the factory default is 5. **Entering 0 disables the timeout.**

Baud Rate (bps) - Select the default baud rate for the serial port connection from the

pull-down menu. You may choose from 1200, 2400, 4800, 9600, 19200, 38400, 57600, and 115200 baud. The factory default is 9600 baud.

Password Threshold - When the logon attempt threshold is reached on the console port, the system interface becomes silent for a specified amount of time before allowing the next logon attempt. (Use the silent time command to set this interval.) When this threshold is reached for Telnet, the Telnet logon interface closes. The default value is 3.

Silent Time (Sec) - Use this command to set the amount of time the management console is inaccessible after the number of unsuccessful logon attempts exceeds the threshold set by the password threshold command. The default value is 0.

Non-Configurable Data

Character Size (bits) - The number of bits in a character. This is always 8.

Flow Control - Whether hardware flow control is enabled or disabled. It is always disabled.

Parity - The parity method used on the serial port. It is always None.

Stop Bits - The number of stop bits per character. It is always 1.

Command Buttons

Submit - Update the switch with the values on the screen. If you want the switch to retain the new values across a power cycle you must perform a save.

The screenshot shows a web browser window titled "Serial Port Configuration". At the top right, there are three buttons: "Print", "Reload", and "Help". The main content area contains a list of configuration parameters with their current values and ranges in parentheses:

Serial Port Login Timeout (minutes)	160 (0 to 160)
Baud Rate (bps)	115200
Character Size (bits)	8
Flow Control	Disabled
Stop Bits	1
Parity	None
Password Threshold	3 (0 to 120)
Silent Time (Sec)	0 (0 to 65535)

At the bottom center of the form is a "Submit" button.

11.2.1.3.6. Defining User Accounts Page

By default, two user accounts exist:

admin, with 'Read/Write' privileges

guest, with 'Read Only' privileges

By default, both of these accounts have blank passwords. The names are not case sensitive.

If you logon with a user account with 'Read/Write' privileges (that is, as admin) you can use the User Accounts screen to assign passwords and set security parameters for the default accounts, and to add and delete accounts (other than admin) up to the maximum of six. Only a user with 'Read/Write' privileges may alter data on this screen, and only one account may be created with 'Read/Write' privileges.

Selection Criteria

User Name Selector - You can use this screen to reconfigure an existing account, or to create a new one. Use this pulldown menu to select one of the existing accounts, or select 'Create' to add a new one, provided the maximum of five 'Read Only' accounts has not been reached.

Configurable Data

User Name - Enter the name you want to give to the new account. (You can only enter data in this field when you are creating a new account.) User names are up to eight characters in length and are not case sensitive. Valid characters include all the alphanumeric characters as well as the dash ('-') and underscore ('_') characters.

Password - Enter the optional new or changed password for the account. It will not display as it is typed, only asterisks (*) will show. Passwords are up to eight alpha numeric characters in length, and are case sensitive.

Confirm Password - Enter the password again, to confirm that you entered it correctly. This field will not display, but will show asterisks (*).

Authentication Protocol - Specify the SNMPv3 Authentication Protocol setting for the selected user account. The valid Authentication Protocols are None, MD5 or SHA. If you select None, the user will be unable to access the SNMP data from an SNMP browser. If you select MD5 or SHA, the user login password will be used as the SNMPv3 authentication password, and you must therefore specify a password, and it must be eight characters.

Encryption Protocol - Specify the SNMPv3 Encryption Protocol setting for the selected user account. The valid Encryption Protocols are None or DES. If you select the DES Protocol you must enter a key in the Encryption Key field. If None is specified for the Protocol, the Encryption Key is ignored.

Encryption Key - If you selected DES in the Encryption Protocol field enter the SNMPv3 Encryption Key here. Otherwise this field is ignored. Valid keys are 8 to 64 characters. The Apply checkbox must be checked in order to change the Encryption Protocol and Encryption Key.

Non-Configurable Data

Access Mode - Indicates the user's access mode. The admin account always has 'Read/Write' access, and all other accounts have 'Read Only' access.

SNMP v3 Access Mode - Indicates the SNMPv3 access privileges for the user account. The admin account always has 'Read/Write' access, and all other accounts have 'Read Only' access.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

Delete - Delete the currently selected user account. If you want the switch to retain the new values across a power cycle, you must perform a save. This button is only visible when you have selected a user account with 'Read Only' access. You cannot delete the 'Read/Write' user.

User Accounts

Print Reload Help

User hello

User Name hello

Password

Confirm Password

Access Mode Read Only

SNMP v3 User Configuration

SNMP v3 Access Mode Read Only

Authentication Protocol None

Encryption Protocol None

Encryption Key ☐ Apply

Submit Delete

11.2.1.3.7. Defining Authentication List Configuration Page

You use this screen to configure login lists. A login list specifies the authentication method(s) you want used to validate switch or port access for the users associated with the list. The pre-configured users, admin and guest, are assigned to a pre-configured list named defaultList, which you may not delete. All newly created users are also assigned to the defaultList until you specifically assign them to a different list

Selection Criteria

Authentication List - Select the authentication login list you want to configure. Select 'create' to define a new login list. When you create a new login list, 'local' is set as the initial authentication method.

Configurable Data

Authentication List Name - If you are creating a new login list, enter the name you want to assign. It can be up to 15 alphanumeric characters and is not case sensitive.

Method 1 - Use the dropdown menu to select the method that should appear first in the selected authentication login list. If you select a method that does not time out as the first method, such as 'local' no other method will be tried, even if you have specified more than one method. Note that this parameter will not appear when you first create a new login list. The options are:

Local- the user's locally stored ID and password will be used for authentication

Radius- the user's ID and password will be authenticated using the RADIUS server instead of locally

Reject- the user is never authenticated

Tacacs- the user's ID and password will be authenticated using the TACACS server instead of locally

Undefined- the authentication method is unspecified (this may not be assigned as the first method)

Method 2 - Use the dropdown menu to select the method, if any, that should appear


second in the selected authentication login list. This is the method that will be used if the first method times out. If you select a method that does not time out as the second method, the third method will not be tried. Note that this parameter will not appear when you first create a new login list.

Method 3 - Use the dropdown menu to select the method, if any, that should appear third in the selected authentication login list. Note that this parameter will not appear when you first create a new login list.

Command Buttons

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch. These changes will not be retained across a power cycle unless you perform a save.

Delete - Remove the selected authentication login list from the configuration. The delete will fail if the selected login list is assigned to any user (including the default user) for system login or IEEE 802.1x port access control. You can only use this button if you have Read/Write access. The change will not be retained across a power cycle unless you perform a save.

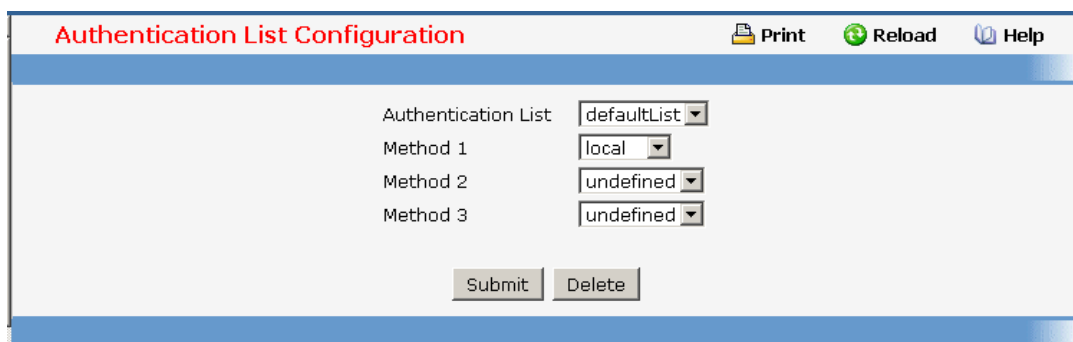

The screenshot shows a web browser window titled "Authentication List Configuration". At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". The main content area has a light gray background. It contains four labels on the left: "Authentication List", "Method 1", "Method 2", and "Method 3". To the right of each label is a dropdown menu. The "Authentication List" dropdown is currently set to "defaultList". The "Method 1" dropdown is set to "local". The "Method 2" and "Method 3" dropdowns are both set to "undefined". At the bottom of the form, there are two buttons: "Submit" and "Delete".

11.2.1.3.8. Viewing Login Session Page

Non-Configurable Data

ID - Identifies the ID of this row.

User Name - Shows the user name of user who made the session.

Connection From - Shows the IP from which machine the user is connected.

Idle Time - Shows the idle session time.

Session Time - Shows the total session time.

Session Type - Shows the type of session: telnet, serial or SSH.

Command Buttons

Refresh - Update the information on the page.

Login Sessions					
ID	User Name	Connection From	Idle Time	Session Time	Session Type
00	admin	192.168.2.66	00:00:03	00:00:05	Telnet
Refresh					

11.2.1.3.9. Viewing Authentication List Summary Page

Non-Configurable Data

Authentication List - Identifies the authentication login list summarized in this row.

Method List - The ordered list of methods configured for this login list.

Login Users - The users you assigned to this login list on the User Login Configuration screen. This list is used to authenticate the users for system login access.

802.1x Port Security Users The users you assigned to this login list on the Port Access Control User Login Configuration screen - This list is used to authenticate the users for port access, using the IEEE 802.1x protocol.

Command Buttons

Refresh - Update the information on the page.

Authentication List Summary			
Authentication List	Method List	Login Users	802.1x Port Security Users
defaultList	local	admin guest hello default	admin guest hello default
Refresh			

11.2.1.3.10. Defining User Login Page

Note: This page provides a user account (from those already created) to be added into the Authentication List.

Each configured user is assigned to a login list that specifies how the user should be authenticated when attempting to access the switch or a port on the switch. After creating a new user account on the User Account screen, you should assign that user to a login list for the switch using this screen and, if necessary, to a login list for the ports using the Port Access Control User Login Configuration screen. If you need to create a new login list for the user, you would do so on the Login Configuration screen.

The pre-configured users, admin and guest, are assigned to a pre-configured list named defaultList, which you may not delete. All newly created users are also assigned to the defaultList until you specifically assign them to a different list.

A user that does not have an account configured on the switch is termed the 'default' or 'non-configured' user. If you assign the 'non-configured user' to a login list that specifies

authentication via the RADIUS server, you will not need to create an account for all users on each switch. However, by default the 'non-configured user' is assigned to 'defaultList', which by default uses local authentication.

Selection Criteria

User - Select the user you want to assign to a login list. Note that you must always associate the admin user with the default list. This forces the admin user to always be authenticated locally to prevent full lockout from switch configuration. If you assign a user to a login list that requires remote authentication, the user's access to the switch from all CLI, web, and telnet sessions will be blocked until the authentication is complete. Refer to the discussion of maximum delay in the RADIUS configuration help.


Configurable Data

Authentication List - Select the authentication login list you want to assign to the user for system login.

Command Buttons

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch. These changes will not be retained across a power cycle unless you perform a save.

Refresh - Updates the information on the page.

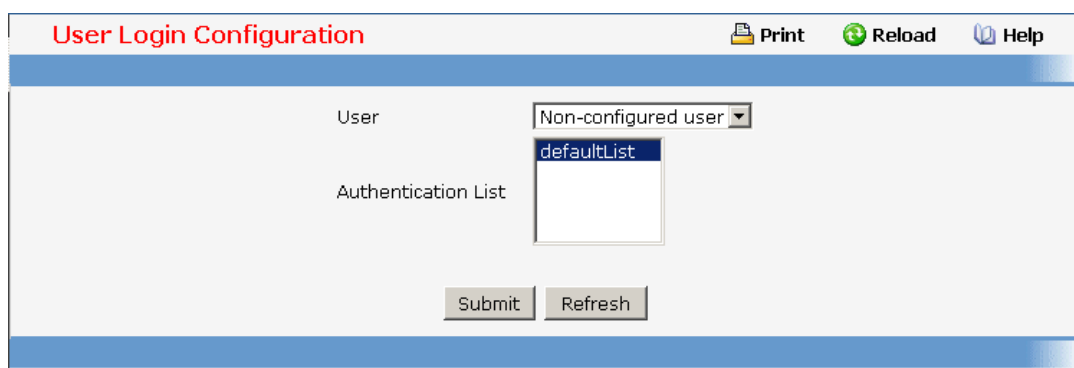

The screenshot shows a web browser window titled "User Login Configuration". At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". The main content area has a light blue background. On the left, there are two labels: "User" and "Authentication List". To the right of "User" is a dropdown menu currently showing "Non-configured user". Below it, a list box is open, showing "defaultList" as the selected option. To the right of "Authentication List" is an empty list box. At the bottom of the form area, there are two buttons: "Submit" and "Refresh".

11.2.1.4 Defining Forwarding Database

11.2.1.4.1. Configuring MAC Table aging interval time Page


Use this panel to set the Address Ageing Timeout for the forwarding database.

Configurable Data

Address Ageing Timeout (seconds) - The forwarding database contains static entries, which are never aged out, and dynamically learned entries, which are removed if they are not updated within a given time. You specify that time by entering a value for the Address Ageing Timeout. You may enter any number of seconds between 10 and 1000000. IEEE 802.1D recommends a default of 300 seconds, which is the factory default.

Command Buttons

Submit - Update the switch with the values on the screen. If you want the switch to retain the new values across a power cycle you must perform a save.

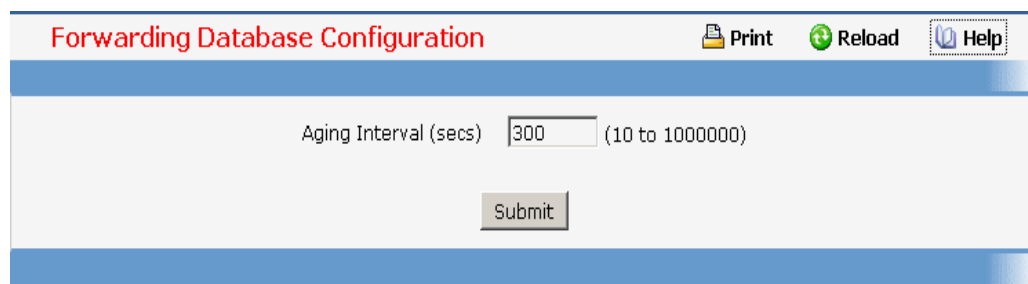

Forwarding Database Configuration

Print Reload Help

Aging Interval (secs) (10 to 1000000)

Submit

11.2.1.4.2. Viewing Forwarding Database Page

Use this panel to display information about entries in the forwarding database. These entries are used by the transparent bridging function to determine how to forward a received frame.

Selection Criteria

Management Unit ID - Displays management unit for which Forwarding Database Table is to be displayed.

Configurable Data

Filter - Specify the entries you want displayed.

Learned: If you choose "learned" only MAC addresses that have been learned will be displayed.

All: If you choose "all" the whole table will be displayed.

MAC Address Search - You may also search for an individual MAC address. Enter the two byte hexadecimal VLAN ID followed by the six byte hexadecimal MAC address in two-digit groups separated by colons, for example 01:23:45:67:89:AB:CD:EF where 01:23 is the VLAN ID and 45:67:89:AB:CD:EF is the MAC address. Then click on the search button. If the address exists, that entry will be displayed as the first entry followed by the remaining (greater) MAC addresses. An exact match is required.

Non-Configurable Data

MAC Address - A unicast MAC address for which the switch has forwarding and/or filtering information. The format is a two byte hexadecimal VLAN ID number followed by a six byte MAC address with each byte separated by colons. For example: 01:23:45:67:89:AB:CD:EF, where 01:23 is the VLAN ID and 45:67:89:AB:CD:EF is the MAC address.

Source Unit/Slot/Port - the port where this address was learned -- that is, the port through which the MAC address can be reached.

ifIndex - The ifIndex of the MIB interface table entry associated with the source port.

Status - The status of this entry. The possible values are:

Static: the entry was added when a static MAC filter was defined.

Learned: the entry was learned by observing the source MAC addresses of incoming traffic, and is currently in use.

Management: the system MAC address, which is identified with interface 0.1.

Self: the MAC address of one of the switch's physical interfaces.

Command Buttons

Search - Search for the specified MAC address.

Refresh - Refetch the database and display it again starting with the first entry in the table.

Forwarding Database Search

Management Unit: 1

Filter: All

MAC Address Search: Search

MAC Address	Source Unit/Slot/Port(s)	ifIndex	Status
00:01:00:08:74:C7:3B:D6	1/0/2	2	Learned
00:01:00:11:22:33:44:55	0/3/1	73	Management

Refresh

11.2.1.5 Viewing Logs

11.2.1.5.1. Viewing Buffered Log Configuration Page

This log stores messages in memory based upon the settings for message component and severity. On stackable systems, this log exists only on the top of stack platform. Other platforms in the stack forward their messages to the top of stack log.

Configurable Data

Admin Status - A log that is "Disabled" shall not log messages. A log that is "Enabled" shall log messages. Enable or Disable logging by selecting the corresponding line on the pulldown entry field.

Behavior Indicates the behavior of the log when it is full. It can either wrap around or stop when the log space is filled.

Command Buttons

Submit - Update the switch with the values you entered.

Buffered Log Configuration

Admin Status: Enabled

Behavior: Wrap

Submit

11.2.1.5.2. Viewing Buffered Log Page

This help message applies to the format of all logged messages which are displayed for the buffered log, persistent log, or console log.

Format of the messages

<15>Aug 24 05:34:05 STK0 MSTP[2110]: mspt_api.c(318) 237 %% Interface 12 transitioned to root state on message age timer expiry

-The above example indicates a user-level message (1) with severity 7 (debug) on a system that is not stack and generated by component MSTP running in thread id 2110 on Aug 24 05:34:05 by line 318 of file mspt_api.c. This is the 237th message logged. Messages logged to a collector or relay via syslog have an identical format to the above message.


Note for buffered log

Number of log messages displayed: For the buffered log, only the latest 128 entries are displayed on the webpage

Command Buttons

Refresh - Refresh the page with the latest log entries.

Clear Log - Clear all entries in the log.

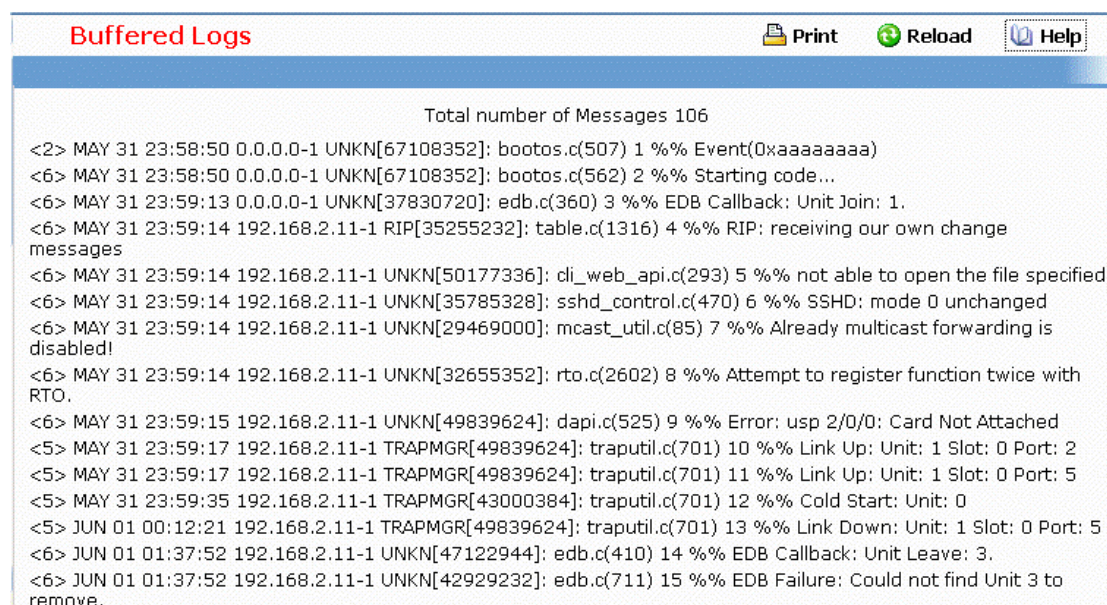

The screenshot shows a web interface titled "Buffered Logs". At the top right, there are buttons for "Print", "Reload", and "Help". Below the title bar, it states "Total number of Messages 106". The main content area displays a list of log messages, each starting with a severity indicator in angle brackets (e.g., <2>, <6>), followed by a timestamp, IP address, component name, line number, and a message description. The messages include events, starting codes, EDB callbacks, RIP messages, file opening errors, SSHD mode changes, multicast forwarding status, RTO registration attempts, card attachment errors, link up/down events, cold start events, and EDB failures.

```

<2> MAY 31 23:58:50 0.0.0.0-1 UNKN[67108352]: bootos.c(507) 1 %% Event(0xaaaaaaaa)
<6> MAY 31 23:58:50 0.0.0.0-1 UNKN[67108352]: bootos.c(562) 2 %% Starting code...
<6> MAY 31 23:59:13 0.0.0.0-1 UNKN[37830720]: edb.c(360) 3 %% EDB Callback: Unit Join: 1.
<6> MAY 31 23:59:14 192.168.2.11-1 RIP[35255232]: table.c(1316) 4 %% RIP: receiving our own change
messages
<6> MAY 31 23:59:14 192.168.2.11-1 UNKN[50177336]: dl_web_api.c(293) 5 %% not able to open the file specified
<6> MAY 31 23:59:14 192.168.2.11-1 UNKN[35785328]: sshd_control.c(470) 6 %% SSHD: mode 0 unchanged
<6> MAY 31 23:59:14 192.168.2.11-1 UNKN[29469000]: mcast_util.c(85) 7 %% Already multicast forwarding is
disabled!
<6> MAY 31 23:59:14 192.168.2.11-1 UNKN[32655352]: rto.c(2602) 8 %% Attempt to register function twice with
RTO.
<6> MAY 31 23:59:15 192.168.2.11-1 UNKN[49839624]: dapi.c(525) 9 %% Error: usp 2/0/0: Card Not Attached
<5> MAY 31 23:59:17 192.168.2.11-1 TRAPMGR[49839624]: traputil.c(701) 10 %% Link Up: Unit: 1 Slot: 0 Port: 2
<5> MAY 31 23:59:17 192.168.2.11-1 TRAPMGR[49839624]: traputil.c(701) 11 %% Link Up: Unit: 1 Slot: 0 Port: 5
<5> MAY 31 23:59:35 192.168.2.11-1 TRAPMGR[43000384]: traputil.c(701) 12 %% Cold Start: Unit: 0
<5> JUN 01 00:12:21 192.168.2.11-1 TRAPMGR[49839624]: traputil.c(701) 13 %% Link Down: Unit: 1 Slot: 0 Port: 5
<6> JUN 01 01:37:52 192.168.2.11-1 UNKN[47122944]: edb.c(410) 14 %% EDB Callback: Unit Leave: 3.
<6> JUN 01 01:37:52 192.168.2.11-1 UNKN[42929232]: edb.c(711) 15 %% EDB Failure: Could not find Unit 3 to
remove.
  
```



```
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 97 %% nimGetUnitSlotPort: internal interface number 183 out of range
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 98 %% nimGetUnitSlotPort: internal interface number 184 out of range
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 99 %% nimGetUnitSlotPort: internal interface number 185 out of range
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 100 %% nimGetUnitSlotPort: internal interface number 186 out of range
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 101 %% nimGetUnitSlotPort: internal interface number 187 out of range
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 102 %% nimGetUnitSlotPort: internal interface number 188 out of range
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 103 %% nimGetUnitSlotPort: internal interface number 189 out of range
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 104 %% nimGetUnitSlotPort: internal interface number 190 out of range
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 105 %% nimGetUnitSlotPort: internal interface number 191 out of range
<6> JUN 01 04:46:00 192.168.2.11-1 NIM[47122944]: nim_intf_map_api.c(378) 106 %% nimGetUnitSlotPort: internal interface number 192 out of range
```

[Refresh](#)[Clear Log](#)

11.2.1.5.3. Configuring Command Logger Page



Configurable Data

Admin Mode - Enable/Disable the operation of the CLI Command logging by selecting the corresponding pulldown field and clicking Submit.

Command Buttons

Submit - Update the switch with the values you entered.

Command Logger Configuration

 [Print](#) [Reload](#) [Help](#)

Admin Mode Disabled ▾

[Submit](#)

11.2.1.5.4. Configuring Console Log Page

This allows logging to any serial device attached to the host.

Configurable Data


Admin Status - A log that is "Disabled" shall not log messages. A log that is "Enabled" shall log messages. Enable or Disable logging by selecting the corresponding line on the pulldown entry field.

Severity Filter - A log records messages equal to or above a configured severity threshold. Select the severity option by selecting the corresponding line on the pulldown entry field. These severity levels have been enumerated below:

- Emergency (0): system is unusable
- Alert (1): action must be taken immediately
- Critical (2): critical conditions
- Error (3): error conditions
- Warning (4): warning conditions
- Notice(5): normal but significant conditions
- Informational(6): informational messages
- Debug(7): debug-level messages

Command Buttons

Submit - Update the switch with the values you entered.

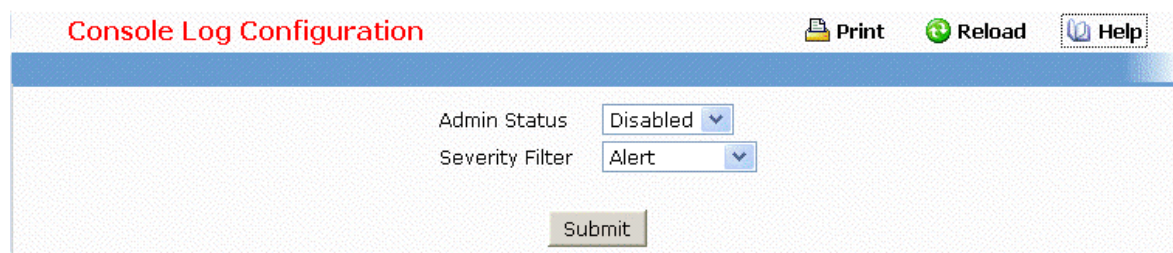

11.2.1.5.5. Viewing Event Log Page

Use this panel to display the event log, which is used to hold error messages for catastrophic events. After the event is logged and the updated log is saved in FLASH memory, the switch will be reset. The log can hold at least 2,000 entries (the actual number depends on the platform and OS), and is erased when an attempt is made to add an entry after it is full. The event log is preserved across system resets.

Non-Configurable Data

Entry - The number of the entry within the event log. The most recent entry is first.

Filename - The FASTPATH source code filename identifying the code that detected the event.

Line - The line number within the source file of the code that detected the event.

Task ID - The OS-assigned ID of the task reporting the event.


Code - The event code passed to the event log handler by the code reporting the event.

Time - The time the event occurred, measured from the previous reset.

Command Buttons

Refresh - Update the information on the page.

Clear Log - Remove all log information.

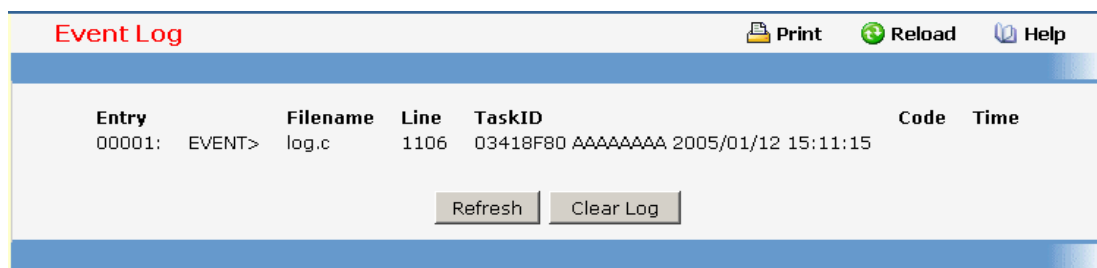

Entry	Filename	Line	TaskID	Code	Time
00001: EVENT>	log.c	1106	03418F80 AAAAAAAA		2005/01/12 15:11:15

11.2.1.5.6. Configuring Hosts configuration Page

Configurable Data

Host - This is a list of the hosts that have been configured for syslog. Select a host for changing the configuration or choose to add a new hosts from the drop down list.

IP Address - This is the ip address of the host configured for syslog.

Status -This specifies whether the host has been configured to be actively logging or not. Set the host to be active/out of service from the drop down menu.

Port -This is the port on the host to which syslog messages are sent. The default port is 514. Specify the port in the text field.

Severity Filter -A log records messages equal to or above a configured severity threshold. Select the severity option by selecting the corresponding line on the pulldown entry field. These severity levels have been enumerated below:


- Emergency (0): system is unusable
- Alert (1): action must be taken immediately
- Critical (2): critical conditions
- Error (3): error conditions
- Warning (4): warning conditions
- Notice(5): normal but significant conditions
- Informational(6): informational messages
- Debug(7): debug-level messages

Command Buttons

Submit - Update the switch with the values you entered.

Refresh - Refetch the database and display it again starting with the first entry in the table.

Delete - Delete a configured host.

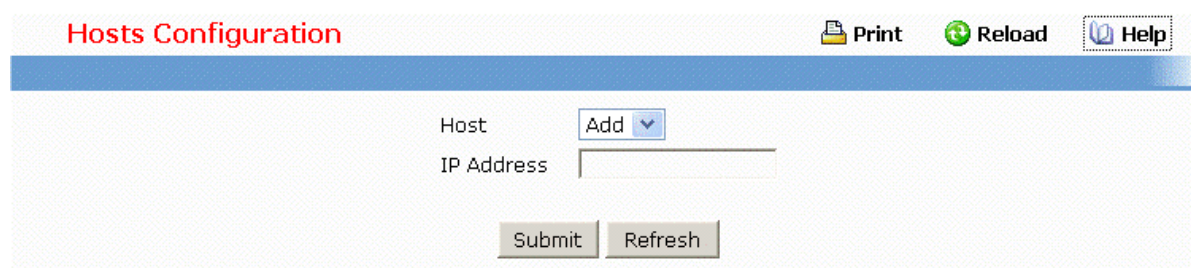

The Hosts Configuration interface features a title bar with 'Hosts Configuration' in red, and buttons for 'Print', 'Reload', and 'Help'. Below the title bar, there is a 'Host' label with an 'Add' dropdown button, an 'IP Address' text input field, and 'Submit' and 'Refresh' buttons at the bottom.

11.2.1.5.7. Configuring syslog configuration Page

Configurable Data

Admin Status - For Enabling and Disabling logging to configured syslog hosts. Setting this to disable stops logging to all syslog hosts. Disable means no messages will be sent to any collector/relay. Enable means messages will be sent to configured collector/relays using the values configured for each collector/relay. Enable/Disable the operation of the syslog function by selecting the corresponding line on the pulldown entry field.

Local UDP Port This is the port on the local host from which syslog messages are sent. The default port is 514. Specify the local port in the text field.

Non-Configurable Data


Messages Relayed - The count of syslog messages relayed.

Messages Ignored - The count of syslog messages ignored.

Command Buttons

Submit - Update the switch with the values you entered.

Refresh - Refetch the database and display it again starting with the first entry in the table.

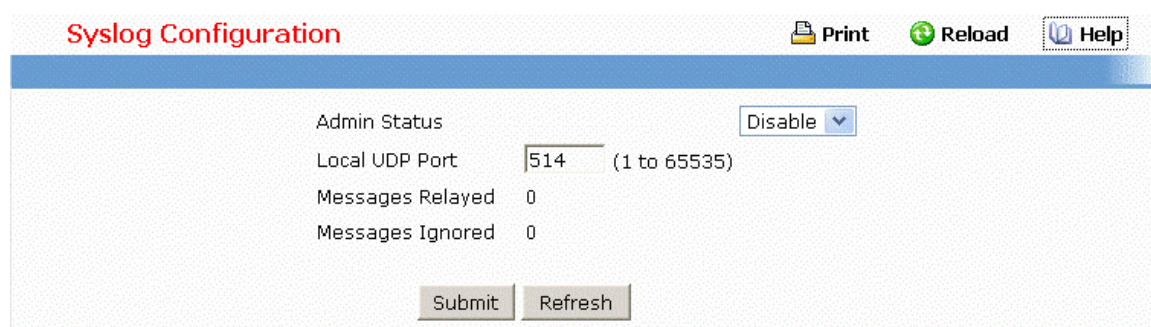

The Syslog Configuration interface features a title bar with 'Syslog Configuration' in red, and buttons for 'Print', 'Reload', and 'Help'. Below the title bar, there is an 'Admin Status' label with a 'Disable' dropdown button, a 'Local UDP Port' text input field with the value '514' and a range '(1 to 65535)', and 'Messages Relayed' and 'Messages Ignored' labels with the value '0'. At the bottom, there are 'Submit' and 'Refresh' buttons.

11.2.1.6 Managing Switch Interface

11.2.1.6.1. Configuring Switch Interface Page

Selection Criteria

Slot/Port - Selects the interface for which data is to be displayed or configured.

Configurable Data

STP Mode - The Select the Spanning Tree Protocol Administrative Mode for the port or **LAG**. The possible values are:

Enable - select this to enable the Spanning Tree Protocol for this port.

Disable - select this to disable the Spanning Tree Protocol for this port.

Admin Mode - Use the pulldown menu to select the Port control administration state. You must select enable if you want the port to participate in the network. The factory default is enabled.

IPv6 Mode - Enable or disable the port to forward IPv6 packets.

LACP Mode - Selects the Link Aggregation Control Protocol administration state. The mode must be enabled in order for the port to participate in Link Aggregation. May be enabled or disabled by selecting the corresponding line on the pulldown entry field. The factory default is enabled.

Physical Mode - Use the pulldown menu to select the port's speed and duplex mode. If you select auto the duplex mode and speed will be set by the auto-negotiation process. Note that the port's maximum capability (full duplex and 100 Mbps) will be advertised. Otherwise, your selection will determine the port's duplex mode and transmission rate. The factory default is auto. The selection when applied against the "All" option in Slot/Port is applied to all applicable interfaces only.

Link Trap - This object determines whether or not to send a trap when link status changes. The factory default is enabled.

Maximum Frame Size - The maximum Ethernet frame size the interface supports or is configured, including Ethernet header, CRC, and payload. (1518 to 9216). The default maximum frame size is 1518 .

Flow Control - Used to enable or disable flow control feature on the selected interface.

Broadcast Storm Control - Used to enable or disable the broadcast storm feature on the selected interface. The broadcast storm control value can be set to Level 1, Level 2, Level 3, and Level 4.

The following description is for the broadcast storm, multicast storm, and unicast storm control.

The actual packet rate for switch will convert from the input level and the speed of that interface. (see table 1 and table 2)

Table 1. For 10/100Mbps/1Gbps		Table 2. For 10Gbps	
Level	Packet Rate (pps)	Level	Packet Rate (pps)
1	64	1	1042
2	128	2	2048

3	256	3	3124
4	512	4	4167

Multicast Storm Control - Used to enable or disable the multicast storm feature on the selected interface. Multicast storm control value could be set Level 1, Level 2, Level 3, and Level 4.

Unicast Storm Control - Used to enable or disable unicast storm feature on the selected interface. Unicast storm control value could be set Level 1, Level 2, Level 3, and Level 4.

Capability - You could advertise the port capabilities of a given interface during auto-negotiation.

Non-Configurable Data

Port Type - For normal ports this field will be blank. Otherwise the possible values are:

Mon - the port is a monitoring port. Look at the Port Monitoring screens for more information.

LAG - the port is a member of a Link Aggregation trunk. Look at the LAG screens for more information.

Physical Status - Indicates the port speed and duplex mode.

Link Status - Indicates whether the Link is up or down.

ifIndex - The ifIndex of the interface table entry associated with this port.

Command Buttons

Submit - Update the switch with the values you entered. If you want the switch to retain the new values across a power cycle you must perform a save.

Port Configuration Print Reload Help

Slot/Port: All

Port Type:

STP Mode: Enable

Admin Mode: Enable

IPv6 Mode: Enable

LACP Mode: Enable

Physical Mode: Auto

Physical Status:

Link Status:

Link Trap: Enable

Maximum Frame Size: 1518 (1518 to 9216)

ifIndex:

Flow Control: Disable

Broadcast Storm Control: Disable

Multicast Storm Control: Disable

Unicast Storm Control: Disable

Capability:

- 10 Mbps Half Duplex
- 10 Mbps Full Duplex
- 100 Mbps Half Duplex
- 100 Mbps Full Duplex
- 1000 Mbps Full Duplex

11.2.1.6.2. Viewing Switch Interface Configuration Page

This screen displays the status for all ports in the box.

Selection Criteria

MST ID - Select the Multiple Spanning Tree instance ID from the list of all currently configured MST ID's to determine the values displayed for the Spanning Tree parameters. Changing the selected MST ID will generate a screen refresh. If Spanning Tree is disabled this will be a static value, CST, instead of a selector.

Non-Configurable Port Status Data

Slot/Port - Identifies the port

Port Type - For normal ports this field will be blank. Otherwise the possible values are:

Mon - this port is a monitoring port. Look at the Port Monitoring screens for more information.

LAG - the port is a member of a Link Aggregation trunk. Look at the LAG screens for more information.

STP Mode - The Spanning Tree Protocol Administrative Mode associated with the port or LAG. The possible values are:

Enable - spanning tree is enabled for this port.

Disable - spanning tree is disabled for this port.

Forwarding State - The port's current state Spanning Tree state. This state controls what

action a port takes on receipt of a frame. If the bridge detects a malfunctioning port it will place that port into the broken state. The other five states are defined in IEEE 802.1D:

Disabled
Blocking
Listening
Learning
Forwarding
Broken

Port Role - Each MST Bridge Port that is enabled is assigned a Port Role for each spanning tree. The port role will be one of the following values: Root Port, Designated Port, Alternate Port, Backup Port, Master Port, or Disabled Port.

Admin Mode - The Port control administration state. The port must be enabled in order for it to be allowed into the network. The factory default is enabled.

LACP Mode - Indicates the Link Aggregation Control Protocol administration state. The mode must be enabled in order for the port to participate in Link Aggregation.

Physical Mode - Indicates the port speed and duplex mode. In auto-negotiation mode the duplex mode and speed are set from the auto-negotiation process.

Physical Status - Indicates the port speed and duplex mode.

Link Status - Indicates whether the Link is up or down.

Link Trap - Indicates whether or not the port will send a trap when link status changes.

ifIndex - Indicates the ifIndex of the interface table entry associated with this port.

Flow Control - Indicates the status of flow control on this port.

Packet Burst - Indicates the packet burst used in the rate limit function if the rate limit admin mode is enabled.

Broadcast Storm Control - Indicates the status of the broadcast storm control, disable or Level 1, Level 2, Level 3, Level 4.

Multicast Storm Control - Indicates the status of the multicast storm control, disable or Level 1, Level 2, Level 3, Level 4.


Unicast Storm Control - Indicates the status of the unicast storm control, disable or Level 1, Level 2, Level 3, Level 4.


Capability - Indicates the port capabilities during auto-negotiation.


Command Buttons

Refresh – Refresh the configuration value again.

Port Summary

 Print

 Reload

 Help

MST ID : CST

Unit/Slot/Port	Port Type	STP Mode	Forwarding State	Port Role	Admin Mode	IPv6 Mode	LACP Mode
1/0/1		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/2		Disabled	Manual forwarding	Disabled	Enable	Enable	Enable
1/0/3		Disabled	Manual forwarding	Disabled	Enable	Enable	Enable
1/0/4		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/5		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/6		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/7		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/8		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/9		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/10		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/11		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/12		Disabled	Disabled	Disabled	Enable	Enable	Enable
1/0/13		Disabled	Disabled	Disabled	Enable	Enable	Enable

11.2.1.6.3. Configuring Multiple Port Mirroring Function Page

Configurable Data

Session ID - A session ID or "All Sessions" option may be selected. By default the First Session is selected.

Session Mode - Specifies the Session Mode for a selected session ID. By default Session Mode is enabled.

Source Port(s) - Specifies the configured port(s) as mirrored port(s). Traffic of the configured port(s) is sent to the probe port.

Destination Port - Acts as a probe port and will receive all the traffic from configured mirrored port(s). Default value is blank.

Command Buttons

Submit - Send the updated screen to the switch and cause the changes to take effect on the switch.

Delete - Remove the selected session configuration.

Multiple Port Mirroring

Print Reload Help

Session: 1

Mode: Disable

Source Port(s): 1/0/1, 1/0/2, 1/0/3, 1/0/4, 1/0/5, 1/0/6, 1/0/7, 1/0/8

Destination Port:

Submit Delete

11.2.1.7 Defining SNMP

11.2.1.7.1. Configuring SNMP Community Configuration Page

By default, two SNMP Communities exist:

- private, with 'Read/Write' privileges and status set to enable

- public, with 'Read Only' privileges and status set to enable

These are well-known communities, you can use this menu to change the defaults or to add other communities. Only the communities that you define using this menu will have access to the switch using the SNMPv1 and SNMPv2c protocols. Only those communities with read-write level access will have access to this menu via SNMP.

You should use this menu when you are using the SNMPv1 and SNMPv2c protocol: if you want to use SNMP v3 you should use the User Accounts menu.

Configurable Data

SNMP Community Name - You can use this screen to reconfigure an existing community, or to create a new one. Use this pulldown menu to select one of the existing community names, or select 'Create' to add a new one. A valid entry is a case-sensitive string of up to 16 characters. The default community names are *public* and *private*.

Client IP Address - Taken together, the Client IP Address and Client IP Mask denote a range of IP addresses from which SNMP clients may use that community to access this device. If either (IP Address or IP Mask) value is 0.0.0.0, access is allowed from any IP address. Otherwise, every client's IP address is ANDed with the mask, as is the Client IP Address, and, if the values are equal, access is allowed. For example, if the Client IP Address and Client IP Mask parameters are 192.168.1.0/255.255.255.0, then any client whose IP address is 192.168.1.0 through 192.168.1.255 (inclusive) will be allowed access. To allow access from only one station, use a Client IP Mask value of 255.255.255.255, and use that machine's IP address for Client IP Address.

Client IP Mask - Taken together, the Client IP Address and Client IP Mask denote a range of IP addresses from which SNMP clients may use that community to access this device. If either (IP Address or IP Mask) value is 0.0.0.0, access is allowed from any IP address. Otherwise, every client's IP address is ANDed with the mask, as is the Client IP Address, and, if the values are equal, access is allowed. For example, if the Client IP Address and

Client IP Mask parameters are 192.168.1.0/255.255.255.0, then any client whose IP address is 192.168.1.0 through 192.168.1.255 (inclusive) will be allowed access. To allow access from only one station, use a Client IP Mask value of 255.255.255.255, and use that machine's IP address for Client IP Address.


Access Mode - Specify the access level for this community by selecting Read/Write or Read Only from the pull down menu.

Status - Specify the status of this community by selecting Enable or Disable from the pull down menu. If you select enable, the Community Name must be unique among all valid Community Names or the set request will be rejected. If you select disable, the Community Name will become invalid.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

Delete - Delete the currently selected Community Name. If you want the switch to retain the new values across a power cycle, you must perform a save.

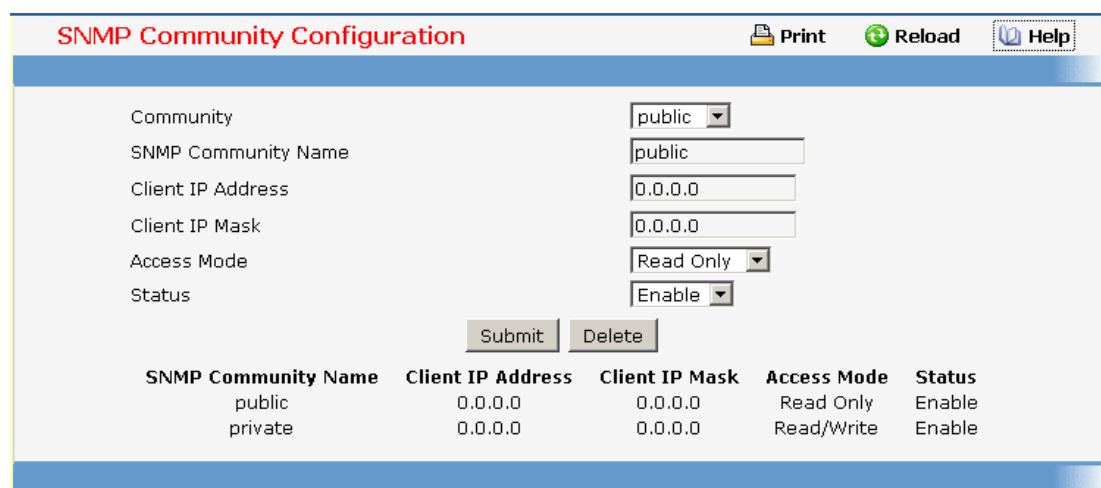

The screenshot shows the 'SNMP Community Configuration' web page. At the top, there are links for 'Print', 'Reload', and 'Help'. The main configuration area includes fields for 'Community' (a dropdown menu showing 'public'), 'SNMP Community Name' (a text input field with 'public'), 'Client IP Address' (a text input field with '0.0.0.0'), 'Client IP Mask' (a text input field with '0.0.0.0'), 'Access Mode' (a dropdown menu showing 'Read Only'), and 'Status' (a dropdown menu showing 'Enable'). Below these fields are 'Submit' and 'Delete' buttons. At the bottom, there is a table listing existing communities.

SNMP Community Name	Client IP Address	Client IP Mask	Access Mode	Status
public	0.0.0.0	0.0.0.0	Read Only	Enable
private	0.0.0.0	0.0.0.0	Read/Write	Enable

11.2.1.7.2. Configuring SNMP Trap Receiver Configuration Page

This menu will display an entry for every active Trap Receiver.

Configurable Data

SNMP Community Name - Enter the community string for the SNMP trap packet to be sent to the trap manager. This may be up to 16 characters and is case sensitive.

SNMP Version - Select the trap version to be used by the receiver from the pull down menu:

SNMP v1 - Uses SNMP v1 to send traps to the receiver.

SNMP v2 - Uses SNMP v2 to send traps to the receiver.

IP Address - Enter the IP address to receive SNMP traps from this device. Enter 4 numbers between 0 and 255 separated by periods.

Status - Select the receiver's status from the pulldown menu:


Enable - send traps to the receiver.

Disable - do not send traps to the receiver.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

Delete - Delete the currently selected Community Name. If you want the switch to retain the new values across a power cycle, you must perform a save.

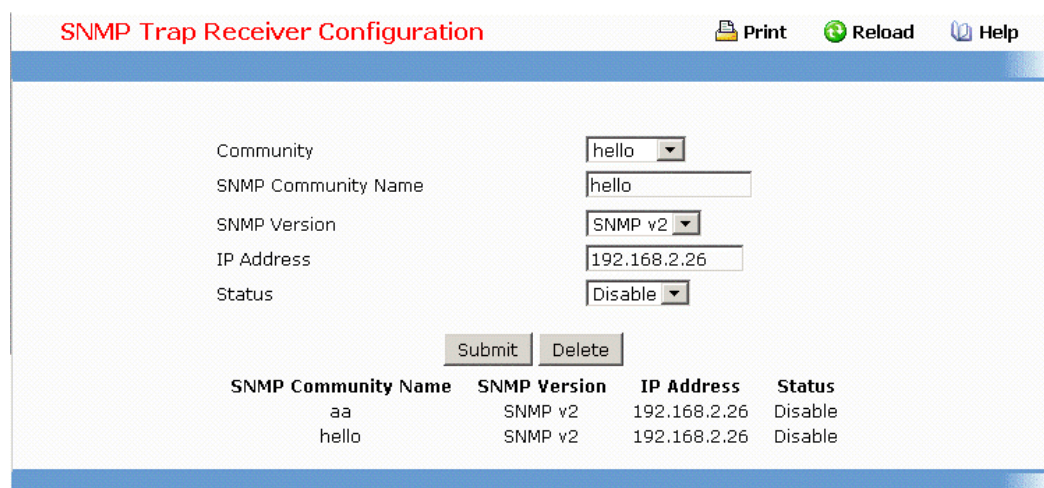

The screenshot shows the 'SNMP Trap Receiver Configuration' page. At the top, there are links for 'Print', 'Reload', and 'Help'. The configuration fields are as follows:

Field	Value
Community	hello
SNMP Community Name	hello
SNMP Version	SNMP v2
IP Address	192.168.2.26
Status	Disable

Below the fields are 'Submit' and 'Delete' buttons. At the bottom, there is a table showing the current configuration:

SNMP Community Name	SNMP Version	IP Address	Status
aa	SNMP v2	192.168.2.26	Disable
hello	SNMP v2	192.168.2.26	Disable

11.2.1.7.3. Viewing SNMP supported MIBs Page

This is a list of all the MIBs supported by the switch.

Non-configurable Data

Name - The RFC number if applicable and the name of the MIB.

Description - The RFC title or MIB description.

Command Buttons

Refresh - Update the data.

SNMP Supported MIBs		Print	Reload	Help
Name	Description			
RFC 1907 - SNMPv2-MIB	The MIB module for SNMPv2 entities			
RFC 2819 - RMON-MIB	Remote Network Monitoring Management Information Base			
QUANTA-MIB	QUANTA Reference			
SNMP-COMMUNITY-MIB	This MIB module defines objects to help support coexistence between SNMPv1, SNMPv2, and SNMPv3.			
SNMP-FRAMEWORK-MIB	The SNMP Management Architecture MIB			
SNMP-MPD-MIB	The MIB for Message Processing and Dispatching			
SNMP-NOTIFICATION-MIB	The Notification MIB Module			
SNMP-TARGET-MIB	The Target MIB Module			
SNMP-USER-BASED-SM-MIB	The management information definitions for the SNMP User-based Security Model.			
SNMP-VIEW-BASED-ACM-MIB	The management information definitions for the View-based Access Control Model for SNMP.			
USM-TARGET-TAG-MIB	SNMP Research, Inc.			
LAG-MIB	The Link Aggregation module for managing IEEE 802.3ad			
RFC 1213 - RFC1213-MIB	Management Information Base for Network Management of TCP/IP-based internets: MIB-II			
RFC 1493 - BRIDGE-MIB	Definitions of Managed Objects for Bridges (dot1d)			
RFC 1643 - Etherlike-MIB	Definitions of Managed Objects for the Ethernet-like Interface Types (dot3)			
RFC 2233 - IF-MIB	The Interfaces Group MIB using SMIv2			
RFC 2674 - P-BRIDGE-MIB	The Bridge MIB Extension module for managing Priority and Multicast Filtering, defined by IEEE 802.1D-1998.			
RFC 2674 - Q-BRIDGE-MIB	The VLAN Bridge MIB module for managing Virtual Bridged Local Area Networks			

11.2.1.8 Viewing Statistics

11.2.1.8.1. Viewing the whole Switch Detailed Statistics Page

Non-Configurable Data

ifIndex - This object indicates the ifIndex of the interface table entry associated with the Processor of this switch.

Octets Received - The total number of octets of data received by the processor (excluding framing bits but including FCS octets).

Packets Received Without Errors - The total number of packets (including broadcast packets and multicast packets) received by the processor.

Unicast Packets Received - The number of subnetwork-unicast packets delivered to a higher-layer protocol.

Multicast Packets Received - The total number of packets received that were directed to a multicast address. Note that this number does not include packets directed to the broadcast address.

Broadcast Packets Received - The total number of packets received that were directed to the broadcast address. Note that this does not include multicast packets.

Receive Packets Discarded - The number of inbound packets which were chosen to be discarded even though no errors had been detected to prevent their being deliverable to a

higher-layer protocol. A possible reason for discarding a packet could be to free up buffer space.

Octets Transmitted - The total number of octets transmitted out of the interface, including framing characters.

Packets Transmitted Without Errors - The total number of packets transmitted out of the interface.

Unicast Packets Transmitted - The total number of packets that higher-level protocols requested be transmitted to a subnetwork-unicast address, including those that were discarded or not sent.

Multicast Packets Transmitted - The total number of packets that higher-level protocols requested be transmitted to a Multicast address, including those that were discarded or not sent.

Broadcast Packets Transmitted - The total number of packets that higher-level protocols requested be transmitted to the Broadcast address, including those that were discarded or not sent.

Transmit Packets Discarded - The number of outbound packets which were chosen to be discarded even though no errors had been detected to prevent their being deliverable to a higher-layer protocol. A possible reason for discarding a packet could be to free up buffer space.

Most Address Entries Ever Used - The highest number of Forwarding Database Address Table entries that have been learned by this switch since the most recent reboot.

Address Entries in Use - The number of Learned and static entries in the Forwarding Database Address Table for this switch.

Maximum VLAN Entries - The maximum number of Virtual LANs (VLANs) allowed on this switch.

Most VLAN Entries Ever Used - The largest number of VLANs that have been active on this switch since the last reboot.

Static VLAN Entries - The number of presently active VLAN entries on this switch that have been created statically.

Dynamic VLAN Entries - The number of presently active VLAN entries on this switch that have been created by GVRP registration.


VLAN Deletes - The number of VLANs on this switch that have been created and then deleted since the last reboot.

Time Since Counters Last Cleared - The elapsed time, in days, hours, minutes, and seconds, since the statistics for this switch were last cleared.

Command Buttons

Clear Counters - Clear all the counters, resetting all switch summary and detailed statistics to default values. The discarded packets count cannot be cleared.

Refresh - Refresh the data on the screen with the present state of the data in the switch.

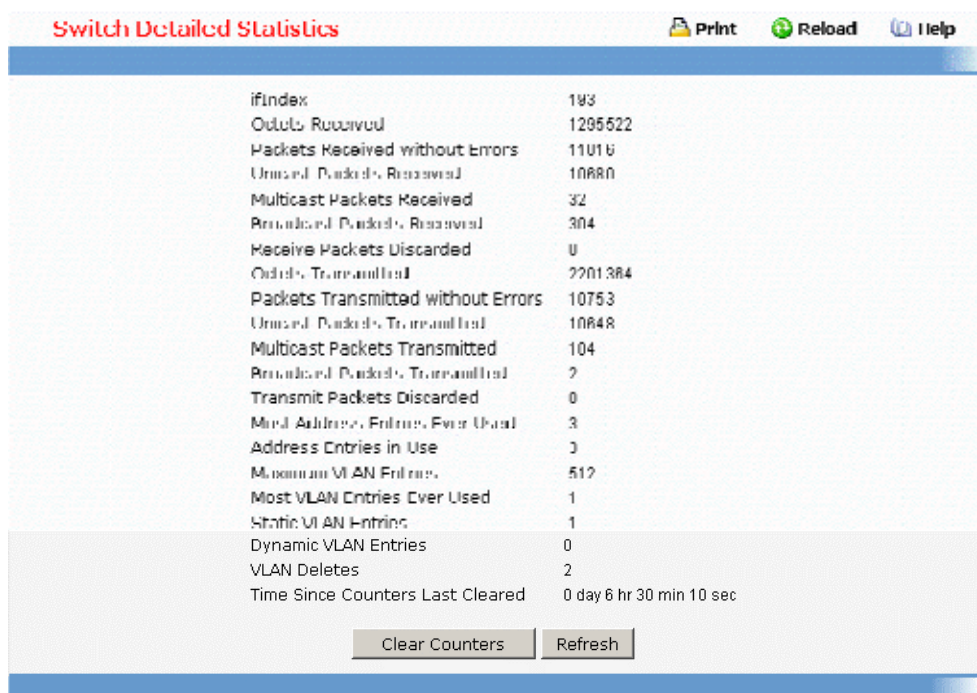

Switch Detailed Statistics		Print	Reload	Help
ifIndex	193			
Output Received	1295622			
Packets Received without Errors	11016			
Unicast Packets Received	10880			
Multicast Packets Received	32			
Broadcast Packets Received	304			
Receive Packets Discarded	0			
Output Transmitted	2201384			
Packets Transmitted without Errors	10753			
Unicast Packets Transmitted	10648			
Multicast Packets Transmitted	104			
Broadcast Packets Transmitted	2			
Transmit Packets Discarded	0			
Max Address Entries Ever Used	3			
Address Entries in Use	3			
Maximum VLAN Entries	512			
Most VLAN Entries Ever Used	1			
Static VLAN Entries	1			
Dynamic VLAN Entries	0			
VLAN Deletes	2			
Time Since Counters Last Cleared	0 day 6 hr 30 min 10 sec			
<input type="button" value="Clear Counters"/> <input type="button" value="Refresh"/>				

11.2.1.8.2. Viewing the whole Switch Summary Statistics Page

Non-Configurable Data

ifIndex - This object indicates the ifIndex of the interface table entry associated with the Processor of this switch.

Packets Received Without Errors - The total number of packets (including broadcast packets and multicast packets) received by the processor.

Broadcast Packets Received - The total number of packets received that were directed to the broadcast address. Note that this does not include multicast packets.

Packets Received with Errors - The number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.

Packets Transmitted Without Errors - The total number of packets transmitted out of the interface.

Broadcast Packets Transmitted - The total number of packets that higher-level protocols requested to be transmitted to the Broadcast address, including those that were discarded or not sent.

Transmit Packet Errors - The number of outbound packets that could not be transmitted because of errors.

Address Entries Currently in Use - The total number of Forwarding Database Address Table entries now active on the switch, including learned and static entries.

VLAN Entries Currently in Use - The number of VLAN entries presently occupying the VLAN table.

Time Since Counters Last Cleared - The elapsed time, in days, hours, minutes, and seconds since the statistics for this switch were last cleared.

Command Buttons

Clear Counters - Clear all the counters, resetting all summary and switch detailed statistics to defaults. The discarded packets count cannot be cleared.

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Switch Summary Statistics	
ifIndex	193
Total Packets Received without Errors	12481
Broadcast Packets Received	307
Packets Received with Errors	0
Packets Transmitted without Errors	12244
Broadcast Packets Transmitted	2
Transmit Packet Errors	0
Address Entries Currently in Use	3
VLAN Entries Currently in Use	1
Time Since Counters Last Cleared	0 day 6 hr 35 min 56 sec

Controller time: 2005/11/24 15:48:49

11.2.1.8.3. Viewing Each Port Detailed Statistics Page

Selection Criteria

Slot/Port - Selects the interface for which data is to be displayed or configured.

Non-Configurable Data

ifIndex - This object indicates the ifIndex of the interface table entry associated with this port on an adapter.

Packets RX and TX 64 Octets - The total number of packets (including bad packets) received or transmitted that were 64 octets in length (excluding framing bits but including FCS octets).

Packets RX and TX 65-127 Octets - The total number of packets (including bad packets) received or transmitted that were between 65 and 127 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 128-255 Octets - The total number of packets (including bad packets) received or transmitted that were between 128 and 255 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 256-511 Octets - The total number of packets (including bad packets) received or transmitted that were between 256 and 511 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 512-1023 Octets - The total number of packets (including bad packets) received or transmitted that were between 512 and 1023 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 1024-1518 Octets - The total number of packets (including bad packets) received or transmitted that were between 1024 and 1518 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 1519-1522 Octets - The total number of packets (including bad packets) received or transmitted that were between 1519 and 1522 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 1523-2047 Octets - The total number of packets (including bad packets) received or transmitted that were between 1523 and 2047 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 2048-4095 Octets - The total number of packets (including bad packets) received or transmitted that were between 2048 and 4095 octets in length inclusive (excluding framing bits but including FCS octets).

Packets RX and TX 4096-9216 Octets - The total number of packets (including bad packets) received or transmitted that were between 4096 and 9216 octets in length inclusive (excluding framing bits but including FCS octets).

Octets Received - The total number of octets of data (including those in bad packets) received on the network (excluding framing bits but including FCS octets). This object can be used as a reasonable estimate of ethernet utilization. If greater precision is desired, the etherStatsPkts and etherStatsOctets objects should be sampled before and after a common interval.

Packets Received 64 Octets - The total number of packets (including bad packets) received that were 64 octets in length (excluding framing bits but including FCS octets).

Packets Received 65-127 Octets - The total number of packets (including bad packets) received that were between 65 and 127 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received 128-255 Octets - The total number of packets (including bad packets) received that were between 128 and 255 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received 256-511 Octets - The total number of packets (including bad packets) received that were between 256 and 511 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received 512-1023 Octets - The total number of packets (including bad packets) received that were between 512 and 1023 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received 1024-1518 Octets - The total number of packets (including bad packets) received that were between 1024 and 1518 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Received > 1522 Octets - The total number of packets received that were longer than 1522 octets (excluding framing bits, but including FCS octets) and were otherwise well formed.

Total Packets Received Without Errors - The total number of packets received that were without errors.

Unicast Packets Received - The number of subnetwork-unicast packets delivered to a higher-layer protocol.

Multicast Packets Received - The total number of good packets received that were directed to a multicast address. Note that this number does not include packets directed to the broadcast address.

Broadcast Packets Received - The total number of good packets received that were directed to the broadcast address. Note that this does not include multicast packets.

Total Packets Received with MAC Errors - The total number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.

Jabbers Received - The total number of packets received that were longer than 1518 octets (excluding framing bits, but including FCS octets), and had either a bad Frame Check Sequence (FCS) with an integral number of octets (FCS Error) or a bad FCS with a non-integral number of octets (Alignment Error). Note that this definition of jabber is different than the definition in IEEE-802.3 section 8.2.1.5 (10BASE5) and section 10.3.1.4 (10BASE2). These documents define jabber as the condition where any packet exceeds 20 ms. The allowed range to detect jabber is between 20 ms and 150 ms.

Fragments Received - The total number of packets received that were less than 64 octets in length with ERROR CRC(excluding framing bits but including FCS octets).

Undersize Received - The total number of packets received that were less than 64 octets in length with GOOD CRC(excluding framing bits but including FCS octets).

Alignment Errors - The total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, but had a bad Frame Check Sequence (FCS) with a non-integral number of octets.

Rx FCS Errors - The total number of packets received that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, but had a bad Frame Check Sequence (FCS) with an integral number of octets

Overruns - The total number of frames discarded as this port was overloaded with incoming packets, and could not keep up with the inflow.

Total Packets Transmitted (Octets) - The total number of octets of data (including those in bad packets) transmitted on the network (excluding framing bits but including FCS octets). This object can be used as a reasonable estimate of ethernet utilization. If greater precision is desired, the etherStatsPkts and etherStatsOctets objects should be sampled before and after a common interval.

Packets Transmitted 64 Octets - The total number of packets (including bad packets) received that were 64 octets in length (excluding framing bits but including FCS octets).

Packets Transmitted 65-127 Octets - The total number of packets (including bad packets) received that were between 65 and 127 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 128-255 Octets - The total number of packets (including bad packets) received that were between 128 and 255 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 256-511 Octets - The total number of packets (including bad packets) received that were between 256 and 511 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 512-1023 Octets - The total number of packets (including bad packets) received that were between 512 and 1023 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 1024-1518 Octets - The total number of packets (including bad packets) received that were between 1024 and 1518 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 1523-2047 Octets - The total number of packets (including bad packets) received that were between 1523 and 2047 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 2048-4095 Octets - The total number of packets (including bad packets) received that were between 2048 and 4095 octets in length inclusive (excluding framing bits but including FCS octets).

Packets Transmitted 4096-9216 Octets - The total number of packets (including bad packets) received that were between 4096 and 9216 octets in length inclusive (excluding framing bits but including FCS octets).

Maximum Frame Size - The maximum ethernet frame size the interface supports or is configured, including ethernet header, CRC, and payload. (1518 to 9216). The default maximum frame size is 1518 .

Total Packets Transmitted Successfully - The number of frames that have been transmitted by this port to its segment.

Unicast Packets Transmitted - The total number of packets that higher-level protocols requested be transmitted to a subnetwork-unicast address, including those that were discarded or not sent.

Multicast Packets Transmitted - The total number of packets that higher-level protocols requested be transmitted to a Multicast address, including those that were discarded or not sent.

Broadcast Packets Transmitted - The total number of packets that higher-level protocols requested be transmitted to the Broadcast address, including those that were discarded or not sent.

Total Transmit Errors - The sum of Single, Multiple, and Excessive Collisions.

Tx FCS Errors - The total number of packets transmitted that had a length (excluding framing bits, but including FCS octets) of between 64 and 1518 octets, inclusive, but had a bad Frame Check Sequence (FCS) with an integral number of octets

Tx Oversized - The total number of frames that exceeded the max permitted frame size. This counter has a max increment rate of 815 counts per sec at 10 Mb/s.

Underrun Errors - The total number of frames discarded because the transmit FIFO buffer became empty during frame transmission.

Total Transmit Packets Discarded - The sum of single collision frames discarded, multiple collision frames discarded, and excessive frames discarded.

Single Collision Frames - A count of the number of successfully transmitted frames on a particular interface for which transmission is inhibited by exactly one collision.

Multiple Collision Frames - A count of the number of successfully transmitted frames on a particular interface for which transmission is inhibited by more than one collision.

Excessive Collision Frames - A count of frames for which transmission on a particular interface fails due to excessive collisions.

STP BPDUs Received - Number of STP BPDUs received at the selected port.

STP BPDUs Transmitted - Number of STP BPDUs transmitted from the selected port.

RSTP BPDUs Received - Number of RSTP BPDUs received at the selected port.

RSTP BPDUs Transmitted - Number of RSTP BPDUs transmitted from the selected port.

MSTP BPDUs Received - Number of MSTP BPDUs received at the selected port.

MSTP BPDUs Transmitted - Number of MSTP BPDUs transmitted from the selected port.

GVRP PDUs Received - The count of GVRP PDUs received in the GARP layer.

GVRP PDUs Transmitted - The count of GVRP PDUs transmitted from the GARP layer.

GVRP Failed Registrations - The number of times attempted GVRP registrations could not be completed.

GMRP PDUs Received - The count of GMRP PDUs received from the GARP layer.

GMRP PDUs Transmitted - The count of GMRP PDUs transmitted from the GARP layer.

GMRP Failed Registrations - The number of times attempted GMRP registrations could not be completed.

Time Since Counters Last Cleared - The elapsed time, in days, hours, minutes, and seconds since the statistics for this port were last cleared.

Command Buttons

Clear Counters - Clear all the counters, resetting all statistics for this port to default values.

Clear All Counters - Clear all the counters for all ports, resetting all statistics for all ports to default values.

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Port Detailed Statistics		Print	Reload	Help
Unit/Slot/Port	1/0/1			
ifIndex	1			
Packets RX and TX 64 Octets	42139			
Packets RX and TX 65-127 Octets	22504			
Packets RX and TX 128-255 Octets	152			
Packets RX and TX 256-511 Octets	21617			
Packets RX and TX 512-1023 Octets	133			
Packets RX and TX 1024-1518 Octets	517			
Packets RX and TX 1519-2047 Octets	0			
Packets RX and TX 2048-4095 Octets	0			
Packets RX and TX 4096-9216 Octets	0			
Octets Received	3312984			
Packets Received 64 Octets	21228			
Packets Received 65-127 Octets	20726			
Packets Received 128-255 Octets	79			
Packets Received 256-511 Octets	1269			
Packets Received 512-1023 Octets	39			
Packets Received 1024-1518 Octets	0			
Packets Received > 1522 Octets	0			
Total Packets Received without Errors	43341			
Unicast Packets Received	42981			
Multicast Packets Received	8			
Broadcast Packets Received	352			
Total Packets Received with MAC Errors	0			
Jabbers Received	0			
Fragments Received	0			
Undersize Received	0			
Undersize Received	0			
Alignment Errors	0			
Rx FCS Errors	0			
Overruns	0			
Total Packets Transmitted (Octets)	7758174			
Packets Transmitted 64 Octets	20911			
Packets Transmitted 65-127 Octets	1778			
Packets Transmitted 128-255 Octets	73			
Packets Transmitted 256-511 Octets	20348			
Packets Transmitted 512-1023 Octets	94			
Packets Transmitted 1024-1518 Octets	517			

Total Packets Transmitted Successfully	43721
Unicast Packets Transmitted	43096
Multicast Packets Transmitted	416
Broadcast Packets Transmitted	209
Total Transmit Errors	0
Tx FCS Errors	0
Tx Oversized	0
Underrun Errors	0
Total Transmit Packets Discarded	0
Single Collision Frames	0
Multiple Collision Frames	0
Excessive Collision Frames	0
Port Membership Discards	0
STP BPDUs Received	0
STP BPDUs Transmitted	0
RSTP BPDUs Received	0
RSTP BPDUs Transmitted	0
MSTP BPDUs Received	0
MSTP BPDUs Transmitted	0
GVRP PDUs Received	0
GVRP PDUs Transmitted	0
GVRP Failed Registrations	0
GMRP PDUs Received	0
GMRP PDUs Transmitted	0
GMRP Failed Registrations	0
Time Since Counters Last Cleared	0 day 6 hr 38 min 43 sec

11.2.1.8.4. Viewing Each Port Summary Statistics Page

Selection Criteria

Slot/Port - Selects the interface for which data is to be displayed or configured.

Non-Configurable Data

ifIndex - This object indicates the ifIndex of the interface table entry associated with this port on an adapter.

Total Packets Received without Errors - The total number of packets received that were without errors.

Packets Received with Errors - The number of inbound packets that contained errors preventing them from being deliverable to a higher-layer protocol.

Broadcast Packets Received - The total number of good packets received that were directed to the broadcast address. Note that this does not include multicast packets.

Packets Transmitted without Errors - The number of frames that have been transmitted by this port to its segment.

Transmit Packet Errors - The number of outbound packets that could not be transmitted because of errors.

Collision Frames - The best estimate of the total number of collisions on this Ethernet segment.

Time Since Counters Last Cleared - The elapsed time, in days, hours, minutes, and seconds since the statistics for this port were last cleared.

Command Buttons

Clear Counters - Clears all the counters, resetting all statistics for this port to default values.

Clear All Counters - Clears all the counters for all ports, resetting all statistics for all ports to default values.

Refresh – Refreshes the data on the screen with the present state of the data in the switch.

Port Summary Statistics	
Slot/Port	0/1
ifIndex	1
Total Packets Received without Errors	0
Packets Received with Errors	0
Broadcast Packets Received	0
Packets Transmitted without Errors	0
Transmit Packet Errors	0
Collision Frames	0
Time Since Counters Last Cleared	0 day 3 hr 23 min 56 sec

Clear Counters Clear All Counters Refresh

11.2.1.9 Managing System Utilities

11.2.1.9.1. Saving All Configuration Changed Page

Command Buttons

Save - Click this button to have configuration changes you have made saved across a system reboot. All changes submitted since the previous save or system reboot will be retained by the switch.

Save All Applied Changes


Saving all applied changes will cause all changes to configuration panels that were applied, but not saved, to be saved, thus retaining their new values across a system reboot.

Save

11.2.1.9.2. Resetting the Switch Page

Command Buttons


Reset - Select this button to reboot the switch. Any configuration changes you have made since the last time you issued a save will be lost. You will be shown a confirmation screen after you select the button.

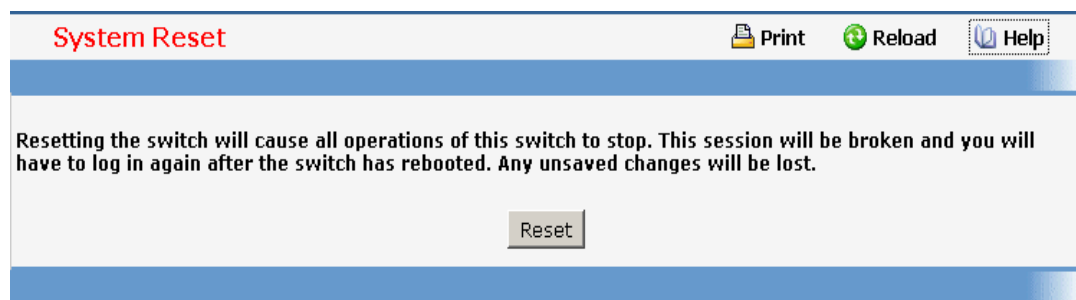

11.2.1.9.3. Restoring All Configuration to Default Values Page

Command Buttons


Reset - Clicking the Reset button will reset all of the system login passwords to their default values. If you want the switch to retain the new values across a power cycle, you must perform a save.

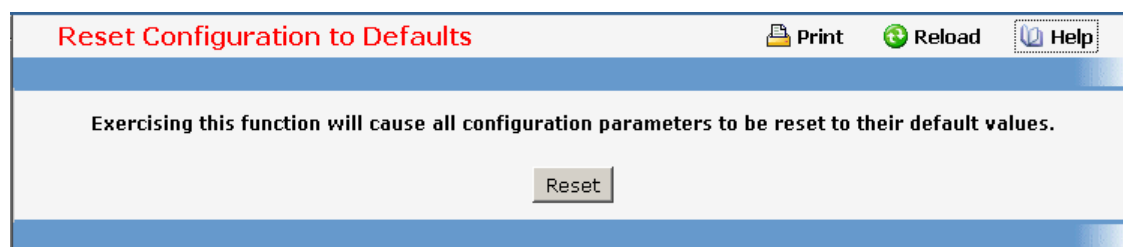

11.2.1.9.4. Resetting the Passwords to Default Values Page

Command Buttons

Reset - Select this button to have all passwords reset to their factory default values.

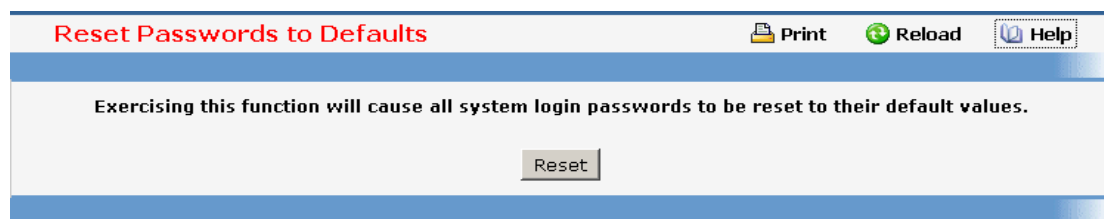

11.2.1.9.5. Downloading Specific Files to Switch Flash Page

Use this menu to download a file to the switch.

Configurable Data

File Type - Specify what type of file you want to download:

Script - specify configuration script when you want to update the switch's script file.

CLI Banner - Specify the banner that you want to display before user login to the switch.

Code – Specify code when you want to upgrade the operational flash.

Configuration - Specify configuration when you want to update the switch's configuration. If the file has errors the update will be stopped.

SSH-1 RSA Key File - SSH-1 Rivest-Shamir-Adleman (RSA) Key File

SSH-2 RSA Key PEM File - SSH-2 Rivest-Shamir-Adleman (RSA) Key File (PEM Encoded)

SSH-2 DSA Key PEM File - SSH-2 Digital Signature Algorithm (DSA) Key File (PEM Encoded)

SSL Trusted Root Certificate PEM File - SSL Trusted Root Certificate File (PEM Encoded)

SSL Server Certificate PEM File - SSL Server Certificate File (PEM Encoded)

SSL DH Weak Encryption Parameter PEM File - SSL Diffie-Hellman Weak Encryption Parameter File (PEM Encoded)

SSL DH Strong Encryption Parameter PEM File - SSL Diffie-Hellman Strong Encryption Parameter File (PEM Encoded)

The factory default is code.

Note that to download SSH key files SSH must be administratively disabled and there can be no active SSH sessions.

TFTP Server IP Address - Enter the IP address of the TFTP server. The factory default is 0.0.0.0.

TFTP File Path (Target) - Enter the path on the TFTP server where the selected file is located. You may enter up to 32 characters. The factory default is blank.

TFTP File Name (Source) - Enter the name on the TFTP server of the file you want to download. You may enter up to 32 characters. The factory default is blank.

TFTP File Name (Target) - Enter the name on the switch of the file you want to save. You may enter up to 32 characters. The factory default is blank.

Start File Transfer - To initiate the download you need to check this box and then select the submit button.

Non-Configurable Data

The last row of the table is used to display information about the progress of the file transfer. The screen will refresh automatically until the file transfer completes.

Command Buttons

Submit - Send the updated screen to the switch and perform the file download.

11.2.1.9.6. Uploading Specific Files from Switch Flash Page

Use this menu to upload a code, configuration, or log file from the switch.

Configurable Data

File Type - Specify the type of file you want to upload. The available options are Script, Code, CLI Banner, Configuration, Error Log, Buffered Log, and Trap Log. The factory default is Error Log.

TFTP Server IP Address - Enter the IP address of the TFTP server. The factory default is 0.0.0.0

TFTP File Path (Target) - Enter the path on the TFTP server where you want to put the file being uploaded. You may enter up to 32 characters. The factory default is blank.

TFTP File Name (Target) - Enter the name you want to give the file being uploaded. You may enter up to 32 characters. The factory default is blank.

TFTP File Name (Source) - Specify the file which you want to upload from the switch.


Start File Transfer - To initiate the upload you need to check this box and then select the submit button.

Non-Configurable Data

The last row of the table is used to display information about the progress of the file transfer. The screen will refresh automatically until the file transfer completes.

Command Buttons

Submit - Send the updated screen to the switch and perform the file upload.

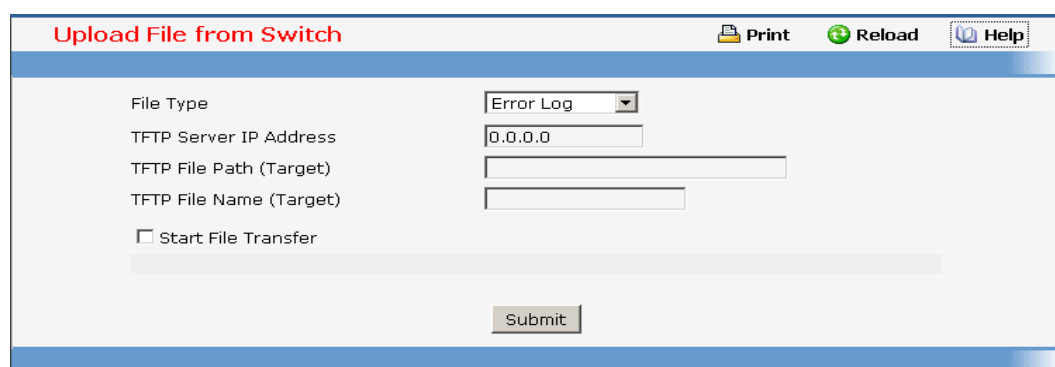

11.2.1.9.7. Defining Configuration and Runtime Startup File Page

Specify the file used to start up the system.

Configurable Data

Configuration File - Configuration files.

Runtime File - Run-time operation codes.

Command Buttons

Submit - Send the updated screen to the switch and specify the file start-up.

Start-Up File Print Reload Help

Current Configuration File	default.cfg
Current Runtime File	lb1-r-0.4.1213.biz
Configuration File	default.cfg
Runtime File	lb1-r-0.4.1213.biz

11.2.1.9.8. Removing Specific File Page

Delete files in flash. If the file type is used for system startup, then this file cannot be deleted.

Configurable Data

Configuration File - Configuration files.

Runtime File - Run-time operation codes.

Script File - Configuration script files.

Command Buttons

Remove File - Send the updated screen to the switch and perform the file remove.

Remove File Print Reload Help

Configuration File	
Runtime File	
Script File	

11.2.1.9.9. Copying Running Configuration to Flash Page

Use this menu to copy a start-up configuration file from the running configuration file on switch.

Configurable Data


File Name - Enter the name you want to give the file being copied. You may enter up to 32 characters. The factory default is blank.

Non-Configurable Data

The last row of the table is used to display information about the progress of the file copy. The screen will refresh automatically until the file copy completes.

Command Buttons

Copy to File - Send the updated screen to the switch perform the file copy.

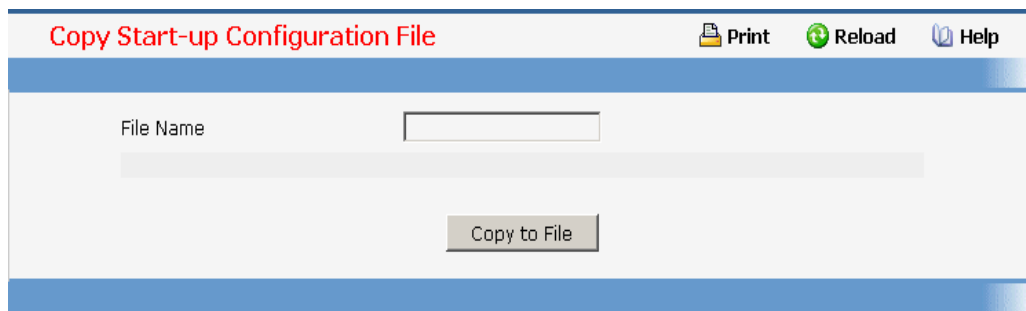

The interface for copying the start-up configuration file. It features a title bar with 'Copy Start-up Configuration File' in red, and buttons for 'Print', 'Reload', and 'Help'. Below the title bar is a text input field labeled 'File Name'. At the bottom center is a 'Copy to File' button.

11.2.1.9.10. Defining Ping Function Page


Use this screen to tell the switch to send a Ping request to a specified IP address. You can use this to check whether the switch can communicate with a particular IP station. Once you click the Submit button, the switch will send three pings and the results will be displayed below the configurable data. If a reply to the ping is not received, you will see **No Reply Received from IP xxx.xxx.xxx.xxx**, otherwise you will see **Reply received from IP xxx.xxx.xxx.xxx : (send count = 5, receive count = n)**.

Configurable Data

IP Address - Enter the IP address of the station you want the switch to ping. The initial value is blank. The IP Address you enter is not retained across a power cycle.

Command Buttons

Submit - This will initiate the ping.

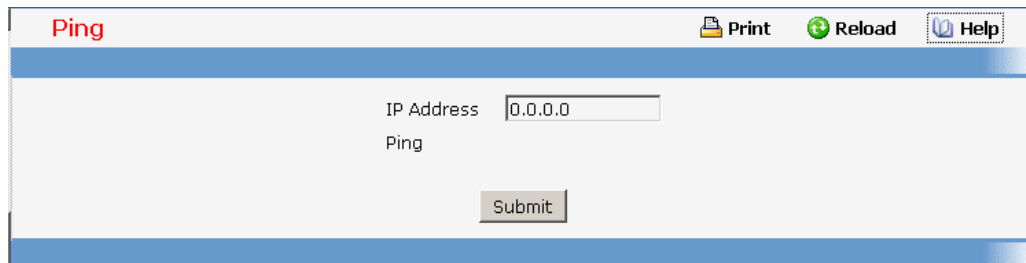

The interface for sending a ping. It features a title bar with 'Ping' in red, and buttons for 'Print', 'Reload', and 'Help'. Below the title bar is a text input field labeled 'IP Address' with the value '0.0.0.0'. Below that is a 'Ping' label. At the bottom center is a 'Submit' button.

11.2.1.9.11. Managing CDP Function

Defining CDP Configuration Page

Use this menu to configure the parameters for CDP, which is used to discover a CISCO device on the LAN.

Configurable Data

Admin Mode - CDP administration mode which are Enable and Disable.

Hold Time - the legal time period of a received CDP packet.


Transmit Interval - the CDP packet sending interval.

Port Authen. State - the CDP administration mode for all ports which are Enable and

Disable.

Command Buttons

Submit - Send the updated screen to the switch. Changes take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

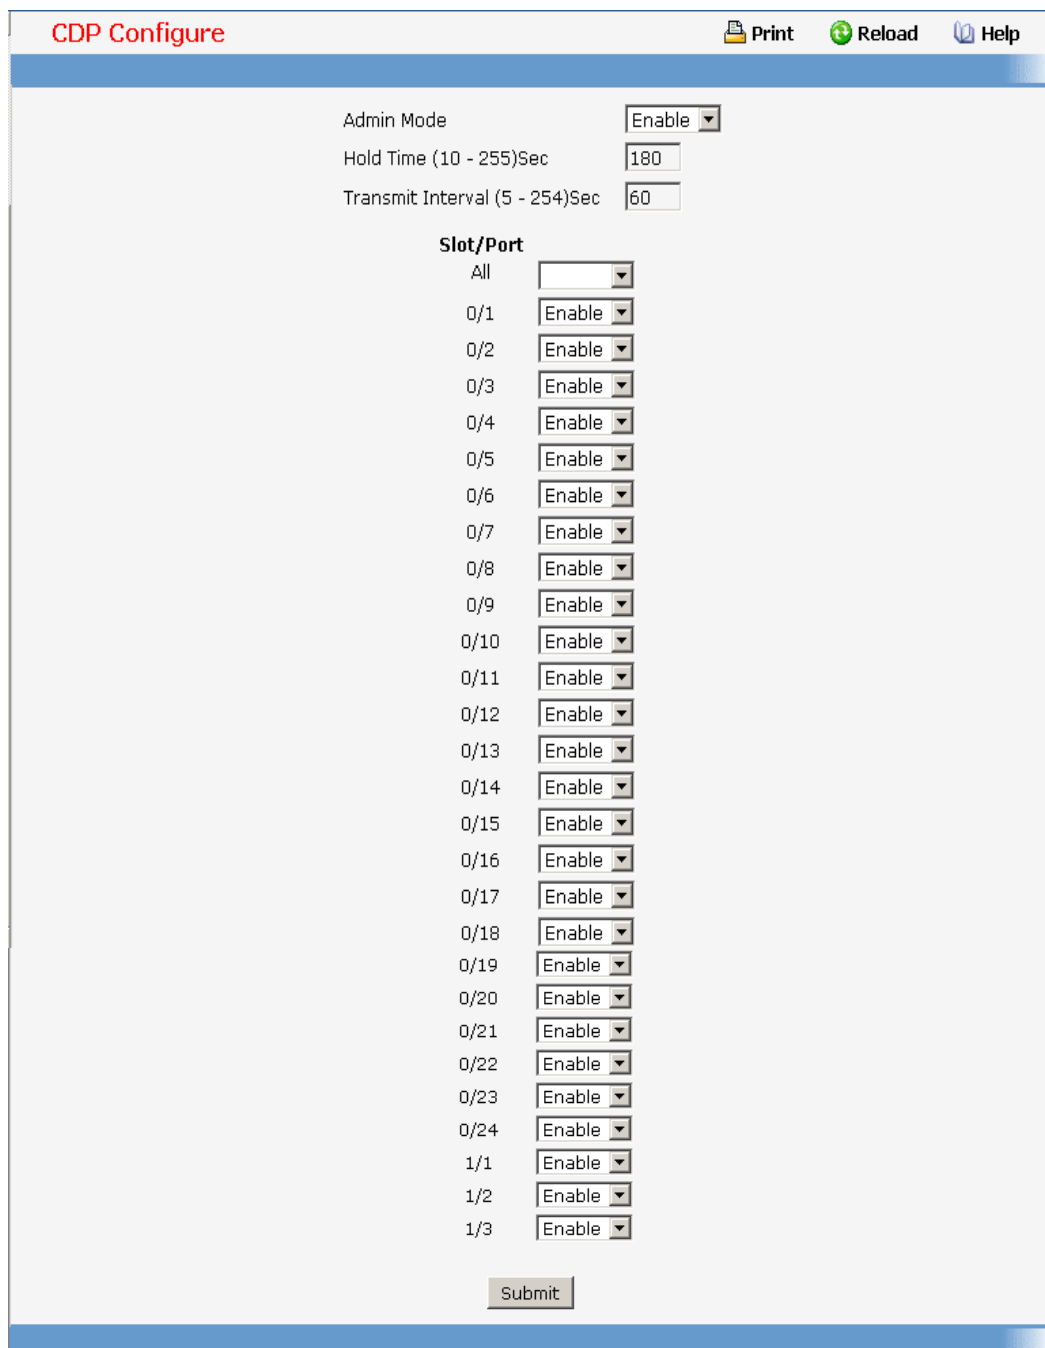

The screenshot shows the 'CDP Configure' web interface. At the top, there are three icons: 'Print', 'Reload', and 'Help'. The main configuration area includes three settings: 'Admin Mode' set to 'Enable', 'Hold Time (10 - 255)Sec' set to '180', and 'Transmit Interval (5 - 254)Sec' set to '60'. Below these is a section titled 'Slot/Port' with a list of ports from 'All' to '1/3'. Each port has a dropdown menu, all of which are currently set to 'Enable'. At the bottom of the form is a 'Submit' button.

Slot/Port	Configuration
All	[Dropdown]
0/1	Enable
0/2	Enable
0/3	Enable
0/4	Enable
0/5	Enable
0/6	Enable
0/7	Enable
0/8	Enable
0/9	Enable
0/10	Enable
0/11	Enable
0/12	Enable
0/13	Enable
0/14	Enable
0/15	Enable
0/16	Enable
0/17	Enable
0/18	Enable
0/19	Enable
0/20	Enable
0/21	Enable
0/22	Enable
0/23	Enable
0/24	Enable
1/1	Enable
1/2	Enable
1/3	Enable

Viewing Neighbors Information Page

Non-Configurable Data

Use this menu to display CDP neighbors device information in the LAN.

Command Buttons

Clear - Clear all the counters, resetting all switch summary and detailed statistics to default values. The discarded packets count cannot be cleared.

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Neighbors Information							Print	Reload	Help
CDP Neighbors Information									
Capability Codes :									
R - Router, T - Trans Bridge, B - Source Route Bridge									
S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone									
Device ID	Intf	Time	Capability	Platform	Port ID				
2950G	74	233	S T	cisco WS-C2950T-24	GigabitEthernet0/1				
2950G	74	233	S T	cisco WS-C2950T-24	GigabitEthernet0/2				
							Clear	Refresh	

Viewing Traffic Statistics Page

Use this menu to display CDP traffic statistics.

Non-Configurable Data

Incoming Packet Number - Received legal CDP packets number from neighbors.

Outgoing Packet Number - Transmitted CDP packets number from this device.

Error Packet Number - Received illegal CDP packets number from neighbors.

Command Buttons

Clear Counters - Clear all the counters, resetting all switch summary and detailed statistics to default values. The discarded packets count cannot be cleared.

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Traffic Statistics		Print	Reload	Help
Incoming Packet Number		36		
Outgoing Packet Number		434		
Error Packet Number		0		
		Clear Counters	Refresh	

11.2.1.10 Defining Trap Manager

11.2.1.10.1. Configuring Trap Flags Page

Use this menu to specify which traps you want to enable. When the condition identified by an active trap is encountered by the switch a trap message will be sent to any enabled SNMP Trap Receivers, and a message will be written to the trap log.

Configurable Data

Authentication - Enable or disable activation of authentication failure traps by selecting the corresponding line on the pull down entry field. The factory default is enabled.

Link Up/Down - Enable or disable activation of link status traps by selecting the corresponding line on the pull down entry field. The factory default is enabled.

Multiple Users - Enable or disable activation of multiple user traps by selecting the corresponding line on the pull down entry field. The factory default is enabled. This trap is triggered when the same user ID is logged into the switch more than once at the same time (either via telnet or the serial port).

Spanning Tree - Enable or disable activation of spanning tree traps by selecting the corresponding line on the pull down entry field. The factory default is enabled.

OSPF Traps - Enabled or disable activation of OSPF traps by selecting the corresponding line on the pulldown entry field. The factory default is disabled. This field can be configured only if the OSPF admin mode is enabled.

DVMRP Traps - Enabled or disable activation of DVMRP traps by selecting the corresponding line on the pulldown entry field. The factory default is disabled.

PIM Traps - Enabled or disable activation of PIM traps by selecting the corresponding line on the pulldown entry field. The factory default is disabled.

Command Buttons

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch. These changes will not be retained across a power cycle unless a save is performed.

The screenshot shows a web interface titled "Trap Flags Configuration" in red text. At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". Below the title bar, there is a table with two columns. The first column lists the trap types: Authentication, Link Up/Down, Multiple Users, Spanning Tree, OSPF Traps, DVMRP Traps, and PIM Traps. The second column contains dropdown menus for each trap type, with the current selection being "Enable" for the first four and "Disable" for the last three. At the bottom center of the form is a "Submit" button.

Trap Type	Status
Authentication	Enable
Link Up/Down	Enable
Multiple Users	Enable
Spanning Tree	Enable
OSPF Traps	Disable
DVMRP Traps	Disable
PIM Traps	Disable

Submit

11.2.1.10.2. Viewing Trap Log Page

This screen lists the entries in the trap log. The information can be retrieved as a file by using System Utilities, Upload File from Switch.

Non-Configurable Data

Number of Traps since last reset - The number of traps that have occurred since the switch were last reset.

Trap Log Capacity - The maximum number of traps stored in the log. If the number of traps exceeds the capacity, the entries will overwrite the oldest entries.

Log - The sequence number of this trap.

System Up Time - The time at which this trap occurred, expressed in days, hours, minutes and seconds since the last reboot of the switch.

Trap - Information identifying the trap.

Command Buttons

Clear Log - Clear all entries in the log. Subsequent displays of the log will only show new log entries.

Trap Log			Print	Reload	Help
Number of Traps Since Last Reset			783		
Trap Log Capacity			256		
Number of Traps Since Log Last Viewed			527		
Log	System Up Time	Trap			
0	2005/11/24 16:20:35	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
1	2005/11/24 16:20:01	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
2	2005/11/24 16:19:28	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
3	2005/11/24 16:18:54	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
4	2005/11/24 16:18:21	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
5	2005/11/24 16:17:47	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
6	2005/11/24 16:17:13	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
7	2005/11/24 16:16:40	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
8	2005/11/24 16:16:06	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
9	2005/11/24 16:15:33	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
10	2005/11/24 16:14:59	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
11	2005/11/24 16:14:25	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
12	2005/11/24 16:13:52	Fan Status: FAN 1 is inactive. (count1=0, count2=60).			
			Clear Log		

11.2.1.11 Configuring SNTP

11.2.1.11.1. Configuring SNTP Global Configuration Page

Configurable Data

Client Mode - Specifies the mode of operation of SNTP Client. An SNTP client may operate in one of the following modes.

- **Disable** - SNTP is not operational. No SNTP requests are sent from the client nor are any received SNTP messages processed.
- **Unicast** - SNTP operates in a point to point fashion. A unicast client sends a request to a designated server at its unicast address and expects a reply from which it

can determine the time and, optionally the round-trip delay and local clock offset relative to the server.

- **Broadcast** - SNTP operates in the same manner as multicast mode but uses a local broadcast address instead of a multicast address. The broadcast address has a single subnet scope while a multicast address has Internet wide scope.

Default value is Disable.

Port - Specifies the local UDP port to listen for responses/broadcasts. Allowed range is (1 to 65535). Default value is 123.

Unicast Poll Interval - Specifies the number of seconds between unicast poll requests expressed as a power of two when configured in unicast mode. Allowed range is (6 to 10). Default value is 6.

Broadcast Poll Interval - Specifies the number of seconds between broadcast poll requests expressed as a power of two when configured in broadcast mode. Broadcasts received prior to the expiry of this interval are discarded. Allowed range is (6 to 10). Default value is 6.

Unicast Poll Timeout - Specifies the number of seconds to wait for an SNTP response when configured in unicast mode. Allowed range is (1 to 30). Default value is 5.

Unicast Poll Retry - Specifies the number of times to retry a request to an SNTP server after the first time-out before attempting to use the next configured server when configured in unicast mode. Allowed range is (0 to 10). Default value is 1.

Command Buttons

Submit - Sends the updated configuration to the switch. Configuration changes take effect immediately.

SNTP Global Configuration		Print	Reload	Help
Client Mode	Disable			
Port	123 (1 to 65535)			
Unicast Poll Interval	6 (6 to 10)			
Broadcast Poll Interval	6 (6 to 10)			
Unicast Poll Timeout	5 (1 to 30)			
Unicast Poll Retry	1 (0 to 10)			
Submit				

11.2.1.11.2. Viewing SNTP Global Status Page

Non-Configurable Data

Version - Specifies the SNTP Version the client supports.

Supported Mode - Specifies the SNTP modes the client supports. Multiple modes may be supported by a client.

Last Update Time - Specifies the local date and time (UTC) the SNTP client last updated the system clock.

Last Attempt Time - Specifies the local date and time (UTC) of the last SNTP request or receipt of an unsolicited message.

Last Attempt Status - Specifies the status of the last SNTP request or unsolicited message for both unicast and broadcast modes. If no message has been received from a server, a status of Other is displayed. These values are appropriate for all operational modes.

- **Other**None of the following enumeration values.
- **Success**The SNTP operation was successful and the system time was updated.
- **Request Timed Out**A directed SNTP request timed out without receiving a response from the SNTP server.
- **Bad Date Encoded**The time provided by the SNTP server is not valid.
- **Version Not Supported**The SNTP version supported by the server is not compatible with the version supported by the client.
- **Server Unsynchronized**The SNTP server is not synchronized with its peers. This is indicated via the 'leap indicator' field on the SNTP message.
- **Server Kiss Of Death**The SNTP server indicated that no further queries were to be sent to this server. This is indicated by a stratum field equal to 0 in a message received from a server.

Server IP Address - Specifies the IP address of the server for the last received valid packet. If no message has been received from any server, an empty string is shown.

Address Type - Specifies the address type of the SNTP Server address for the last received valid packet.

Server Stratum - Specifies the claimed stratum of the server for the last received valid packet.

Reference Clock Id - Specifies the reference clock identifier of the server for the last received valid packet.

Server Mode - Specifies the mode of the server for the last received valid packet.

Unicast Sever Max Entries - Specifies the maximum number of unicast server entries that can be configured on this client.

Unicast Server Current Entries - Specifies the number of current valid unicast server entries configured for this client.

Broadcast Count - Specifies the number of unsolicited broadcast SNTP messages that have been received and processed by the SNTP client since last reboot.

SNTP Global Status		Print	Reload	Help
Version	4			
Supported Mode	Unicast & Broadcast			
Last Update Time	JAN 01 00:00:00 1970			
Last Attempt Time	JAN 01 00:00:00 1970			
Last Attempt Status	Other			
Server IP Address	0.0.0.0			
Address Type	Unknown			
Server Stratum	0 - Unspecified			
Reference Clock Id				
Server Mode	Reserved			
Unicast Server Max Entries	3			
Unicast Server Current Entries	0			
Broadcast Count	0			

11.2.1.11.3. Configuring SNTP Server Page

Configurable Data

Server - Specifies all the existing Server Addresses along with an additional option "Create". When the user selects "Create" another text box "Address" appears where the user may enter Address for Server to be configured.

Address - Specifies the address of the SNTP server. This is a text string of up to 64 characters containing the encoded unicast IP address or hostname of a SNTP server. Unicast SNTP requests will be sent to this address. If this address is a DNS hostname, then that hostname should be resolved into an IP address each time a SNTP request is sent to it.

Address Type - Specifies the address type of the configured SNTP Server address. Allowed types are :

- **Unknown**
- **IPV4**
- **DNS**

Default value is Unknown

Port - Specifies the port on the server to which SNTP requests are to be sent. Allowed range is (1 to 65535). Default value is 123.

Priority - Specifies the priority of this server entry in determining the sequence of servers to which SNTP requests will be sent. The client continues sending requests to different servers until a successful response is received or all servers are exhausted. This object indicates the order in which to query the servers. A server entry with a precedence of 1 will be queried before a server with a priority of 2, and so forth. If more than one server has the same priority then the requesting order will follow the lexicographical ordering of the entries in this table. Allowed range is (1 to 3). Default value is 1.

Version - Specifies the NTP Version running on the server. Allowed range is (1 to 4). Default value is 4.

Command Buttons

Submit - Sends the updated configuration to the switch. Configuration changes take effect immediately.

Delete - Deletes the SNTP Server entry. Sends the updated configuration to the switch. Configuration changes take effect immediately.

The screenshot shows a web-based configuration page for an SNTP server. The title is 'SNTP Server Configuration' in red text. To the right of the title are three icons: a printer for 'Print', a circular arrow for 'Reload', and a book for 'Help'. The main content area has a light blue header. Below it, there are several input fields: 'Address' with a 'Create' dropdown menu, an empty 'Address' text box, 'Address Type' with a 'Unknown' dropdown menu, 'Port' with the value '123' and a range '(1 to 65535)', 'Priority' with the value '1' and a range '(1 to 3)', and 'Version' with the value '4' and a range '(1 to 4)'. At the bottom of the form are two buttons: 'Submit' and 'Delete'.

11.2.1.11.4. Viewing SNTP Server Status Page

Non-Configurable Data

Address - Specifies all the existing Server Addresses. If no Server configuration exists, a message saying "No SNTP server exists" flashes on the screen.

Last Update Time - Specifies the local date and time (UTC) that the response from this server was used to update the system clock.

Last Attempt Time - Specifies the local date and time (UTC) that this SNTP server was last queried.


Last Attempt Status - Specifies the status of the last SNTP request to this server. If no packet has been received from this server, a status of Other is displayed.

- **Other**None of the following enumeration values.
- **Success**The SNTP operation was successful and the system time was updated.
- **Request Timed Out**A directed SNTP request timed out without receiving a response from the SNTP server.
- **Bad Date Encoded**The time provided by the SNTP server is not valid.
- **Version Not Supported**The SNTP version supported by the server is not compatible with the version supported by the client.
- **Server Unsynchronized**The SNTP server is not synchronized with its peers. This is indicated via the 'leap indicator' field on the SNTP message.
- **Server Kiss Of Death**The SNTP server indicated that no further queries were

to be sent to this server. This is indicated by a stratum field equal to 0 in a message received from a server.

Unicast Server Num Requests - Specifies the number of SNTP requests made to this server since last time agent reboot.

Unicast Server Num Failed Requests - Specifies the number of failed SNTP requests made to this server since last reboot.

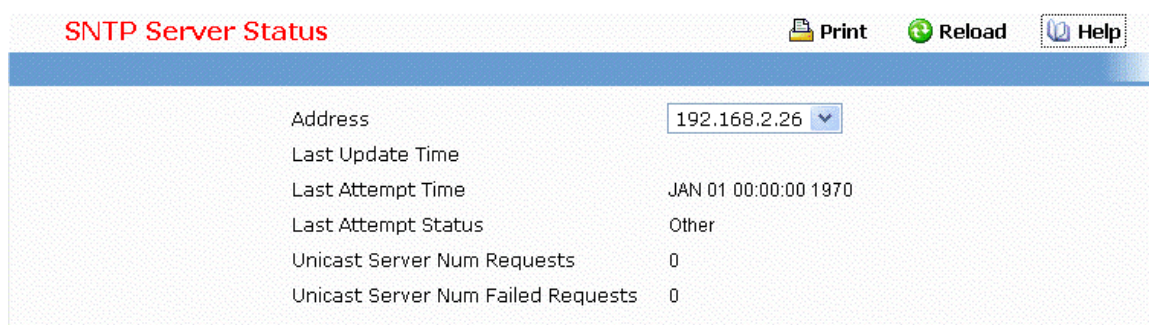

SNTP Server Status		Print	Reload	Help
Address	192.168.2.26			
Last Update Time				
Last Attempt Time	JAN 01 00:00:00 1970			
Last Attempt Status	Other			
Unicast Server Num Requests	0			
Unicast Server Num Failed Requests	0			

11.2.1.11.5. Configuring Current Time Settings Page

Configurable Data

Year - Year (4-digit). (Range: 2000 - 2099).

Month - Month. (Range: 1 - 12).

Day - Day of month. (Range: 1 - 31).


Hour - Hour in 24-hour format. (Range: 0 - 23).

Minute - Minute. (Range: 0 - 59).

Second - Second. (Range: 0 - 59).

Command Buttons

Submit - Send the updated screen to the switch. Changes take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

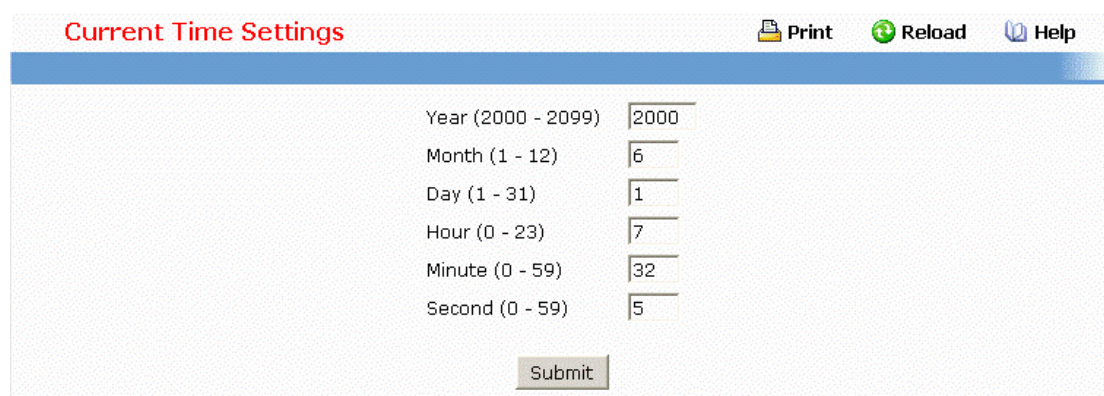

Current Time Settings [Print](#) [Reload](#) [Help](#)

Year (2000 - 2099)	<input type="text" value="2000"/>
Month (1 - 12)	<input type="text" value="6"/>
Day (1 - 31)	<input type="text" value="1"/>
Hour (0 - 23)	<input type="text" value="7"/>
Minute (0 - 59)	<input type="text" value="32"/>
Second (0 - 59)	<input type="text" value="5"/>

11.2.1.11.6. Configuring Time Zone Settings Page

Simple Network Time Protocol (SNTP) allows the switch to set its internal clock based on periodic updates from a time server. Maintaining an accurate time on the switch enables the system log to record meaningful dates and times for event entries. You can also manually set the clock using the CLI. If the clock is not set, the switch will only record the time from the factory default set at the last bootup.

Configurable Data

Time Zone Name - The name of time zone, usually an acronym. (Range: 1-15 characters).


Time Zone Hours - The number of hours before/after UTC. (Range: 0-12 hours).

Time Zone Minutes - The number of minutes before/after UTC. (Range: 0-59 minutes).

- before-utc - Sets the local time zone before (east) of UTC
- after-utc - Sets the local time zone after (west) of UTC

Command Buttons

Submit - Send the updated screen to the switch. Changes take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

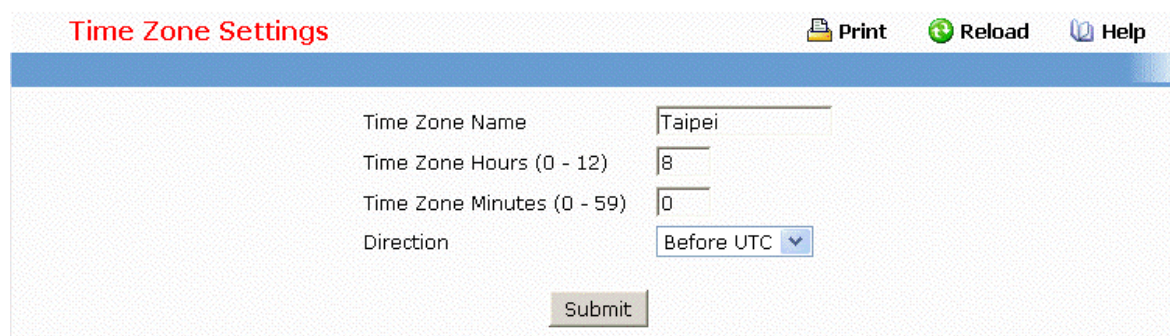

Time Zone Settings [Print](#) [Reload](#) [Help](#)

Time Zone Name	<input type="text" value="Taipei"/>
Time Zone Hours (0 - 12)	<input type="text" value="8"/>
Time Zone Minutes (0 - 59)	<input type="text" value="0"/>
Direction	<input type="button" value="Before UTC"/>


11.2.1.12 Defining DHCP Client

11.2.1.12.1. Configuring DHCP Restart Page

This command issues a BOOTP or DHCP client request for any IP interface that has been set to BOOTP or DHCP mode via the IP address command. DHCP requires the server to reassign the client's last address if available. If the BOOTP or DHCP server has been moved to a different domain, the network portion of the address provided to the client will be based on this new domain.

Command Buttons

Reset - Send the updated screen to the switch to restart the DHCP client.

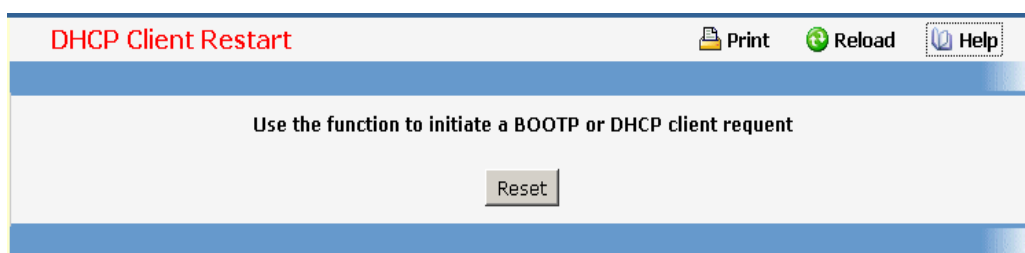

11.2.1.12.2. Configuring DHCP Client-identifier Page

Specify the DHCP client identifier for the switch. The DHCP client identifier is used to include a client identifier in all communications with the DHCP server. The identifier type depends on the requirements of your DHCP server.

Non-Configurable Data

Current DHCP Identifier (Hex/Text) - Shows the current setting of DHCP identifier.

Configurable Data

DHCP Identifier - Specifies the type of DHCP Identifier.


- **Default**
- **Specific Text String**
- **Specific Hexadecimal Value**

Text String - A text string.

Hex Value - The hexadecimal value.

Command Buttons

Submit - Send the updated screen to the switch perform the setting DHCP client identifier.

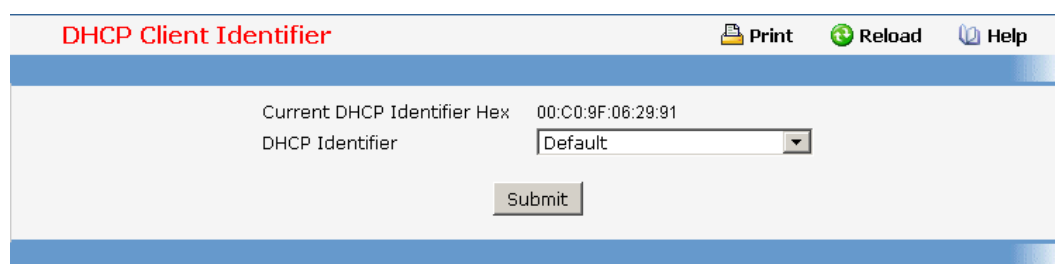

DHCP Client Identifier

Print Reload Help

Current DHCP Identifier Hex 00:C0:9F:06:29:91

DHCP Identifier Default

Submit

11.2.2 Switching Menu

11.2.2.1 Managing Port-based VLAN

11.2.2.1.1 Configuring Port-based VLAN Configuration Page

Selection Criteria

VLAN ID and Name - You can use this screen to reconfigure an existing VLAN, or to create a new one. Use this pull down menu to select one of the existing VLANs, or select 'Create' to add a new one.

Configurable Data

VLAN ID - Specify the VLAN Identifier for the new VLAN. (You can only enter data in this field when you are creating a new VLAN.) The range of the VLAN ID is (1 to 3965).

VLAN Name - Use this optional field to specify a name for the VLAN. It can be up to 32 alphanumeric characters, including blanks. The default is blank. VLAN ID 1 always has a name of 'Default'.

VLAN Type - This field identifies the type of the VLAN you are configuring. You cannot change the type of the default VLAN (VLAN ID = 1): it is always type 'Default'. When you create a VLAN, using this screen, its type will always be 'Static'. A VLAN that is created by GVRP registration initially has a type of 'Dynamic'. You may use this pull down menu to change its type to 'Static'.

Participation - Use this field to specify whether a port will participate in this VLAN. The factory default is 'Autodetect'. The possible values are:

- Include - This port is always a member of this VLAN. This is equivalent to registration fixed in the IEEE 802.1Q standard.
- Exclude - This port is never a member of this VLAN. This is equivalent to registration forbidden in the IEEE 802.1Q standard.
- Autodetect - Specifies that port may be dynamically registered in this VLAN via GVRP. The port will not participate in this VLAN unless it receives a GVRP request. This is equivalent to registration normal in the IEEE 802.1Q standard.

Tagging - Select the tagging behavior for this port in this VLAN. The factory default is 'Untagged'. The possible values are:

Tagged - all frames transmitted for this VLAN will be tagged.

Untagged - all frames transmitted for this VLAN will be untagged.

Non-Configurable Data

Slot/Port - Indicates which port is associated with the fields on this line.




Status - Indicates the current value of the participation parameter for the port.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

Delete - Delete this VLAN. You are not allowed to delete the default VLAN.

VLAN Configuration

 Print
  Reload
  Help

VLAN ID and Name 30 -

VLAN ID 30

VLAN Name

VLAN Type Static

Slot/Port	Status	Participation	Tagging
All			
0/1	Exclude	Autodetect	Untagged
0/2	Exclude	Autodetect	Untagged
0/3	Exclude	Autodetect	Untagged
0/4	Exclude	Autodetect	Untagged
0/5	Exclude	Autodetect	Untagged
0/6	Exclude	Autodetect	Untagged
0/7	Exclude	Autodetect	Untagged
0/8	Exclude	Autodetect	Untagged
0/9	Exclude	Autodetect	Untagged
0/10	Exclude	Autodetect	Untagged
0/11	Exclude	Autodetect	Untagged
0/12	Exclude	Autodetect	Untagged
0/13	Exclude	Autodetect	Untagged
0/14	Exclude	Autodetect	Untagged
0/15	Exclude	Autodetect	Untagged
0/16	Exclude	Autodetect	Untagged
0/17	Exclude	Autodetect	Untagged
0/18	Exclude	Autodetect	Untagged
0/19	Exclude	Autodetect	Untagged
0/20	Exclude	Autodetect	Untagged
0/21	Exclude	Autodetect	Untagged
0/22	Exclude	Autodetect	Untagged
0/23	Exclude	Autodetect	Untagged
0/24	Exclude	Autodetect	Untagged
1/1	Exclude	Autodetect	Untagged
1/2	Exclude	Autodetect	Untagged
1/3	Exclude	Autodetect	Untagged

Delete
Submit

11.2.2.1.2. Viewing Port-based VLAN Information Page

This page displays the status of all currently configured VLANs.

VLAN ID - The VLAN Identifier (VID) of the VLAN. The range of the VLAN ID is (1 to 3965).

VLAN Name - The name of the VLAN. VLAN ID 1 is always named `Default`.

VLAN Type - The VLAN type:

Default (VLAN ID = 1) -- always present

Static -- a VLAN you have configured

Dynamic -- a VLAN created by GVRP registration that you have not converted to static, and that GVRP may therefore remove.

VLAN Status				Print	Reload	Help
VLAN ID	VLAN Name	VLAN Type	Slot/Port			
1	Default	Default	0/1 ,0/2 ,0/3 ,0/4 ,0/5 ,0/7 ,0/9 ,0/10 ,0/11 ,0/12 ,0/13 ,0/15 ,0/17 ,0/19 ,0/20 ,0/21 ,0/23			
30		Static				
40		Static				
50		Static				

11.2.2.1.3. Configuring VLAN Port Configuration Page

Selection Criteria

Slot/Port - Select the physical interface for which you want to display or configure data. Select 'All' to set the parameters for all ports to same values.

Configurable Data

Port VLAN ID - Specify the VLAN ID you want assigned to untagged or priority tagged frames received on this port. The factory default is 1.

Acceptable Frame Types - Specify how you want the port to handle untagged and priority tagged frames. If you select 'VLAN only', the port will discard any untagged or priority tagged frames it receives. If you select 'Admit All', untagged and priority tagged frames received on the port will be accepted and assigned the value of the Port VLAN ID for this port. Whichever you select, VLAN tagged frames will be forwarded in accordance with the IEEE 802.1Q VLAN standard. The factory default is 'Admit All'.

Ingress Filtering - Specify how you want the port to handle tagged frames. If you enable Ingress Filtering on the pull down menu, a tagged frame will be discarded if this port is not a member of the VLAN identified by the VLAN ID in the tag. If you select disable from the pull down menu, all tagged frames will be accepted. The factory default is disabled.

Port Priority - Specify the default 802.1p priority assigned to untagged packets arriving at the port.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

The screenshot shows a web browser window with the title "VLAN Port Configuration". In the top right corner, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". The main content area has a light gray background and contains the following configuration fields:

- Slot/Port:** A dropdown menu with "All" selected.
- Port VLAN ID:** A text input field containing "1", with "(1 to 4021)" displayed to its right.
- Acceptable Frame Types:** A dropdown menu with "Admit All" selected.
- Ingress Filtering:** A dropdown menu with "Disable" selected.
- Port Priority:** A text input field containing "0", with "(0 to 7)" displayed to its right.

At the bottom center of the configuration area is a "Submit" button.

11.2.2.1.4. Viewing VLAN Port Summary Page

Non-Configurable Data

Slot/Port - The interface.

Port VLAN ID - The VLAN ID that this port will assign to untagged frames or priority tagged frames received on this port.

Acceptable Frame Types - Specifies the types of frames that may be received on this port. The options are 'VLAN only' and 'Admit All'. When set to 'VLAN only', untagged frames or priority tagged frames received on this port are discarded. When set to 'Admit All', untagged frames or priority tagged frames received on this port are accepted and assigned the value of the Port VLAN ID for this port. With either option, VLAN tagged frames are forwarded in accordance to the 802.1Q VLAN specification.

Ingress Filtering - When enabled, the frame is discarded if this port is not a member of the VLAN with which this frame is associated. In a tagged frame, the VLAN is identified by the VLAN ID in the tag. In an untagged frame, the VLAN is the Port VLAN ID specified for the port that received this frame. When disabled, all frames are forwarded in accordance with the 802.1Q VLAN bridge specification. The factory default is disabled.

Port Priority - Specifies the default 802.1p priority assigned to untagged packets arriving at the port.


VLAN Port Summary					Print	Reload	Help
Listing of all Ports on the Switch							
Slot/Port	Port VLAN ID	Acceptable Frame Types	Ingress Filtering	Port Priority			
0/1	1	Admit All	Disabled	0			
0/2	1	Admit All	Disabled	0			
0/3	1	Admit All	Disabled	0			
0/4	1	Admit All	Disabled	0			
0/5	1	Admit All	Disabled	0			
0/6	1	Admit All	Disabled	0			
0/7	1	Admit All	Disabled	0			
0/8	1	Admit All	Disabled	0			
0/9	1	Admit All	Disabled	0			
0/10	1	Admit All	Disabled	0			
0/11	1	Admit All	Disabled	0			
0/12	1	Admit All	Disabled	0			
0/13	1	Admit All	Disabled	0			
0/14	1	Admit All	Disabled	0			
0/15	1	Admit All	Disabled	0			
0/16	1	Admit All	Disabled	0			
0/17	1	Admit All	Disabled	0			
0/18	1	Admit All	Disabled	0			
0/19	1	Admit All	Disabled	0			
0/20	1	Admit All	Disabled	0			
0/21	1	Admit All	Disabled	0			
0/22	1	Admit All	Disabled	0			
0/23	1	Admit All	Disabled	0			
0/24	1	Admit All	Disabled	0			
1/1	1	Admit All	Disabled	0			
1/2	1	Admit All	Disabled	0			
1/3	1	Admit All	Disabled	0			

11.2.2.1.5. Resetting VLAN Configuration Page

Command Buttons

Reset - If you select this button and confirm your selection on the next screen, all VLAN configuration parameters will be reset to their factory default values. Also, all VLANs, except for the default VLAN, will be deleted. The factory default values are:

- All ports are assigned to the default VLAN of 1.
- All ports are configured with a PVID of 1.
- All ports are configured to an Acceptable Frame Types value of Admit All Frames.
- All ports are configured with Ingress Filtering disabled.
- All ports are configured to transmit only untagged frames.
- GVRP is disabled on all ports and all dynamic entries are cleared.
- GVRP is disabled for the switch and all dynamic entries are cleared.
- GMRP is disabled on all ports and all dynamic entries are cleared.
- GMRP is disabled for the switch and all dynamic entries are cleared.

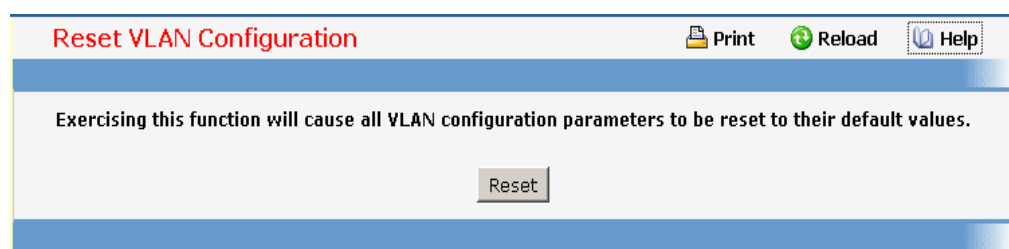

11.2.2.2 Managing Protocol-based VLAN

11.2.2.2.1 Protocol-based VLAN Configuration Page

You can use a protocol-based VLAN to define filtering criteria for untagged packets. By default, if you do not configure any port- (IEEE 802.1Q) or protocol-based VLANs, untagged packets will be assigned to VLAN 1. You can override this behavior by defining either port-based VLANs or protocol-based VLANs, or both. Tagged packets are always handled according to the IEEE 802.1Q standard, and are not included in protocol-based VLANs.

If you assign a port to a protocol-based VLAN for a specific protocol, untagged frames received on that port for that protocol will be assigned the protocol-based VLAN ID. Untagged frames received on the port for other protocols will be assigned the Port VLAN ID - either the default PVID (1) or a PVID you have specifically assigned to the port using the Port VLAN Configuration screen.

You define a protocol-based VLAN by creating a group. Each group has a one-to-one relationship with a VLAN ID, can include one to three protocol definitions, and can include multiple ports. When you create a group you will choose a name and a Group ID will be assigned automatically.

Selection Criteria

Group ID - You can use this screen to reconfigure or delete an existing protocol-based VLAN, or create a new one. Use this pull down menu to select one of the existing PBVLANs, or select 'Create' to add a new one. A Group ID number will be assigned automatically when you create a new group. You can create up to 128 groups.

Configurable Data

Group Name - Use this field to assign a name to a new group. You may enter up to 16 characters.

Protocol(s) - Select the protocols you want to be associated with the group. There are three configurable protocols: IP, IPX, and ARP. Hold down the control key to select more than one protocol.

IP - IP is a network layer protocol that provides a connectionless service for the delivery of data.

ARP - Address Resolution Protocol (ARP) is a low-level protocol that dynamically maps network layer addresses to physical medium access control (MAC) addresses

IPX - The Internetwork Packet Exchange (IPX) is a connectionless datagram Network-layer protocol that forwards data over a network.

VLAN - VLAN can be any number in the range of (1 to 3965) . All the ports in the group will assign this VLAN ID to untagged packets received for the protocols you included in this group.

Slot/Port(s) - Select the interface(s) you want to be included in the group. Note that a given interface can only belong to one group for a given protocol. If you have already added interface 0.1 to a group for IP, you cannot add it to another group that also includes IP, although you could add it to a new group for IPX.

Non-Configurable Data

Group ID - A number used to identify the group created by the user. Group IDs are automatically assigned when a group is created by the user.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

Delete - Remove the Protocol Based VLAN group identified by the value in the Group ID field. If you want the switch to retain the deletion across a power cycle, you must perform a save.

The screenshot shows a web interface titled "Protocol-based VLAN Configuration". At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". The main configuration area contains the following fields:

- Group**: A dropdown menu showing "1 - 1234".
- Group Name**: A text field containing "1234".
- Group ID**: A text field containing "1".
- Protocols**: A list box with three options: "IP" (selected), "ARP", and "IPX".
- VLAN**: A text field containing "0" with a range "(1 to 4021)" to its right.
- Slot/Port**: A list box with eight options: "0/1", "0/2", "0/3", "0/4", "0/5", "0/6", "0/7", and "0/8".

At the bottom of the form, there are two buttons: "Submit" and "Delete Group".

11.2.2.2.2. Viewing Protocol-based VLAN Information Page

Non-Configurable Data

Group Name - The name associated with the group. Group names can be up to 16 characters. The maximum number of groups allowed is 128.

Group ID - The number used to identify the group. It was automatically assigned when you created the group.

Protocol(s) - The protocol(s) that belongs to the group. There are three configurable protocols: IP, IPX, and ARP.

IP - IP is a network layer protocol that provides a connectionless service for the delivery of data.

ARP - Address Resolution Protocol (ARP) is a low-level protocol that dynamically

maps network layer addresses to physical medium access control (MAC) addresses.

IPX - The Internetwork Packet Exchange (IPX) is a connectionless datagram Network-layer protocol that forwards data over a network.

VLAN - The VLAN ID associated with the group.

Slot/Port(s) - The interfaces associated with the group.

Command Buttons

Refresh - Update the screen with the latest information.

Protocol-based VLAN Summary					Print	Reload	Help
Group Name	Group ID	Protocols	VLAN	Unit/Slot/Port			
aa	1	IP	1	1/0/4			
Refresh							

11.2.2.3 Defining GARP

11.2.2.3.1 Viewing GARP Information Page

This screen shows the GARP Status for the switch and for the individual ports. Note that the timers are only relevant when the status for a port shows as enabled.

Non-Configurable Data

Switch GVRP - Indicates whether the GARP VLAN Registration Protocol administrative mode for this switch is enabled or disabled. The factory default is disabled.

Switch GMRP - Indicates whether the GARP Multicast Registration Protocol administrative mode for this switch, enabled or disabled. The factory default is disabled.

Slot/Port - Slot/Port of the interface.

Port GVRP Mode - Indicates whether the GVRP administrative mode for the port is enabled or disabled. The factory default is disabled.

Port GMRP Mode - Indicates whether the GMRP administrative mode for the port is enabled or disabled. The factory default is disabled.

Join Time (centiseconds) - Specifies the time between the transmission of GARP PDUs registering (or re-registering) membership for a VLAN or multicast group in centiseconds. An instance of this timer exists for each GARP participant for each port. Permissible values are 10 to 100 centiseconds (0.1 to 1.0 seconds). The factory default is 20 centiseconds (0.2 seconds).

Leave Time (centiseconds) - Specifies the time to wait after receiving an unregister request for a VLAN or multicast group before deleting the associated entry, in centiseconds. This allows time for another station to assert registration for the same attribute in order to maintain uninterrupted service. An instance of this timer exists for each GARP participant for each port. Permissible values are 20 to 600 centiseconds (0.2 to 6.0 seconds). The factory default is 60 centiseconds (0.6 seconds).

Leave All Time (centiseconds) -This Leave All Time controls how frequently LeaveAll PDUs are generated. A LeaveAll PDU indicates that all registrations will shortly be deregistered. Participants will need to rejoin in order to maintain registration. An instance of this timer exists for each GARP participant for each port. The Leave All Period Timer is set to a random value in the range of LeaveAllTime to 1.5*LeaveAllTime. Permissible values are 200 to 6000 centiseconds (2 to 60 seconds). The factory default is 1000 centiseconds (10 seconds).

GARP Status						Print	Reload	Help
Switch GVRP			Disabled					
Switch GMRP			Disabled					
Slot/Port	Port GVRP Mode	Port GMRP Mode	Join Timer (centiseecs)	Leave Timer (centiseecs)	Leave All Timer (centiseecs)			
0/1	Disabled	Disabled	20	60	1000			
0/2	Disabled	Disabled	20	60	1000			
0/3	Disabled	Disabled	20	60	1000			
0/4	Disabled	Disabled	20	60	1000			
0/5	Disabled	Disabled	20	60	1000			
0/6	Disabled	Disabled	20	60	1000			
0/7	Disabled	Disabled	20	60	1000			
0/8	Disabled	Disabled	20	60	1000			
0/9	Disabled	Disabled	20	60	1000			
0/10	Disabled	Disabled	20	60	1000			
0/11	Disabled	Disabled	20	60	1000			
0/12	Disabled	Disabled	20	60	1000			
0/13	Disabled	Disabled	20	60	1000			
0/14	Disabled	Disabled	20	60	1000			
0/15	Disabled	Disabled	20	60	1000			
0/16	Disabled	Disabled	20	60	1000			
0/17	Disabled	Disabled	20	60	1000			
0/18	Disabled	Disabled	20	60	1000			
0/19	Disabled	Disabled	20	60	1000			
0/20	Disabled	Disabled	20	60	1000			
0/21	Disabled	Disabled	20	60	1000			
0/22	Disabled	Disabled	20	60	1000			
0/23	Disabled	Disabled	20	60	1000			
0/24	Disabled	Disabled	20	60	1000			
1/1	Disabled	Disabled	20	60	1000			
1/2	Disabled	Disabled	20	60	1000			
1/3	Disabled	Disabled	20	60	1000			

11.2.2.3.2. Configuring the whole Switch GARP Configuration Page

Note: It can take up to 10 seconds for GARP configuration changes to take effect.

Configurable Data


GVRP Mode - Choose the GARP VLAN Registration Protocol administrative mode for the switch by selecting enable or disable from the pull down menu. The factory default is disabled.

GMRP Mode - Choose the GARP Multicast Registration Protocol administrative mode for

the switch by selecting enable or disable from the pull down menu. The factory default is disabled.

Command Buttons

Submit - Update the switch with the values you entered. If you want the switch to retain the new values across a power cycle you must perform a save.

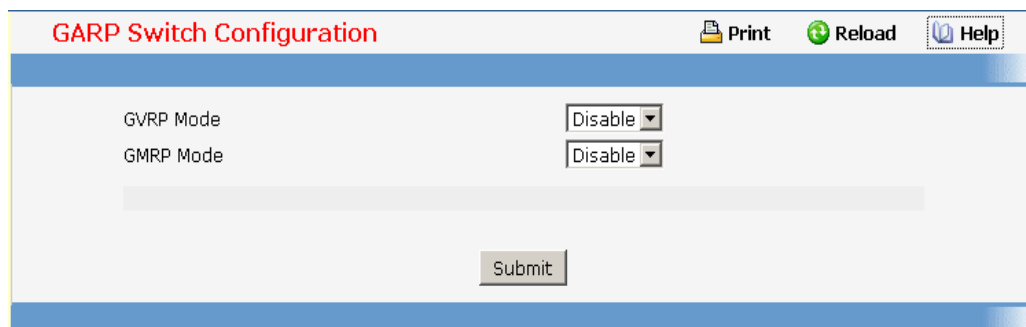

11.2.2.3.3. Configuring each Port GARP Configuration Page

Note: It can take up to 10 seconds for GARP configuration changes to take effect.

Selection Criteria

Slot/Port - Select the physical interface for which data is to be displayed or configured. It is possible to set the parameters for all ports by selecting 'All'.

Configurable Data

Port GVRP Mode - Choose the GARP VLAN Registration Protocol administrative mode for the port by selecting enable or disable from the pull down menu. If you select disable, the protocol will not be active and the Join Time, Leave Time, and Leave All Time will have no effect. The factory default is disabled.

Port GMRP Mode - Choose the GARP Multicast Registration Protocol administrative mode for the port by selecting enable or disable from the pull down menu. If you select disable, the protocol will not be active, and Join Time, Leave Time, and Leave All Time have no effect. The factory default is disabled.

Join Time (centiseconds) - Specify the time between the transmission of GARP PDUs registering (or re-registering) membership for a VLAN or multicast group in centiseconds. Enter a number between 10 and 100 (0.1 to 1.0 seconds). The factory default is 20 centiseconds (0.2 seconds). An instance of this timer exists for each GARP participant for each port.

Leave Time (centiseconds) - Specify the time to wait after receiving an unregister request for a VLAN or multicast group before deleting the associated entry, in centiseconds. This allows time for another station to assert registration for the same attribute in order to maintain uninterrupted service. Enter a number between 20 and 600 (0.2 to 6.0 seconds). The factory default is 60 centiseconds (0.6 seconds). An instance of this timer exists for each GARP participant for each port.

Leave All Time (centiseconds) - The Leave All Time controls how frequently LeaveAll PDUs are generated. A LeaveAll PDU indicates that all registrations will shortly be deregistered. Participants will need to rejoin in order to maintain registration. The Leave All Period Timer is set to a random value in the range of LeaveAllTime to 1.5*LeaveAllTime. The timer is specified in centiseconds. Enter a number between 200 and 6000 (2 to 60

seconds). The factory default is 1000 centiseconds (10 seconds). An instance of this timer exists for each GARP participant for each port.

Command Buttons

Submit - Update the switch with the values you entered. If you want the switch to retain the new values across a power cycle you must perform a save.

The screenshot shows a web browser window titled "GARP Port Configuration". At the top right, there are three buttons: "Print", "Reload", and "Help". The main content area has a light blue header. Below it, there are three rows of configuration options: "Slot/Port" with a dropdown menu set to "All", "Port GVRP Mode" with a dropdown menu set to "Disable", and "Port GMRP Mode" with a dropdown menu set to "Disable". Below these is a section titled "GARP Timers". It contains three rows of timer settings: "Join Timer (centisecs)" with a text input field containing "20" and a range "(10 to 100)", "Leave Timer (centisecs)" with a text input field containing "60" and a range "(20 to 600)", and "Leave All Timer (centisecs)" with a text input field containing "1000" and a range "(200 to 6000)". At the bottom center of the form is a "Submit" button.

11.2.2.4 Managing IGMP Snooping

11.2.2.4.1. Configuring IGMP Snooping Global Configuration Page

Use this menu to configure the parameters for IGMP Snooping, which is used to build forwarding lists for multicast traffic. Note that only a user with Read/Write access privileges may change the data on this screen.

Configurable Data

Admin Mode - Select the administrative mode for IGMP Snooping for the switch from the pulldown menu. The default is disable.

Non-Configurable Data

Multicast Control Frame Count - The number of multicast control frames that are processed by the CPU.

Interfaces Enabled for IGMP Snooping - A list of all the interfaces currently enabled for IGMP Snooping.

Data Frames Forwarded by the CPU - The number of data frames forwarded by the CPU.

VLAN Ids Enabled For IGMP Snooping - Displays VLAN Ids enabled for IGMP snooping.

Command Buttons

Submit - Update the switch with the values you entered. If you want the switch to retain the new values across a power cycle you must perform a save. You will only see this button if you have Read/Write access privileges.

IGMP Snooping Global Configuration and Status

Print Reload Help

Admin Mode: Enable

Multicast Control Frame Count: 0

Interfaces Enabled for IGMP Snooping: [1/0/1]

Data Frames Forwarded by the CPU: 0

VLAN Ids Enabled for IGMP Snooping

Submit

11.2.2.4.2. Defining IGMP Snooping Interface Configuration Page

Configurable Data

Unit/Slot/Port - The single select box lists all physical ,VLAN and LAG interfaces. Select the interface you want to configure.

Admin Mode - Select the interface mode for the selected interface for IGMP Snooping for the switch from the pulldown menu. The default is disable.

Group Membership Interval - Specify the amount of time you want the switch to wait for a report for a particular group on a particular interface before it deletes that interface from the group. Enter a value between 1 and 3600 seconds. The default is 260 seconds.

Max Response Time - Specify the amount of time you want the switch to wait after sending a query on an interface because it did not receive a report for a particular group on that interface. Enter a value greater or equal to 1 and less than the Group Membership Interval in seconds. The default is 10 seconds. The configured value must be less than the Group Membership Interval.

Multicast Router Present Expiration Time - Specify the amount of time you want the switch to wait to receive a query on an interface before removing it from the list of interfaces with multicast routers attached. Enter a value between 0 and 3600 seconds. The default is 0 seconds. A value of zero indicates an infinite timeout, i.e. no expiration.

Fast Leave Admin mode - Select the Fast Leave mode for the a particular interface from the pulldown menu. The default is disable.

Command Buttons

Submit - Update the switch with the values you entered. If you want the switch to retain the new values across a power cycle you must perform a save. You will only see this button if you have Read/Write access privileges.

IGMP Snooping Interface Configuration		Print	Reload	Help
Unit/Slot/Port	1/0/1			
Admin Mode	Enable			
Group Membership Interval(secs)	260 (2 to 3600)			
Max Response Time(secs)(Less Than Group Membership Interval)	10 (1 to Group Membership Interval - 1 (secs))			
Multicast Router Present Expiration Time(secs)	0 (0 to 3600)			
Fast Leave Admin Mode	Disable			
Submit				

11.2.2.4.3. Viewing IGMP Snooping VLAN Status Page

Non-Configurable Data

VLAN ID - All Vlan Ids for which the IGMP Snooping mode is Enabled.

Admin Mode - Igmp Snooping Mode for Vlan ID.

Fast Leave Admin Mode - Fast Leave Mode for Vlan ID.

Group Membership Interval - Group Membership Interval of IGMP Snooping for the specified VLAN ID. Valid range is 2 to 3600.

Maximum Response Time - Maximum Response Time of IGMP Snooping for the specified VLAN ID. Valid range is 1 to 3599. Its value should be greater than group membership interval value.

Multicast Router Expiry Time - Multicast Router Expiry Time of IGMP Snooping for the specified VLAN ID. Valid range is 0 to 3600.

IGMP Snooping VLAN Status						Print	Reload	Help
VLAN ID	Admin Mode	Fast Leave Admin Mode	Group Membership Interval	Max Response Time	Multicast Router Expiry Time			
2	Enable	Disable	260	10	0			

11.2.2.4.4. Configuring IGMP Snooping VLAN Page

Configurable Data

VLAN ID - Specifies list of VLAN IDs for which IGMP Snooping is enabled.

VLAN ID - Appears when "New Entry" is selected in VLAN ID combo box. Specifies VLAN ID for which pre-configurable Snooping parameters are to be set.

Admin Mode - Enable or disable the Igmp Snooping for the specified VLAN ID.

Fast Leave Admin Mode - Enable or disable the Igmp Snooping Fast Leave Mode for the specified VLAN ID.

Group Membership Interval - Sets the value for group membership interval of IGMP Snooping for the specified VLAN ID. Valid range is (Maximum Response Time + 1) to 3600.

Maximum Response Time - Sets the value for maximum response time of IGMP Snooping for the specified VLAN ID. Valid range is 1 to (Group Membership Interval - 1). Its value should be greater than group membership interval value.

Multicast Router Expiry Time - Sets the value for multicast router expiry time of IGMP Snooping for the specified VLAN ID. Valid range is 0 to 3600.

Command Buttons

Submit - Update the switch with the values you entered.

IGMP Snooping VLAN Configuration

Print Reload Help

VLAN ID 2

Admin Mode Enable

Fast Leave Admin Mode Disable

Group Membership Interval 260 (Max Response Time + 1 to 3600)

Maximum Response Time 10 (1 to Group Membership Interval - 1)

Multicast Router Expiry Time 0 (0 to 3600)

Submit

11.2.2.4.5. Viewing Multicast Router Statistics Page


Non-Configurable Data

Unit/Slot/Port - The single select box lists all physical and LAG interfaces. Select the interface for which you want to display the statistics.

Multicast Router - Specifies for the selected interface whether multicast router is enable or disabled.

Command Buttons

Refresh - Refetch the database and display it again starting with the first entry in the table.

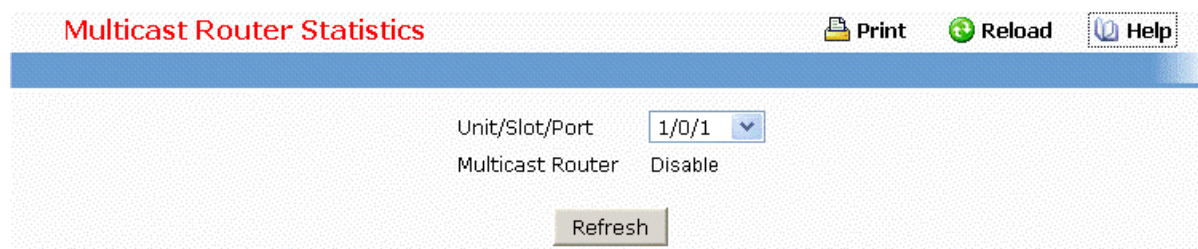

Multicast Router Statistics

Unit/Slot/Port: 1/0/1

Multicast Router: Disable

Refresh

11.2.2.4.6. Configuring Multicast Router Page


Configurable Data

Unit/Slot/Port - The select box lists all Unit/Slot/Ports. Select the interface for which you want Multicast Router to be enabled .

Multicast Router - Enable or disable Multicast Router on the selected Unit/Slot/Port.

Command Buttons

Submit - Update the switch with the values you entered.

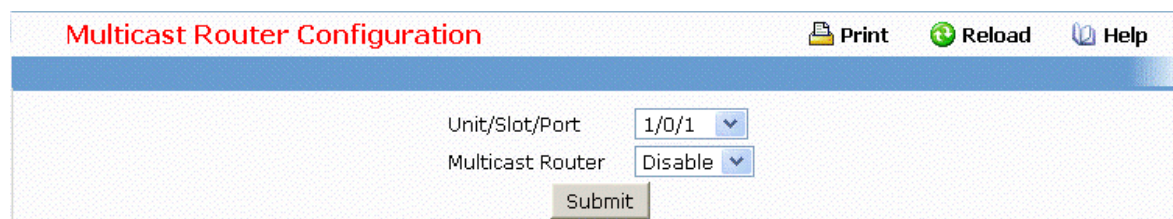

Multicast Router Configuration

Unit/Slot/Port: 1/0/1

Multicast Router: Disable

Submit

11.2.2.4.7. Viewing Multicast Router VLAN Statistics Page


Selection Criteria

Unit/Slot/Port - The select box lists all Unit/Slot/Ports. Select the interface for which you want to display the statistics.

Non-Configurable Data

VLAN ID - All Vlan Ids for which the Multicast Router Mode is Enabled

Multicast Router - Multicast Router Mode for Vlan ID.



11.2.2.4.8. Configuring Multicast Router VLAN Page

Selection Criteria

Unit/Slot/Port - The select box lists all Unit/Slot/Ports. Select the interface for which you want Multicast Router to be enabled.


Configurable Data

VLAN ID - VLAN ID for which the Multicast Router Mode is to be Enabled or Disabled.

Multicast Router - For the Vlan ID, multicast router may be enabled or disabled using this.

Command Buttons

Submit - Update the switch with the values you entered.

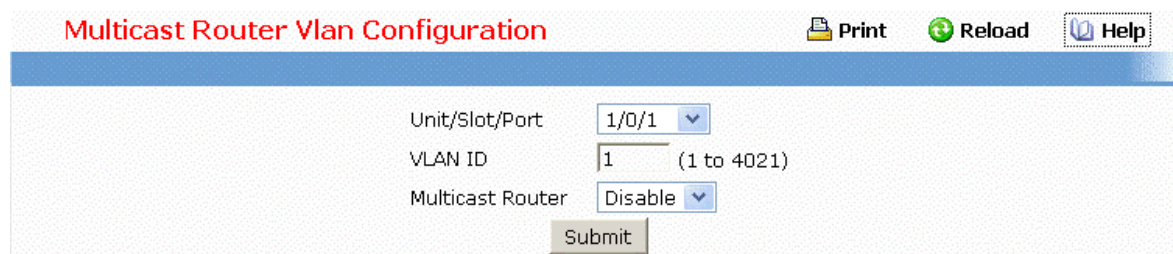

11.2.2.4.9. Configuring L2 Static Multicast Group Configuration Page

Non-Configurable Data

MAC Address Table - This is the list of MAC address and VLAN ID pairings for all configured L2Mcast Groups. To change the port mask(s) for an existing L2Mcast Group, select the entry you want to change. To add a new L2Mcast Group, select "Create Filter" from the top of the list.

Configurable Data

MAC Filter - The MAC address of the L2Mcast Group in the format 01:00:5E:xx:xx:xx. You can only change this field when you have selected the "**Create Filter**" option. You cannot define L2Mcast Group for these MAC addresses:

00:00:00:00:00:00

01:00:5E:00:00:01 to 01:00:5E:00:00:FF

FF:FF:FF:FF:FF:FF

VLAN ID - The VLAN ID used with the MAC address to fully identify packets you want L2Mcast Group. You can only change this field when you have selected the "Create Filter" option.

Solt/Port(s) - List the ports you want included into L2Mcast Group.

Command Buttons

Submit - Update the switch with the values on the screen. If you want the switch to retain the new values across a power cycle you must perform a save.

Delete - Remove the currently selected L2Mcast Group.

Delete All - Remove all configured L2Mcast Groups.

11.2.2.4.10. Viewing L2 Multicast Group Information Page

Use this panel to display information about entries in the L2Mcast Static/Dynamic Groups. These entries are used by the transparent bridging function to determine how to forward a received frame.

Selection Criteria

Static - Displays static unit for L2Mcast Groups.

Dynamic - Displays dynamic unit for L2Mcast Groups.

All - Displays all of L2Mcast Groups.

Configurable Data

Filter - Specify the entries you want displayed.

Static: If you choose "Static" only L2Mcast addresses that have been configured will be displayed.

Dynamic: If you choose "Dynamic" only L2Mcast addresses that have been learned will be displayed.

All: If you choose "all" the whole table will be displayed.

MAC Address Search - You may also search for an individual L2Mcast address. Enter the six byte hexadecimal MAC address, for example 01:00:5E:00:11:11.

VLAN - You also have to give a VLAN ID you want with L2Mcast address.

Then click on the search button. If the address exists, that entry will be displayed as the first entry followed by the remaining (greater) MAC addresses. An exact match is required.

Non-Configurable Data

VLAN - L2Mcast Group's VLAN ID value.

MAC Address - A multicast MAC address for which the switch has forwarding information. The format is a six-byte MAC address. For example: 01:00:5E:00:11:11.

Unit/Slot/Ports - the interface number belongs to this Multicast Group.

Type - The status of this entry. The possible values are:

Static: the entry was configured by setting a static L2Mcast.

Dynamic: the entry was configured by setting a dynamic L2Mcast.

All: the entry was configured by setting the whole L2Mcast table.

Command Buttons

Search - Search for the specified L2Mcast address.

Refresh - Refresh the database and display it again starting with the first entry in the table.

Management Unit 1

Filter All VLAN All

MAC Address Search Search

VLAN	MAC Address	Type	Unit/Slot/Port(s)
1	01:00:5E:22:33:44	Static	1/0/7

Refresh

11.2.2.4.11. Viewing L2 Multicast Router Port Information Page

Use this panel to display information about entries in the L2Mcast Static/Dynamic router ports. These entries are used by the transparent bridging function to determine how to forward a received frame.

Selection Criteria

Static - Displays static unit for L2Mcast router port(s).

Dynamic - Displays dynamic unit for L2Mcast router port(s).

All - Displays all of L2Mcast router port(s).

Configurable Data

Filter - Specify the entries you want displayed.

Static: If you choose "Dynamic" only L2Mcast router port(s) that have been learned

will be displayed.

Dynamic: If you choose "Static" only L2Mcast router port(s) that have been configured will be displayed.

All: If you choose "all" the whole table will be displayed.

VLAN - You also have to give a VLAN ID you want with L2Mcast router port.

If the entry exists, it will be displayed as the first entry followed by VLAN ID. An exact match is required.

Non-Configurable Data

VLAN - L2Mcast Router Port's VLAN ID value.

Slot/Ports - the interface number belongs to this Multicast router.

Type - The status of this entry. The possible values are:

Static: the entry was configured by setting a static L2Mcast router.

Dynamic: the entry was configured by setting a dynamic L2Mcast router.

All: the entry was configured by setting the whole L2Mcast router table.

Command Buttons

Refresh - Refresh the database and display it again starting with the first entry in the table.

Management Unit 1

All VLAN All

VLAN	Type	Unit/Slot/Port(s)
1	Static	1/0/13

Refresh

11.2.2.5 Managing Port-Channel

11.2.2.5.1. Defining Port-Channel Static Capability Mode Page


Configurable Data

Static Capability Mode - May be enabled or disabled by selecting the corresponding line on the pull down entry field. The factory default is disabled. This field is non-configurable for read-only users.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

Refresh - Refresh the data on the screen with the present state of the data in the switch.

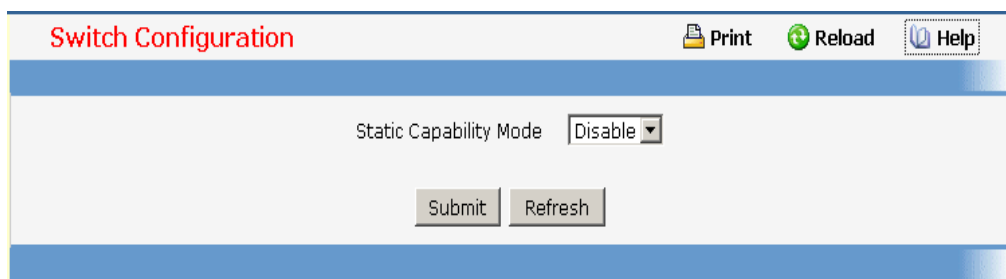

11.2.2.5.2. Configuring Port-Channel Configuration Page

Selection Criteria

Port Channel Name – You can use this screen to reconfigure an existing Port Channel, or to create a new one. Use this pull down menu to select one of the existing Port Channels, or select 'Create' to add a new one. There can be a maximum of 6 Port Channels.

Configurable Data

Port Channel Name - Enter the name you want assigned to the Port Channel. You may enter any string of up to 15 alphanumeric characters. A valid name has to be specified in order to create the Port Channel.

Link Trap - Specify whether you want to have a trap sent when link status changes. The factory default is enable, which will cause the trap to be sent.

Administrative Mode - Select enable or disable from the pull down menu. When the Port Channel is disabled no traffic will flow and LACPDUs will be dropped, but the links that form the Port Channel will not be released. The factory default is enabled.

STP Mode - The Spanning Tree Protocol Administrative Mode associated with the Port Channel. The possible values are:

Disable - spanning tree is disabled for this Port Channel.

Enable - spanning tree is enabled for this Port Channel.

Participation - For each port specify whether it is to be included as a member of this Port Channel or not. The default is excluded. There can be a maximum of 8 ports assigned to a Port Channel.

Non-Configurable Data

Slot/Port - Slot/Port identification of the Port Channel being configured. This field will not appear when a new Port Channel is being created.

Link Status - Indicates whether the Link is up or down.

Port Channel Members - List of members of the Port Channel in Slot/Port form.

Membership Conflicts - Shows ports that are already members of other Port Channels. A port may only be a member of one Port Channel at a time. If the entry is blank, it is not currently a member of any Port Channel.

Command Buttons




Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

Delete - Removes the currently selected configured Port Channel. All ports that were members of this Port Channel are removed from the Port Channel and included in the

default VLAN. This field will not appear when a new Port Channel is being created.

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Port Channel Configuration

 Print
  Reload
  Help

Port Channel Name 1/1 - LAG-1

Submit
Delete
Refresh

Slot/Port	Port Channel Name	Link Trap	Administrative Mode	Link Status	STP Mode
1/1	LAG-1	Enable	Enable	Link Up	Enable

Port Channel Members

0/18 0/22 0/24

Slot/Port	Participation	Membership Conflicts
0/1	Exclude	
0/2	Exclude	
0/3	Exclude	
0/4	Exclude	
0/5	Exclude	
0/6	Exclude	Member of 1/3
0/7	Exclude	
0/8	Exclude	Member of 1/3
0/9	Exclude	
0/10	Exclude	
0/11	Exclude	
0/12	Exclude	
0/13	Exclude	
0/14	Exclude	Member of 1/2
0/15	Exclude	
0/16	Exclude	Member of 1/2
0/17	Exclude	
0/18	Include	
0/19	Exclude	
0/20	Exclude	
0/21	Exclude	
0/22	Include	
0/23	Exclude	
0/24	Include	

11.2.2.5.3. Viewing Port-Channel Information Page

Non-Configurable Data

Port Channel - The Slot/Port identification of the Port Channel.

Port Channel Name - The name of the Port Channel.

Port Channel Type - The type of this Port Channel.

Admin Mode - The Administrative Mode of the Port Channel, enable or disable.

Link Status - Indicates whether the Link is up or down.

STP Mode - The Spanning Tree Protocol Administrative Mode associated with the Port Channel. The possible values are:

Disable - spanning tree is disabled for this Port Channel.

Enable - spanning tree is enabled for this Port Channel.

Link Trap - Whether or not a trap will be sent when link status changes. The factory default is enabled.

Configured Ports - A list of the ports that are members of the Port Channel, in Slot/Port notation. There can be a maximum of 8 ports assigned to a Port Channel.

Active Ports - A listing of the ports that are actively participating members of this Port Channel, in Slot/Port notation. There can be a maximum of 8 ports assigned to a Port Channel.

Port Channel Status								
			Print		Reload		Help	
Port Channel	Port Channel Name	Port Channel Type	Admin Mode	Link State	STP Mode	Link Trap	Configured Ports	Active Ports
1/1	LAG-1	Dynamic	Enable	Link Up	Enable	Enable	0/18 0/22 0/24	0/24 0/22
1/2	LAG-2	Dynamic	Enable	Link Down	Disable	Enable	0/14 0/16	
1/3	LAG-3	Static	Enable	Link Up	Enable	Enable	0/6 0/8	0/6 0/8

11.2.2.6 Viewing Multicast Forwarding Database

11.2.2.6.1. Viewing All of Multicast Forwarding Database Tables Page

The Multicast Forwarding Database holds the port membership information for all active multicast address entries. The key for an entry consists of a VLAN ID and MAC address pair. Entries may contain data for more than one protocol.

Use this screen to display the MFDB information for a specific entry. To display all of the entries for a particular protocol use one of the following menus:

MAC Filter Summary - Static MAC address filtering entries

MFDB GMRP Table - GARP Multicast Registration Protocol entries

MFDB IGMP Snooping Table - IGMP Snooping entries

Selection Criteria

MAC Address - Enter the VLAN ID - MAC Address pair whose MFDB table entry you want displayed. Enter eight two-digit hexadecimal numbers separated by colons, for example 00:01:23:43:45:67:89:AB. The first two two-digit hexadecimal numbers are the VLAN ID and the remaining numbers are the MAC address. Then click on the "Search" button. If the address exists, that entry will be displayed. An exact match is required.

Non-Configurable Data

MAC Address - The multicast MAC address for which you requested data.

Type - This displays the type of the entry. Static entries are those that are configured by the end user. Dynamic entries are added to the table as a result of a learning process or

protocol.

Component - This is the component that is responsible for this entry in the Multicast Forwarding Database. Possible values are IGMP Snooping, GMRP, and Static Filtering.

Description - The text description of this multicast table entry. Possible values are Management Configured, Network Configured, and Network Assisted.

Unit/Slot/Port(s) - The list of interfaces that are designated for forwarding (Fwd:) and filtering (Flt:) for the selected address.

Forwarding Slot/Port(s) - The resultant forwarding list is derived from combining all the forwarding interfaces and removing the interfaces that are listed as the static filtering interfaces.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Multicast Forwarding Database Table

Print

Reload

Help

MAC Address

Search

MAC Address	Component	Type	Description	Unit/Slot/Port	Forwarding Unit/Slot/Port(s)
00:01:01:00:5E:22:33:44	IGMP Snooping	Dynamic	Network Assist	Fwd: 1/0/7 1/0/13	Fwd: 1/0/7 1/0/13

Refresh

11.2.2.6.2. Viewing GMRP MFDB Table Page

This screen will display all of the entries in the Multicast Forwarding Database that were created for the GARP Multicast Registration Protocol.

Non-Configurable Data

MAC Address - A VLAN ID - multicast MAC address pair for which the switch has forwarding and/or filtering information. The format is 8 two-digit hexadecimal numbers that are separated by colons, for example 00:01:23:45:67:89:AB:CD.

Type - This displays the type of the entry. Static entries are those that are configured by the user. Dynamic entries are added to the table as a result of a learning process or protocol.

Description - The text description of this multicast table entry. Possible values are Management Configured, Network Configured, and Network Assisted.

Unit/Slot/Port(s) - The list of interfaces that are designated for forwarding (Fwd:) and filtering (Flt:).

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

MFDB GMRP Table			
Print Reload Help			
MAC Address	Type	Description	Unit/Slot/Port
<div> <input type="button" value="Refresh"/> </div>			

11.2.2.6.3. Viewing IGMP Snooping MFDB Table Page

Non-Configurable Data

MAC Address - A VLAN ID - multicast MAC address pair for which the switch has forwarding and/or filtering information. The format is 8 two-digit hexadecimal numbers that are separated by colons, for example 00:01:23:45:67:89:AB:CD.

Type - This displays the type of the entry. Static entries are those that are configured by the user. Dynamic entries are added to the table as a result of a learning process or protocol.

Description - The text description of this multicast table entry. Possible values are Management Configured, Network Configured, and Network Assisted.

Unit/Slot/Port(s) - The list of interfaces that are designated for forwarding (Fwd:) and filtering (Flt:).

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Clear Entries - Clicking this button tells the IGMP Snooping component to delete all of its entries from the multicast forwarding database.

MFDB IGMP Snooping Table				Print	Reload	Help
MAC Address	Type	Description	Unit/Slot/Port			
00:01:01:00:5E:22:33:44	Dynamic	Network Assist	Fwd: 1/0/7, 1/0/13			
				Refresh	Clear Entries	

11.2.2.6.4. Viewing Multicast Forwarding Database Statistics Page

Non-Configurable Data

Max MFDB Entries - The maximum number of entries that the Multicast Forwarding Database table can hold.

Most MFDB Entries Since Last Reset - The largest number of entries that have been present in the Multicast Forwarding Database table since last reset. This value is also known as the MFDB high-water mark.

Current Entries - The current number of entries in the Multicast Forwarding Database table.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Multicast Forwarding Database Statistics		Print	Reload	Help
Max MFDB Table Entries	256			
Most MFDB Entries Since Last Reset	10			
Current Entries	7			
Refresh				

11.2.2.7 Managing Spanning Tree

11.2.2.7.1. Configuring Switch Spanning Tree Configuration Page

Configurable Data

Spanning Tree Mode - Specifies whether spanning tree operation is enabled on the switch. Value is enabled or disabled

Force Protocol Version - Specifies the Force Protocol Version parameter for the switch. The options are IEEE 802.1d, IEEE 802.1w, and IEEE 802.1s. The default value is IEEE 802.1w.

Configuration Name- Identifier used to identify the configuration currently being used. It may be up to 32 alphanumeric characters

Configuration Revision Level - Identifier used to identify the configuration currently being used. The values allowed are between 0 and 65535. The default value is 0.

Non-Configurable Data

Configuration digest key - Identifier used to identify the configuration currently being used.

MST Table - Table consisting of the MST instances (including the CST) and the corresponding VLAN IDs associated with each of them.

VID Table - Table consisting of the VLAN IDs and the corresponding FID associated with each of them.

FID Table - Table consisting of the FIDs and the corresponding VLAN IDs associated with each of them.

Command Buttons

Submit - Applies the new configuration and causes the changes to take effect. These changes will not be retained across a power cycle unless a save configuration is performed.

Refresh - Refreshes the screen with most recent data.

Spanning Tree Switch Configuration/Status

Print Reload Help

Spanning Tree Admin Mode:

Force Protocol Version:

Configuration Name:

Configuration Revision Level: (0 to 65535)

Configuration Digest Key: 0xac36177f50283cd4b83821d8ab26de62

Submit Refresh

MST ID	VID	FID
CST	1 30 40 50	1 30 40 50

11.2.2.7.2. Configuring Spanning Tree CST Configuration Page

Configurable Data

Bridge Priority - Specifies the bridge priority for the Common and Internal Spanning tree (CST). The value lies between 0 and 61440. It is set in multiples of 4096. For example, if you set the priority to any value between 0 and 4095, it will be set to 0. If it is tried to be set to any value between 4096 and $(2 \times 4096 - 1)$ it will be set to 4096 and so on. The default priority is 32768.

Bridge Max Age - Specifies the bridge max age for the Common and Internal Spanning tree (CST). The value lies between 6 and 40, with the value being less than or equal to $2 \times (\text{Bridge Forward Delay} - 1)$ and greater than or equal to $2 \times (\text{Bridge Hello Time} + 1)$. The default value is 20.

Bridge Hello Time - Specifies the bridge hello time for the Common and Internal Spanning tree (CST), with the value being less than or equal to $(\text{Bridge Max Age} / 2) - 1$. The default hello time value is 2.

Bridge Forward Delay- Specifies the time spent in "Listening and Learning" mode before forwarding packets. Bridge Forward Delay must be greater or equal to $(\text{Bridge Max Age} / 2) + 1$. The time range is from 4 seconds to 30 seconds. The default value is 15.

Spanning Tree Maximum Hops- Configure the maximum number of hops for the Spanning tree.

Non-Configurable Data

Bridge identifier - The bridge identifier for the CST. It is made up using the bridge priority and the base MAC address of the bridge.

Time since topology change - The time in seconds since the topology of the CST last changed.

Topology change count - Number of times topology has changed for the CST.

Topology change - The value of the topology change parameter for the switch indicating if a topology change is in progress on any port assigned to the CST. It takes a value if True or False.

Designated root - The bridge identifier of the root bridge. It is made up from the bridge priority and the base MAC address of the bridge.

Root Path Cost - Path Cost to the Designated Root for the CST.

Root Port - Port to access the Designated Root for the CST.

Max Age - Path Cost to the Designated Root for the CST.

Forward Delay - Derived value of the Root Port Bridge Forward Delay parameter.

Hold Time - Minimum time between transmission of Configuration BPDUs.

CST Regional Root - Priority and base MAC address of the CST Regional Root.

CST Path Cost - Path Cost to the CST tree Regional Root.

Command Buttons

Submit - Applies the new configuration and causes the changes to take effect. These changes will not be retained across a power cycle unless a save configuration is performed.

Refresh - Refreshes the screen with most recent data.

Spanning Tree CST Configuration/Status
Print
Reload
Help

Bridge Priority	<input type="text" value="32768"/> (0 to 61440)
Bridge Max Age (secs)	<input type="text" value="20"/> (6 to 40)
Bridge Hello Time (secs)	<input type="text" value="2"/> (1 to 10)
Bridge Forward Delay (secs)	<input type="text" value="15"/> (4 to 30)
Spanning Tree Maximum Hops	<input type="text" value="20"/> (1 to 127)
Bridge Identifier	80:00:00:c0:9f:b1:d1:51
Time Since Topology Change	0 day 6 hr 23 min 22 se
Topology Change Count	0
Topology Change	False
Designated Root	80:00:00:c0:9f:b1:d1:51
Root Path Cost	0
Root Port	00:00
Max Age (secs)	20
Forward Delay (secs)	15
Hello Time	2
Hold Time (secs)	3
CST Regional Root	80:00:00:c0:9f:b1:d1:51
CST Path Cost	0

11.2.2.7.3. Configuring Spanning Tree MST Configuration Page

Selection Criteria

MST ID - Create a new MST which you wish to configure or configure already existing MSTs.

Configurable Data

MST ID - This is only visible when the select option of the MST ID select box is selected. The ID of the MST being created. Valid values for this are between 1 and 4054.

Priority - The bridge priority for the MST instance selected. The bridge priority is set in multiples of 4096. For example if you attempt to set the priority to any value between 0 and 4095, it will be set to 0. If you attempt to set any value between 4096 and $(2 \times 4096 - 1)$ it will be set to 4096 and so on.

VLAN ID - This gives a list box of all VLANs on the switch. The VLANs associated with the MST instance which is selected are highlighted on the list. These can be selected or unselected for re-configuring the association of VLANs to MST instances.

Non-Configurable Data

Bridge identifier - The bridge identifier for the selected MST instance. It is made up using the bridge priority and the base MAC address of the bridge.

Time since topology change - The time in seconds since the topology of the selected MST instance last changed.

Topology change count - Number of times the topology has changed for the selected MST instance.

Topology change - The value of the topology change parameter for the switch indicating if a topology change is in progress on any port assigned to the selected MST instance. It takes a value if True or False.

Designated root - The bridge identifier of the root bridge. It is made up from the bridge priority and the base MAC address of the bridge

Root Path Cost - Path Cost to the Designated Root for this MST instance.

Root port - Port to access the Designated Root for this MST instance.

Command Buttons

Submit - Applies the new configuration and causes the changes to take effect. These changes will not be retained across a power cycle unless a save configuration is performed.

Delete - Deletes the selected MST instance. All VLANs associated with the instance are associated with the CST

Refresh - Refreshes the screen with most recent data.

Spanning Tree MST Configuration/Status Print Reload Help

MST	4
Priority	32768 (0 to 61440)
VLAN ID	<div>1</div> <div>30</div> <div>40</div> <div>50</div>
Bridge Identifier	80:04:00:c0:9f:00:28:92
Time Since Topology Change	0 day 0 hr 0 min 32 sec
Topology Change Count	1
Topology Change	True
Designated Root	80:04:00:c0:9f:00:28:92
Root Path Cost	0
Root Port	00:00

Submit Delete Refresh

11.2.2.7.4. Configuring each Port CST Configuration Page

Selection Criteria

Slot/Port - Selects one of the physical or LAG interfaces associated with VLANs associated with the CST.

Configurable Data

Port Priority - The priority for a particular port within the CST. The port priority is set in multiples of 16. For example, if you attempt to set the priority to any value between 0 and 15, it will be set to 0. If you attempt to set any value between 16 and (2*16-1) it will be set to 16 and so on.

Admin Edge Port - Specifies if the specified port is an Edge Port within the CIST. It takes a value of Enable or Disable, where the default value is Disable.

Port Path Cost - Set the Path Cost to a new value for the specified port in the common and internal spanning tree. It takes a value in the range of 1 to 200000000.

Non-Configurable Data

Auto-calculate Port Path Cost - Displays whether the path cost is automatically calculated (Enabled) or not (Disabled). Path cost will be calculated based on the link speed of the port if the configured value for Port Path Cost is zero.

Port ID - The port identifier for the specified port within the CST. It is made up from the port priority and the interface number of the port.

Port Up Time Since Counters Last Cleared - Time since the counters were last cleared, displayed in Days, Hours, Minutes, and Seconds.

Port Mode - Spanning Tree Protocol Administrative Mode associated with the port or LAG. The possible values are Enable or Disable.

Port Forwarding State - The Forwarding State of this port.

Port Role - Each MST Bridge Port that is enabled is assigned a Port Role for each spanning tree. The port role will be one of the following values: Root Port, Designated Port,

Alternate Port, Backup Port, Master Port, or Disabled Port.

Designated Root - Root Bridge for the CST. It is made up using the bridge priority and the base MAC address of the bridge.

Designated Cost - Path Cost offered to the LAN by the Designated Port.

Designated Bridge - Bridge Identifier of the bridge with the Designated Port. It is made up using the bridge priority and the base MAC address of the bridge.

Designated Port - Port Identifier on the Designated Bridge that offers the lowest cost to the LAN. It is made up from the port priority and the interface number of the port.

Topology Change Acknowledge - Identifies whether the next BPDU to be transmitted for this port would have the topology change acknowledgement flag set. It is either "True" or "False".

Edge port - indicates whether the port is enabled as an edge port. It takes the value "Enabled" or "Disabled".

Point-to-point MAC - Derived value of the point-to-point status.

CST Regional Root - Bridge Identifier of the CST Regional Root. It is made up using the bridge priority and the base MAC address of the bridge.

CST Path Cost - Path Cost to the CST Regional Root.

Command Buttons

Submit - Applies the new configuration and causes the changes to take effect. These changes will not be retained across a power cycle unless a save configuration is performed.

Refresh - Refreshes the screen with most recent data.

Force - Clicking this button will force the port to send out 802.1w or 802.1s BPDUs.

Spanning Tree CST Port Configuration/Status
Print
Reload
Help

Unit/Slot/Port	1/0/1
Port Priority	128 (0 to 240)
Admin Edge Port	Disable
Port Path Cost	0 (0 to 200000000) 0 = Auto
Auto-calculate Port Path Cost	Enabled
External Port Path Cost	0 (0 to 200000000) 0 = Auto
Auto-calculate External Prt Path Cost	Enabled
Port ID	80:01
Port Up Time Since Counters Last Cleared	0 day 0 hr 1 min 0 sec
Port Mode	Disable
Port Forwarding State	Disabled
Port Role	Disabled
Designated Root	80:00:00:11:22:33:44:55
Designated Cost	0
Designated Bridge	80:00:00:11:22:33:44:55

Designated Port	00:00
Topology Change Acknowledge	False
Edge Port	Disabled
Point-to-point MAC	False
CST Regional Root	80:00:00:11:22:33:44:55
CST Path Cost	0

11.2.2.7.5. Configuring each Port MST Configuration Page

Selection Criteria

MST ID - Selects one MST instance from existing MST instances.

Slot/Port - Selects one of the physical or LAG interfaces associated with VLANs associated with the selected MST instance.

Configurable Data

Port Priority - The priority for a particular port within the selected MST instance. The port priority is set in multiples of 16. For example, if you set the priority to any value between 0 and 15, it will be set to 0. If it is tried to be set to any value between 16 and (2*16-1) it will be set to 16 and so on.

Port Path Cost - Set the Path Cost to a new value for the specified port in the selected MST instance. It takes a value in the range of 1 to 200000000.

Non-Configurable Data

Auto-calculate Port Path Cost - Displays whether the path cost is automatically calculated (Enabled) or not (Disabled). Path cost will be calculated based on the link speed of the port if the configured value for Port Path Cost is zero.

Port ID - The port identifier for the specified port within the selected MST instance. It is made up from the port priority and the interface number of the port.

Port Up Time Since Counters Last Cleared - Time since the counters were last cleared, displayed in Days, Hours, Minutes, and Seconds.

Port Mode - Spanning Tree Protocol Administrative Mode associated with the port or LAG. The possible values are Enable or Disable.

Port Forwarding State - The Forwarding State of this port.

Port Role - Each MST Bridge Port that is enabled is assigned a Port Role for each spanning tree. The port role will be one of the following values: Root Port, Designated Port, Alternate Port, Backup Port, Master Port, or Disabled Port.

Designated Root - Root Bridge for the selected MST instance. It is made up using the bridge priority and the base MAC address of the bridge.

Designated Cost - Path Cost offered to the LAN by the Designated Port.

Designated Bridge - Bridge Identifier of the bridge with the Designated Port. It is made up using the bridge priority and the base MAC address of the bridge.

Designated Port - Port Identifier on the Designated Bridge that offers the lowest cost to

the LAN. It is made up from the port priority and the interface number of the port.

Command Buttons

Submit - Applies the new configuration and causes the changes to take effect. These changes will not be retained across a power cycle unless a save configuration is performed.

Refresh - Refreshes the screen with most recent data.

Spanning Tree MST Port Configuration/Status	
MST ID	1
Unit/Slot/Port	1/0/1
Port Priority	128 (0 to 240)
Port Path Cost	0 (0 to 200000000) 0 = Auto
Auto-calculate Port Path Cost	Enabled
Port ID	80:01
Port Up Time Since Counters Last Cleared	0 day 0 hr 2 min 55 sec
Port Mode	Disabled
Port Forwarding State	Disabled
Port Role	Disabled
Designated Root	80:01:00:11:22:33:44:55
Designated Cost	0
Designated Bridge	80:01:00:11:22:33:44:55
Designated Port	00:00

Submit Refresh

11.2.2.7.6. Viewing Spanning Tree Statistics Page

Selection Criteria

Slot/Port - Selects one of the physical or LAG interfaces of the switch.

Non-Configurable Data

STP BPDUs Received - Number of STP BPDUs received at the selected port.

STP BPDUs Transmitted - Number of STP BPDUs transmitted from the selected port.

RSTP BPDUs Received - Number of RSTP BPDUs received at the selected port.




RSTP BPDUs Transmitted - Number of RSTP BPDUs transmitted from the selected port.

MSTP BPDUs Received - Number of MSTP BPDUs received at the selected port.

MSTP BPDUs Transmitted - Number of MSTP BPDUs transmitted from the selected port.

Command Buttons

Refresh - Refreshes the screen with most recent data.

Spanning Tree Statistics  **Print**  **Reload**  **Help**

Unit/Slot/Port:

STP BPDUs Received	0
STP BPDUs Transmitted	0
RSTP BPDUs Received	0
RSTP BPDUs Transmitted	0
MSTP BPDUs Received	0
MSTP BPDUs Transmitted	0

11.2.2.8 Defining 802.1p priority

11.2.2.8.1. Defining 802.1p Priority Mapping Page

Selection Criteria

Slot/Port - Select the physical interface for which you want to display or configure data. Select 'All' to set the parameters for all ports to the same values.

Configurable Data




Traffic Class - Specify which internal traffic class to map the corresponding 802.1p priority.

Non-Configurable Data

802.1p Priority - Displays the 802.1p priority to be mapped.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

802.1p Priority Mapping  **Print**  **Reload**  **Help**

Unit/Slot/Port:

802.1p Priority	Traffic Class
0	<input type="text" value="1"/>
1	<input type="text" value="0"/>
2	<input type="text" value="0"/>
3	<input type="text" value="1"/>
4	<input type="text" value="2"/>
5	<input type="text" value="2"/>
6	<input type="text" value="3"/>
7	<input type="text" value="3"/>

11.2.2.9 Managing Port Security


11.2.2.9.1. Configuring Port Security Administration Mode Page

Configurable Data

Allow Port Security - Used to enable or disable the Port Security feature.

Command Buttons

Submit - Applies the new configuration and causes the changes to take effect. These changes will not be retained across a power cycle unless a save configuration is performed.

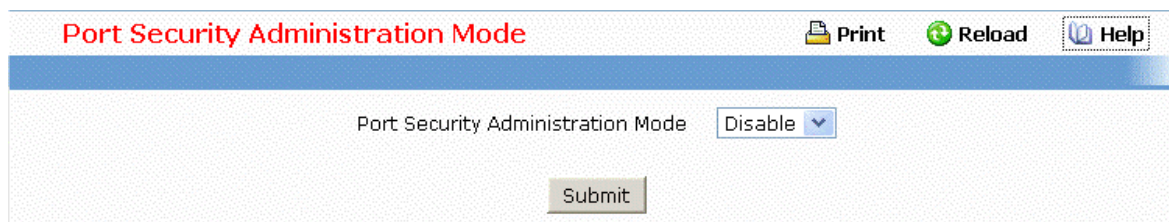The screenshot shows a web interface titled "Port Security Administration Mode" in red text. At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". Below the title bar, there is a label "Port Security Administration Mode" followed by a dropdown menu currently set to "Disable". At the bottom center, there is a "Submit" button.

11.2.2.9.2. Configuring Port Security Interface Page

Selection Criteria

Unit/Slot/Port - Selects the interface to be configured.

Configurable Data

Allow Port Security - Used to enable or disable the Port Security feature for the selected interface.

Maximum Dynamic MAC Addresses allowed - Sets the maximum number of dynamically locked MAC addresses on the selected interface.

Add a static MAC address- Adds a MAC address to the list of statically locked MAC addresses for the selected interface.

VLAN ID- Adds a corresponding VLAN ID for the MAC Address being added to the list of statically locked MAC addresses for the selected interface.

Maximum static MAC Addresses allowed- Sets the maximum number of dynamically locked MAC addresses on the selected interface.

Enable violation traps- Enables or disables the sending of new violation traps

designating when a packet with a disallowed MAC address is received on a locked port.

Command Buttons

Submit - Applies the new configuration and causes the changes to take effect. These changes will not be retained across a power cycle unless a save configuration is performed.

Move - Convert a dynamically locked MAC address to a statically locked address. The Dynamic MAC address entries are converted to Static MAC address entries in a numerically ascending order till the Static limit is reached.

Port Security Interface Configuration

Unit/Slot/Port: 1/0/1

Port Security: Disable

Maximum Number of Dynamically Learned MAC Addresses Allowed: 600 (0-600)

Add a Static MAC Address:

VLAN ID: 1 (1-3965)

Maximum Number of Statically Locked MAC Addresses Allowed: 20 (0-20)

Enable Violation Traps: No

Submit

Convert dynamically learned address to statically locked

Move

11.2.2.9.3. Deleting Port Security Statically Configured MAC Address Page

Selection Criteria

Unit/Slot/Port - Select the physical interface for which you want to display data.

VLAN ID - selects the VLAN ID corresponding to the MAC address being deleted.

Configurable data

MAC Address - Accepts user input for the MAC address to be deleted.

Non-configurable data

MAC Address - Displays the user specified statically locked MAC address.

VLAN ID - Displays the VLAN ID corresponding to the MAC address.


Delete a Static MAC Address - Deletes the MAC address from the Port-Security Static MAC address table.

VLAN ID - Displays the VLAN ID corresponding to the MAC address to be deleted from

the Static list.

Command Buttons

Submit - Applies the new configuration and causes the changes to take effect. These changes will not be retained across a power cycle unless a save configuration is performed.

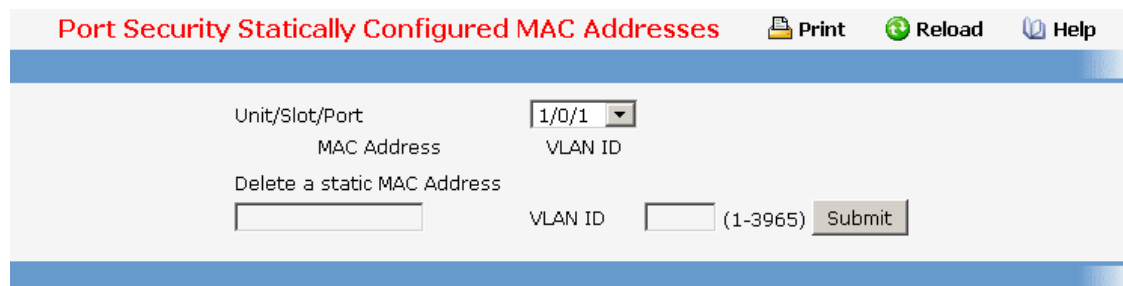

11.2.2.9.4. Viewing Port Security Dynamically Learnt MAC Address Page

Selection Criteria


Unit/Slot/Port - Select the physical interface for which you want to display data.

Non-configurable data

MAC Address - Displays the MAC addresses learned on a specific port.

VLAN ID - Displays the VLAN ID corresponding to the MAC address.

Number of Dynamic MAC addresses learned - Displays the number of dynamically learned MAC addresses on a specific port.

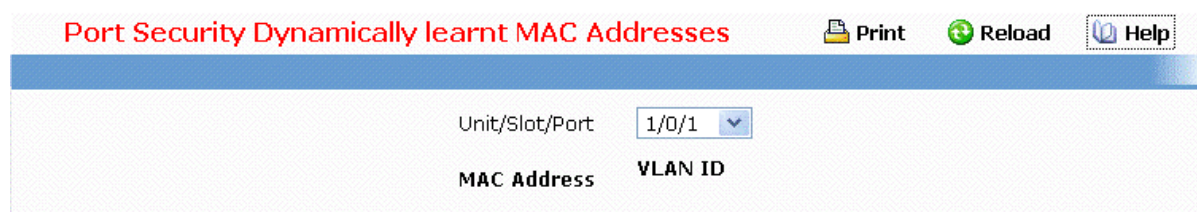

11.2.2.9.5. Viewing Port Security Violation Status Page

Selection Criteria

Unit/Slot/Port - Select the physical interface for which you want to display data.

Non-configurable data

Last Violation MAC Address - Displays the source MAC address of the last packet that

was discarded at a locked port.

VLAN ID - Displays the VLAN ID corresponding to the Last Violation MAC address.

Port Security Violation Status		Print	Reload	Help
Unit/Slot/Port	1/0/1			
Last Violation MAC address	VLAN ID			

11.2.2.10 Managing LLDP (Link Layer Discovery Protocol)

11.2.2.10.1. Global Configuration

Use this panel to configure the LLDP global configuration.

Configurable Data

LLDP Global Configuration		Print	Reload	Help
Transmit Interval	30 (1 to 32768)			
Hold Multiplier	4 (2 to 10)			
Re- Initialization Delay	2 (1 to 10)			
Notification Interval	5 (5 to 3600)			
Submit				

Transmit Interval: Shows how frequently the system transmits local data LLDPDUs, in seconds.

Transmit Hold Multiplier: Shows the multiplier on the transmit interval that sets the TTL in local data LLDPDUs.

Re-initialization Delay: Shows the delay before re-initialization, in seconds.

Notification Interval: Shows how frequently the system sends remote data change notifications, in seconds.

11.2.2.10.2. Interface Configuration

Use this panel to configure the configuration for each or all interfaces.

Selection Criteria

Unit/Slot/Port - Select the physical interface for which you want to configure. You can select one specific port or apply to all ports.

Transmit: Enable transmit LLDPDUs on the selected interface.

Receive: Enable receive LLDPDUs on the selected interface.

Notify: Enable "Send remote data change notification" on the selected interface.

Mgmt: Select to enable the interface transmits system management address information in the LLDPDUs.

TLVs: Select optional TLVs send by the LLDPDUs. The TLV codes can be System Name, System Description, System Capability, Port Description and Organization Specific.

Select the above criteria and apply "Submit".

LLDP Interface Configuration [Print](#) [Reload](#) [Help](#)

Interface	1/0/1
Transmit	Disable
Receive	Enable
Notify	Disable
Transmit Management Information	<input type="checkbox"/>
Optional TLV(s)	<input type="checkbox"/> System Name
	<input type="checkbox"/> System Description
	<input type="checkbox"/> System Capabilities
	<input type="checkbox"/> Port Description
	<input type="checkbox"/> Organization Specific

[Submit](#)

11.2.2.10.3. Interface Configuration

Use this page to see the summary of all the interfaces.

Non-configurable data

Interface: Shows the interface in a unit/slot/port format.

Link: Shows whether the link is up or down.

Transmit: Shows whether the interface transmits LLDPDUs.


Receive: Shows whether the interface receives LLDPDUs.


Notify: Shows whether the interface sends remote data change notifications.


TLVs: Shows whether the interface sends optional TLVs in the LLDPDUs. The Option TLV can be System Name, System Description, System Capability, Port Description and Organization Specific.

Transmit Management Information: Shows whether the interface transmits system management address information in the LLDPDUs.

LLDP Interface Summary

 Print

 Reload

 Help


Interface	Link Status	Transmit	Receive	Notify	Optional TLV(s)	Transmit Management Information
1/0/1	Link Down	Disabled	Disabled	Disabled	System Name System Description System Capabilities Port Description Organization Specific	Yes
1/0/2	Link Down	Disabled	Disabled	Disabled	System Name System Description System Capabilities Port Description Organization Specific	Yes
1/0/3	Link Down	Disabled	Disabled	Disabled	System Name System Description System Capabilities Port Description Organization Specific	Yes
1/0/4	Link Down	Disabled	Disabled	Disabled	System Name System Description System Capabilities Port Description Organization Specific	Yes
1/0/5	Link Down	Disabled	Disabled	Disabled	System Name System Description	Yes


11.2.2.10.4. LLDP Statistics


Use this page to see the LLDP statistic.

Non-configurable data

LLDP Statistics

 Print

 Reload

 Help

Last Update0 Days 00:00:00

Total Inserts0

Total Deletes0

Total Drops0

Total Ageouts0

Interface	Transmit Total	Receive Total	Discards	Errors	Ageouts	TLV Discards	TLV Unknowns
1/0/2	0	0	0	0	0	0	0
1/0/4	0	0	0	0	0	0	0

Refresh

Clear

Last Update: Shows the amount of time since the last update to the remote table in days, hours, minutes, and seconds.

Total Inserts: Total number of inserts to the remote data table.

Total Deletes: Total number of deletes from the remote data table.

Total Drops: Total number of times the complete remote data received was not inserted due to insufficient resources.

Total Ageouts: Total number of times a complete remote data entry was deleted because the Time to Live interval expired.

The interface table contains the following column headings:

Interface: Shows the interface in slot/port format.

Transmit Total: Total number of LLDP packets transmitted on the port.

Receive Total: Total number of LLDP packets received on the port.

Discards: Total number of LLDP frames discarded on the port for any reason.

Errors: The number of invalid LLDP frames received on the port.

Ageouts: Total number of times a complete remote data entry was deleted for the port because the Time to Live interval expired.

TVL Discards: Shows the number of TLVs discarded

TVL Unknowns: Total number of LLDP TLVs received on the port where the type value is in the reserved range, and not recognized.

11.2.2.10.5. Local Device Information

Use this panel to display the interface's LLDP local device information.

Selection Criteria

Unit/Slot/Port - Select the physical interface for which you want to configure. You can select one specific port or apply to all ports.

LLDP Local Device Information	
Interface	1/0/11
Chassis ID Subtype	MAC Address
Chassis ID	00:1E:68:DA:37:33
Port ID Subtype	MAC Address
Port ID	00:1E:68:DA:37:35
System Name	
System Description	Switch
Port Description	
System Capabilities Supported	bridge, router
System Capabilities Enabled	bridge
Management Address	192.168.2.1
Management Address Type	IPv4

Display Message

Interface: Identifies the interface that sends the LLDPDU.

Chassis ID Subtype: Shows the type of identification used in the Chassis ID field.

Chassis ID: Identifies the chassis of the local device.

Port ID Subtype: Identifies the type of port on the local device.

Port ID: Shows the port number that transmitted the LLDPDU.

System Name: Shows the system name of the local device.

System Description: Describes the local system by identifying the system name and versions of hardware, operating system, and networking software supported in the device.

Port Description: Describes the port in an alpha-numeric format.

System Capabilities Supported: Indicates the primary function(s) of the device.

System Capabilities Enabled: Shows which of the supported system capabilities are enabled.




Management Address: Lists the type of address and the specific address the local LLDP

agent uses to send and receive information.

.....

11.2.2.10.6. Local Device Summary

Use this panel to display the interface's LLDP local device Summary.

LLDP Local Device Summary			 Print	 Reload	 Help
Interface	Port ID	Port Description			
1/0/2	00:1E:68:DA:37:35				
1/0/4	00:1E:68:DA:37:35				
1/0/11	00:1E:68:DA:37:35				
			<input type="button" value="Refresh"/>		

Selection Criteria

Unit/Slot/Port - Select the physical interface for which you want to configure. You can select one specific port or apply to all ports.

Display Message

Interface: Identifies the interface in a slot/port format.

Port ID: Shows the port ID associated with this interface.

Port Description: Shows the port description associated with the interface.

11.2.2.10.7. Remote Device Information

Use this panel to display the interface's remote device information.

Selection Criteria

Unit/Slot/Port - Select the physical interface for which you want to configure. You can select one specific port or apply to all ports.

Display Message

These messages are leant from the remote interface. It depends on remote device's settings. Not all of the message will be seen.

Interface: Identifies the interface that sends the LLDPDU.

Chassis ID Subtype: Shows the type of identification used in the Chassis ID field.

Chassis ID: Identifies the chassis of the local device.

Port ID Subtype: Identifies the type of port on the local device.

Port ID: Shows the port number that transmitted the LLDPDU.

System Name: Shows the system name of the local device.

System Description: Describes the local system by identifying the system name and versions of hardware, operating system, and networking software supported in the device.

Port Description: Describes the port in an alpha-numeric format.

System Capabilities Supported: Indicates the primary function(s) of the device.

System Capabilities Enabled: Shows which of the supported system capabilities are

enabled.

Management Address: Lists the type of address and the specific address the local LLDP agent uses to send and receive information.

.....

LLDP Remote Device Information
Print
Reload
Help

Local Interface
1/0/11

Remote Device

Chassis ID Subtype
MAC Address

Chassis ID
00:16:36:12:FC:CF

Port ID Subtype
MAC Address

Port ID
00:16:36:12:FC:D1

System Name

System Description

Port Description

System Capabilities Supported

System Capabilities Enabled

Time to Live
108

Management Address

Address	Type
192.168.10.100	IPv4

11.2.2.10.8. Remote Device Summary

Use this panel to display the interface's LLDP remote device Summary.

LLDP Remote Device Summary
Print
Reload
Help

Local Interface	Chassis ID	Port ID	System Name
1/0/4			
1/0/11	00:16:36:12:FC:CF	00:16:36:12:FC:D1	

Refresh
Clear

Selection Criteria

Unit/Slot/Port - Select the physical interface for which you want to configure. You can select one specific port.

Display Message

Interface: Identifies the interface in a unit/slot/port format.

Chassis ID: Shows the switch's MAC address.

Port ID: Shows the port ID associated with this interface.

Port Description: Shows the port description associated with the interface.

11.2.3 Routing Menu

11.2.3.1 Managing ARP Table

11.2.3.1.1. Creating ARP entries

Use this panel to add an entry to the Address Resolution Protocol table.

Configurable Data

IP - Specifies all the existing static ARP along with an additional option "Create". When the user selects "Create" another text boxes "IP Address" and "MAC Address" appear where the user may enter IP address and MAC address to be configured.

IP Address - Enter the IP address you want to add. It must be the IP address of a device on a subnet attached to one of the switch's existing routing interfaces.

MAC Address - The unicast MAC address of the device. Enter the address as six two-digit hexadecimal numbers separated by colons, for example 00:06:29:32:81:40.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

The screenshot shows a web interface titled "ARP Configuration" in red text. At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a book icon labeled "Help". Below the title bar, there is a form with three input fields. The first field is labeled "IP" and has a dropdown menu with "Create" selected. The second field is labeled "IP Address" and contains the text "0.0.0.0". The third field is labeled "MAC Address" and contains the text "00:00:00:00:00:00". At the bottom of the form, there are two buttons: "Submit" and "Delete All".

11.2.3.1.2. Configuring ARP Table

You can use this panel to change the configuration parameters for the Address Resolution Protocol Table. You can also use this screen to display the contents of the table.

Configurable Data

Age Time - Enter the value you want the switch to use for the ARP entry ageout time. You must enter a valid integer, which represents the number of seconds it will take for an ARP entry to age out. The range for this field is 15 to 21600 seconds. The default value for Age Time is 1200 seconds.

Response Time - Enter the value you want the switch to use for the ARP response timeout. You must enter a valid integer, which represents the number of seconds the switch will wait for a response to an ARP request. The range for this field is 1 to 10 seconds. The default value for Response Time is 1 second.

Retries - Enter an integer which specifies the maximum number of times an ARP request will be retried. The range for this field is 0 to 10. The default value for Retries is 4.

Cache Size - Enter an integer which specifies the maximum number of entries for the ARP cache. The range for this field is 256 to 3200. The default value for Cache Size is 3200.

Dynamic Renew - This controls whether the ARP component automatically attempts to renew ARP Entries of type Dynamic when they age out. The default setting is Enable.

Remove from Table - Allows the user to remove certain entries from the ARP Table. The choices listed specify the type of ARP Entry to be deleted:

- **All Dynamic Entries**
- **All Dynamic and Gateway Entries**
- **Specific Dynamic/Gateway Entry** - Selecting this allows the user to specify the required IP Address
- **Specific Static Entry** - Selecting this allows the user to specify the required IP Address
- **Specific Interface** - Selecting this allows the user to specify the required interface
- **None** - Selected if the user does not want to delete any entry from the ARP Table

Remove IP Address - This appears only if the user selects Specific Dynamic/Gateway Entry or Specific Static Entry in the Remove from Table Drop Down List. Allows the user to enter the IP Address against the entry that is to be removed from the ARP Table.

Unit/Slot/Port - The routing interface associated with the ARP entry.

Non-Configurable Data

Total Entry Count - Total number of Entries in the ARP table.

Peak Total Entries - Highest value reached by Total Entry Count. This counter value is restarted whenever the ARP table Cache Size value is changed.

Active Static Entries - Total number of Active Static Entries in the ARP table.

Configured Static Entries - Total number of Configured Static Entries in the ARP table.

Maximum Static Entries - Maximum number of Static Entries that can be defined.

IP Address - The IP address of a device on a subnet attached to one of the switch's routing interfaces.

MAC Address - The unicast MAC address for the device. The format is six two-digit hexadecimal numbers separated by colons, for example 00:06:29:32:81:40.

Unit/Slot/Port - The routing interface associated with the ARP entry.

Type - The type of the ARP entry:

- **Local** - An ARP entry associated with one of the switch's routing interface's MAC addresses
- **Gateway** - A dynamic ARP entry whose IP address is that of a router
- **Static** - An ARP entry configured by the user
- **Dynamic** - An ARP entry which has been learned by the router

Age - Age since the entry was last refreshed in the ARP Table. The format is hh:mm:ss.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

The screenshot shows the 'ARP Table Configuration' web page. At the top, there are links for 'Print', 'Reload', and 'Help'. The main configuration area contains the following fields:

Age Time (secs)	1200	(15 to 21600)
Response Time (secs)	1	(1 to 10)
Retries	4	(0 to 10)
Cache Size	232	(56 to 232)
Dynamic Renew	Enable	
Total Entry Count	0	
Peak Total Entries	0	
Active Static Entries	0	
Configured Static Entries	0	
Maximum Static Entries	16	
Remove from Table	None	

Below the fields is a 'Submit' button. At the bottom, there is a table header for the ARP table:

IP Address	MAC Address	Unit/Slot/Port	Type	Age
------------	-------------	----------------	------	-----

11.2.3.2 Managing IP Interfaces

11.2.3.2.1. Configuring IP

Use this menu to configure routing parameters for the switch as opposed to an interface.

Configurable Data

Routing Mode - Select enable or disable from the pulldown menu. You must enable routing for the switch before you can route through any of the interfaces. The default value is disable.

IP Forwarding Mode - Select enable or disable from the pulldown menu. This enables or disables the forwarding of IP frames. The default value is enable.

Non-Configurable Data

Default Time to Live - The default value inserted into the Time-To-Live field of the IP header of datagrams originated by the switch, if a TTL value is not supplied by the transport layer protocol.

Maximum Next Hops - The maximum number of hops supported by the switch. This is a compile-time constant.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

IP Configuration

Print Reload Help

Default Time to Live 30

Routing Mode Enable

IP Forwarding Mode Enable

Maximum Next Hops 1

Submit

11.2.3.2.2. Viewing IP Statistics

The statistics reported on this panel are as specified in RFC 1213.

Non-Configurable Data

IpInReceives - The total number of input datagrams received from interfaces, including those received in error.

IpInHdrErrors - The number of input datagrams discarded due to errors in their IP headers, including bad checksums, version number mismatch, other format errors, time-to-live exceeded, errors discovered in processing their IP options, etc.

IpInAddrErrors - The number of input datagrams discarded because the IP address in their IP header's destination field was not a valid address to be received at this entity. This count includes invalid addresses (e.g., 0.0.0.0) and addresses of unsupported Classes (e.g., Class E). For entities which are not IP Gateways and therefore do not forward datagrams, this counter includes datagrams discarded because the destination address was not a local address.

IpForwDatagrams - The number of input datagrams for which this entity was not their final IP destination, as a result of which an attempt was made to find a route to forward them to that final destination. In entities which do not act as IP Gateways, this counter will

include only those packets which were Source-Routed via this entity, and the Source-Route option processing was successful.

IpInUnknownProtos - The number of locally-addressed datagrams received successfully but discarded because of an unknown or unsupported protocol.

IpInDiscards - The number of input IP datagrams for which no problems were encountered to prevent their continued processing, but which were discarded (e.g., for lack of buffer space). Note that this counter does not include any datagrams discarded while awaiting re-assembly.

IpInDelivers - The total number of input datagrams successfully delivered to IP user-protocols (including ICMP).

IpOutRequests - The total number of IP datagrams which local IP user-protocols (including ICMP) supplied to IP in requests for transmission. Note that this counter does not include any datagrams counted in ipForwDatagrams.

IpOutDiscards - The number of output IP datagrams for which no problem was encountered to prevent their transmission to their destination, but which were discarded (e.g., for lack of buffer space). Note that this counter would include datagrams counted in ipForwDatagrams if any such packets met this (discretionary) discard criterion.

IpNoRoutes - The number of IP datagrams discarded because no route could be found to transmit them to their destination. Note that this counter includes any packets counted in ipForwDatagrams which meet this 'no-route' criterion. Note that this includes any datagrams which a host cannot route because all of its default gateways are down.

IpReasmTimeout - The maximum number of seconds which received fragments are held while they are awaiting reassembly at this entity.

IpReasmReqds - The number of IP fragments received which needed to be reassembled at this entity.

IpReasmOKs - The number of IP datagrams successfully re-assembled.

IpReasmFails - The number of failures detected by the IP re-assembly algorithm (for whatever reason: timed out, errors, etc). Note that this is not necessarily a count of discarded IP fragments since some algorithms can lose track of the number of fragments by combining them as they are received.

IpFragOKs - The number of IP datagrams that have been successfully fragmented at this entity.

IpFragFails - The number of IP datagrams that have been discarded because they needed to be fragmented at this entity but could not be, e.g., because their Don't Fragment flag was set.

IpFragCreates - The number of IP datagram fragments that have been generated as a result of fragmentation at this entity.

IpRoutingDiscards - The number of routing entries which were chosen to be discarded even though they are valid. One possible reason for discarding such an entry could be to free-up buffer space for other routing entries.

IcmpInMsgs - The total number of ICMP messages which the entity received. Note that this counter includes all those counted by icmpInErrors.

IcmpInErrors - The number of ICMP messages which the entity received but determined as having ICMP-specific errors (bad ICMP checksums, bad length, etc.).

IcmpInDestUnreachs - The number of ICMP Destination Unreachable messages received.

IcmpInTimeExcds - The number of ICMP Time Exceeded messages received.

IcmpInParmProbs - The number of ICMP Parameter Problem messages received.

IcmpInSrcQuenchs - The number of ICMP Source Quench messages received.

IcmpInRedirects - The number of ICMP Redirect messages received.

IcmpInEchos - The number of ICMP Echo (request) messages received.

IcmpInEchoReps - The number of ICMP Echo Reply messages received.

IcmpInTimestamps - The number of ICMP Timestamp (request) messages received.

IcmpInTimestampReps - The number of ICMP Timestamp Reply messages received.

IcmpInAddrMasks - The number of ICMP Address Mask Request messages received.

IcmpInAddrMaskReps - The number of ICMP Address Mask Reply messages received.

IcmpOutMsgs - The total number of ICMP messages which this entity attempted to send. Note that this counter includes all those counted by icmpOutErrors.

IcmpOutErrors - The number of ICMP messages which this entity did not send due to problems discovered within ICMP such as a lack of buffers. This value should not include errors discovered outside the ICMP layer such as the inability of IP to route the resultant datagram. In some implementations there may be no types of error which contribute to this counter's value.

IcmpOutDestUnreachs - The number of ICMP Destination Unreachable messages sent.

IcmpOutTimeExcds - The number of ICMP Time Exceeded messages sent.

IcmpOutParmProbs - The number of ICMP Parameter Problem messages sent.

IcmpOutSrcQuenchs - The number of ICMP Source Quench messages sent.

IcmpOutRedirects - The number of ICMP Redirect messages sent. For a host, this object will always be zero, since hosts do not send redirects.

IcmpOutEchos - The number of ICMP Echo (request) messages sent.

IcmpOutEchoReps - The number of ICMP Echo Reply messages sent.

IcmpOutTimestamps - The number of ICMP Timestamp (request) messages.

IcmpOutTimestampReps - The number of ICMP Timestamp Reply messages sent.


IcmpOutAddrMasks - The number of ICMP Address Mask Request messages sent.

IcmpOutAddrMaskReps - The number of ICMP Address Mask Reply messages sent.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

IP Statistics		Print	Reload	Help
	IpInReceives	1454		
	IpInHdrErrors	0		
	IpInAddrErrors	0		
	IpForwDatagrams	0		
	IpInUnknownProtos	0		
	IpInDiscards	0		
	IpInDelivers	1455		
	IpOutRequests	930		
	IpOutDiscards	0		
	IpOutNoRoutes	0		
	IpReasmTimeout	0		
	IpReasmReqds	0		
	IpReasmOKs	0		
	IpReasmFails	0		
	IpFragOKs	0		
	IpFragFails	0		
	IpFragCreates	0		
	IpRoutingDiscards	0		
	IcmpInMsgs	0		
	IcmpInErrors	0		
	IcmpInDestUnreachs	0		
	IcmpInTimeExcds	0		
	IcmpInParmProbs	0		
	IcmpInSrcQuenchs	0		
	IcmpInRedirects	0		
	IcmpInEchos	0		
	IcmpInEchoReps	0		
	IcmpInTimestamps	0		
	IcmpInTimestampReps	0		
	IcmpInAddrMasks	0		
	IcmpInAddrMaskReps	0		
	IcmpOutMsgs	0		
	IcmpOutErrors	0		
	IcmpOutDestUnreachs	0		
	IcmpOutTimeExcds	0		
	IcmpOutParmProbs	0		
	IcmpOutSrcQuenchs	0		
	IcmpOutRedirects	0		
	IcmpOutEchos	0		
	IcmpOutEchoReps	0		
	IcmpOutTimestamps	0		
	IcmpOutTimestampReps	0		
	IcmpOutAddrMasks	0		

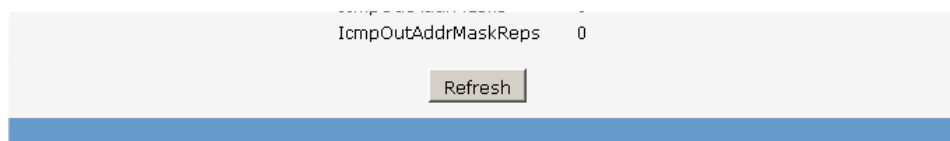

The screenshot shows a configuration window with a light gray background. At the top, there is a label 'IcmpOutAddrMaskReps' followed by a text input field containing the number '0'. Below this, there is a button labeled 'Refresh'. The entire configuration area is enclosed in a light gray border. Below the configuration area, there is a solid blue horizontal bar.

11.2.3.2.3. Configuring IP Interfaces

Selection Criteria

Unit/Slot/Port - Select the interface for which data is to be displayed or configured.

Configurable Data

IP Address - Enter the IP address for the interface.

Subnet Mask - Enter the subnet mask for the interface. This is also referred to as the subnet/network mask, and defines the portion of the interface's IP address that is used to identify the attached network.

Routing Mode - Setting this enables or disables routing for an interface. The default value is enable.

Administrative Mode - The Administrative Mode of the interface. The default value is enable.

Forward Net Directed Broadcasts - Select how network directed broadcast packets should be handled. If you select enable from the pulldown menu network directed broadcasts will be forwarded. If you select disable they will be dropped. The default value is disable.

Encapsulation Type - Select the link layer encapsulation type for packets transmitted from the specified interface from the pulldown menu. The possible values are Ethernet and SNAP. The default is Ethernet.

Proxy Arp - Select to disable or enable proxy Arp for the specified interface from the pulldown menu.

IP MTU - Specifies the maximum transmission unit (MTU) size of IP packets sent on an interface. Valid range is (68 to 1500). Default value is 1500.

Non-Configurable Data

Active State - The state of the specified interface is either Active or Inactive. An interface is considered active if it the link is up and it is in forwarding state.

MAC Address - The burned-in physical address of the specified interface. The format is six two-digit hexadecimal numbers separated by colons, for example 00:06:29:32:81:40.

Command Buttons

Submit - Update the switch with the values on this screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

Delete IP Address - Delete the IP Address from the interface. Note that the address can not be deleted if there are secondary addresses configured.

Secondary IP Address - Proceed to the Secondary IP Address configuration screen.

IP Interface Configuration	
Unit/Slot/Port	1/0/1
IP Address	0.0.0.0
Subnet Mask	0.0.0.0
Routing Mode	Disable
Administrative Mode	Enable
Link Speed Data Rate	
Forward Net Directed Broadcasts	Disable
Active State	Inactive
MAC Address	00:11:22:33:44:57
Encapsulation Type	Ethernet
Proxy Arp	Enable
IP MTU	1500 (68 to 1500)
<input type="button" value="Submit"/>	

11.2.3.3 Managing OSPF

11.2.3.3.1. Configuring OSPF

Configurable Data

Router ID - The 32 bit integer in dotted decimal format that uniquely identifies the router within the autonomous system (AS). If you want to change the Router ID you must first disable OSPF. After you set the new Router ID, you must re-enable OSPF to have the change take effect. The default value is 0.0.0.0, although this is not a valid Router ID.

OSPF Admin Mode* - Select enable or disable from the pulldown menu. If you select enable OSPF will be activated for the switch. The default value is disable. You must configure a Router ID before OSPF can become operational. You do this on the IP Configuration page or by issuing the CLI command: config router id.

***NOTE: once OSPF is initialized on the router, it will remain initialized until the router is reset.**

RFC 1583 Compatibility - Select enable or disable from the pulldown menu to specify the preference rules that will be used when choosing among multiple AS-external-LSAs

advertising the same destination. If you select enable, the preference rules will be those defined by RFC 1583. If you select disable, the preference rules will be those defined in Section 16.4.1 of the OSPF-2 standard (RFC 2328), which will prevent routing loops when AS-external-LSAs for the same destination have been originated from different areas. The default value is 'enable'. To prevent routing loops, you should select 'disable', but only if all OSPF routers in the routing domain are capable of operating according to RFC 2328.

Exit Overflow Interval - Enter the number of seconds that, after entering overflow state, the router should wait before attempting to leave overflow state. This allows the router to again originate non-default AS-external-LSAs. If you enter 0, the router will not leave Overflow State until restarted. The range is 0 to 2147483647 seconds.

Default Metric - Sets a default for the metric of redistributed routes. This field displays the default metric if one has already been set or blank if not configured earlier. The valid values are (1 to 16777215)

Maximum Paths - Sets the maximum number of paths that OSPF can report for a given destination. The valid values are (1 to 6).

Default Information Originate - Enable or Disable Default Route Advertise.

Always - Sets the router advertise 0.0.0.0/0.0.0.0 when set to "True".

Metric - Specifies the metric of the default route. The valid values are (0 to 16777215)

Metric Type - Sets the metric type of the default route.

Non-Configurable Data

ASBR Mode - Reflects whether the ASBR mode is enabled or disabled. Enable implies that the router is an autonomous system border router. Router automatically becomes an ASBR when it is configured to redistribute routes learnt from other protocol.

ABR Status - The values of this are enabled or disabled. Enabled implies that the router is an area border router. Disabled implies that it is not an area border router.

External LSA Count - The number of external (LS type 5) LSAs (link state advertisements) in the link state database.

External LSA Checksum - The sum of the LS checksums of the external LSAs (link state advertisements) contained in the link-state database. This sum can be used to determine if there has been a change in a router's link state database, and to compare the link-state databases of two routers.

New LSAs Originated - In any given OSPF area, a router will originate several LSAs. Each router originates a router-LSA. If the router is also the Designated Router for any of the area's networks, it will originate network-LSAs for those networks. This value represents the number of LSAs originated by this router.

LSAs Received - The number of LSAs (link state advertisements) received that were determined to be new instantiations. This number does not include newer instantiations of self-originated LSAs.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

OSPF Configuration Print Reload Help

Router ID	<input type="text" value="0.0.0.0"/>
OSPF Admin Mode	<input type="button" value="Enable"/>
ASBR Mode	<input type="button" value="Disabled"/>
RFC 1583 Compatibility	<input type="button" value="Enable"/>
ABR Status	
Exit Overflow Interval (secs)	<input type="text" value="0"/> (0 to 2147483647)
External LSA Count	
External LSA Checksum	
New LSAs Originated	
LSAs Received	
Default Metric	<input type="text"/> (1 to 16777215)
Maximum Paths	<input type="text"/> (1 to 6)
Default Route Advertise	
Default Information Originate	<input type="button" value="Disable"/>
Always	<input type="button" value="False"/>
Metric	<input type="text"/> (0 to 16777215)
Metric Type	<input type="button" value="External Type 2"/>

11.2.3.3.2. Configuring Area

Selection Criteria

Area ID - Select the area to be configured.

Configurable Data

Import Summary LSAs - Select enable or disable from the pulldown menu. If you select enable summary LSAs will be imported into stub areas.

Metric Value - Enter the metric value you want applied for the default route advertised into the stub area. Valid values range from 1 to 16,777,215.

Metric Type - Select the type of metric specified in the Metric Value field.

- **OSPF Metric** - Regular OSPF metric
- **Comparable Cost** - External Type 1 metrics that are comparable to the OSPF metric
- **Non-comparable Cost** - External Type 2 metrics that are assumed to be larger than the cost of the OSPF metric

Translator Role - Select Always or Candidate from the pulldown menu. A value of always will cause the router to assume the role of the translator when it becomes a border router and a value of candidate will cause the router to participate in the translator election process when it attains border router status.

Translator Stability Interval - Enter the translator stability interval of the NSSA. The stability interval is the period of time that an elected translator continues to perform its duties after it determines that its translator status has been deposed by another router. Valid values range from 0 to 3600.

No-Redistribute Mode - Select enable or disable from the pulldown menu. If you select enable learned external routes will not be redistributed to the NSSA.

Non-Configurable Data

Area ID - The OSPF area. An Area ID is a 32 bit integer in dotted decimal format that uniquely identifies the area to which a router interface connects.

Aging Interval - The Link State Advertisement (LSA) aging timer interval.

External Routing - A definition of the router's capabilities for the area, including whether or not AS-external-LSAs are flooded into/throughout the area. If the area is a stub area, then these are the possible options for which you may configure the external routing capability, otherwise the only option is "Import External LSAs".

- **Import External LSAs** - Import and propagate external LSAs
- **Import No LSAs** - Do not import and propagate external LSAs

Authentication Type

Currently set to 'None'.

SPF Runs - The number of times that the intra-area route table has been calculated using this area's link-state database. This is typically done using Dijkstra's algorithm.

Area Border Router Count - The total number of area border routers reachable within this area. This is initially zero, and is calculated in each SPF Pass.

Area LSA Count - The total number of link-state advertisements in this area's link-state database, excluding AS External LSAs.

Area LSA Checksum - The 32-bit unsigned sum of the link-state advertisements' LS checksums contained in this area's link-state database. This sum excludes external (LS type 5) link-state advertisements. The sum can be used to determine if there has been a change in a router's link state database, and to compare the link-state database of two routers.

Mode - This field tells you whether the area is or is not a stub area. If the area may be a stub area, a 'Create Stub Area' button will be displayed. If you have configured the area as a stub area a 'Delete Stub Area' button will be displayed. Otherwise neither button will be displayed.

Type of Service - The type of service associated with the stub metric. The switch supports Normal only.

Translator Status - The field tells you the translator is enabled or disabled.

Command Buttons

Create Stub Area - Configure the area as a stub area.

Delete Stub Area - Delete the stub area designation. The area will be returned to normal state.

Create NSSA - Configure the area as a NSSA

Delete NSSA - Delete the NSSA. The area will be returned to normal state.

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

OSPF Area ConfigurationPrintReloadHelp

Area	1.1.1.1
Area ID	1.1.1.1
Aging Interval (secs)	10
External Routing	Import External LSAs
SPF Runs	1
Area Border Router Count	0
Area LSA Count	1
Area LSA Checksum	27486
Stub Area Information	
Interface Mode	None

Create Stub AreaCreate NSSASubmit

Stub Area Information

Interface Mode	Stub Area
Import Summary LSAs	<input type="button" value="Enable"/>
Type of Service	Normal
Metric Value	<input type="text" value="1"/> (1 to 16777215)
Metric Type	<input type="button" value="Metric"/>

Stub Area Information

Interface Mode	NSSA
Import Summary LSAs	<input type="button" value="Enable"/>
Metric Value	<input type="text" value="10"/> (1 to 16777215)
Metric Type	<input type="button" value="Non-comparable Cost"/>
Translator Role	<input type="button" value="Candidate"/>
Translator Stability Interval	<input type="text" value="40"/> (0 to 3600)
No-Redistribute Mode	<input type="button" value="Enable"/>
Translator State	Disabled

11.2.3.3.3. Viewing Stub Area Summary Information

Non-Configurable Data

Area ID - The Area ID of the Stub area

Type of Service - The type of service associated with the stub metric. The switch supports Normal only.

Metric Value - Set the metric value you want applied for the default route advertised into the area. Valid values range from 1 to 16,777,215.



Metric Type - The type of metric for the stub area where valid types are:

- OSPF Metric - Regular OSPF metric
- Comparable Cost - External Type 1 metrics that are comparable to the OSPF metric
- Non-comparable Cost - External Type 2 metrics that are assumed to be larger than the cost of the OSPF metric

Import Summary LSAs - Whether the import of Summary LSAs is enabled or disabled.

Command Buttons

Refresh - Refresh the data on the screen to the current values from the switch.

OSPF Stub Area Summary				
 Print  Reload  Help				
Area ID	Type of Service	Metric Value	Metric Type	Import Summary LSAs
1.1.1.1	Normal	1	OSPF Metric	Enable
<input type="button" value="Refresh"/>				

11.2.3.3.4. Configuring Area Range

Selection Criteria

Area ID - Selects the area for which data is to be configured.

Configurable Data

IP address - Enter the IP Address for the address range for the selected area.

Subnet Mask - Enter the Subnet Mask for the address range for the selected area.

LSDB Type - Select the type of Link Advertisement associated with the specified area and address range. The default type is 'Network Summary'.

Advertisement - Select enable or disable from the pulldown menu. If you selected enable the address range will be advertised outside the area via a Network Summary LSA. The default is enable.

Non-Configurable Data

Area ID - The OSPF area.

IP address - The IP Address of an address range for the area.

Subnet Mask - The Subnet Mask of an address range for the area.

LSDB Type - The Link Advertisement type for the address range and area.




Advertisement - The Advertisement mode for the address range and area.

Command Buttons

Create - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed. The new address range will be added to the display in the non-configurable data area.

Delete - Removes the specified address range from the area configuration.

OSPF Area Range Configuration

 Print
  Reload
  Help

Area ID	IP Address	Subnet Mask	LSDB Type	Advertisement
<input type="text" value="1.1.1.1"/>	<input type="text"/>	<input type="text"/>	<input type="text" value="Network Summary"/>	<input type="text" value="Enable"/>
Area ID	IP Address	Subnet Mask	LSDB Type	Advertisement

11.2.3.3.5. View Interface Statistics

This panel displays statistics for the selected interface. The information will be displayed only if OSPF is enabled.

Selection Criteria

Unit/Slot/Port - Select the interface for which data is to be displayed.

Non-Configurable Data

OSPF Area ID - The OSPF area to which the selected router interface belongs. An OSPF Area ID is a 32 bit integer in dotted decimal format that uniquely identifies the area to which the interface connects.

SPF Runs - The number of times that the intra-area route table has been calculated using this area's link-state database.

Area Border Router Count - The total number of area border routers reachable within this area. This is initially zero, and is calculated in each SPF Pass.

AS Border Router Count - The total number of Autonomous System border routers reachable within this area. This is initially zero, and is calculated in each SPF Pass.

Area LSA Count - The total number of link-state advertisements in this area's link-state database, excluding AS External LSAs.

IP Address - The IP address of the interface.

Interface Events - The number of times the specified OSPF interface has changed its state, or an error has occurred.

Virtual Events - The number of state changes or errors that have occurred on this virtual link.

Neighbor Events - The number of times this neighbor relationship has changed state, or an error has occurred.

External LSA Count - The number of external (LS type 5) link-state advertisements in the link-state database.

Originate New LSAs - The number of new link-state advertisements that have been originated. In any given OSPF area, a router will originate several LSAs. Each router originates a router-LSA. If the router is also the Designated Router for any of the area's networks, it will originate network-LSAs for those networks.

LSAs Received - The number of link-state advertisements that have been received that have been determined to be new instantiations. This number does not include newer instantiations of self-originated link-state advertisements.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

OSPF Interface Statistics	
Unit/Slot/Port	1/0/10
OSPF Area ID	1.1.1.1
SPF Runs	5
Area Border Router Count	0
AS Border Router Count	0
Area LSA Count	1
IP Address	192.168.3.1
Interface Events	10
Virtual Events	0
Neighbor Events	0
External LSA Count	0
Originate New LSAs	8
LSAs Received	0

Refresh

11.2.3.3.6. Configuring OSPF Interface

Selection Criteria

Unit/Slot/Port - Select the interface for which data is to be displayed or configured.

Configurable Data

OSPF Admin Mode* - You may select enable or disable from the pulldown menu. The default value is 'disable.' You can configure OSPF parameters without enabling OSPF Admin Mode, but they will have no effect until you enable Admin Mode. The following information will be displayed only if the Admin Mode is enabled: State, Designated Router, Backup Designated Router, Number of Link Events, LSA Ack Interval, and Metric Cost. For OSPF to be fully functional, you must enter a valid IP Address and Subnet Mask via the Interface IP Configuration page or through the CLI command: config ip interface

network .

***NOTE:** once OSPF is initialized on the router, it will remain initialized until the router is reset.

OSPF Area ID - Enter the 32 bit integer in dotted decimal format that uniquely identifies the OSPF area to which the selected router interface connects. If you assign an Area ID which does not exist, the area will be created with default values.

Router Priority - Enter the OSPF priority for the selected interface. The priority of an interface is specified as an integer from 0 to 255. The default is 1, which is the highest router priority. A value of '0' indicates that the router is not eligible to become the designated router on this network

Retransmit Interval - Enter the OSPF retransmit interval for the specified interface. This is the number of seconds between link-state advertisements for adjacencies belonging to this router interface. This value is also used when retransmitting database descriptions and link-state request packets. Valid values range from 1 to 3600 seconds (1 hour). The default is 5 seconds.

Hello Interval - Enter the OSPF hello interval for the specified interface in seconds. This parameter must be the same for all routers attached to a network. Valid values range from 1 to 65,535. The default is 10 seconds.

Dead Interval - Enter the OSPF dead interval for the specified interface in seconds. This specifies how long a router will wait to see a neighbor router's Hello packets before declaring that the router is down. This parameter must be the same for all routers attached to a network. This value should be a multiple of the Hello Interval (e.g. 4). Valid values range from 1 to 2147483647. The default is 40.

Iftransit Delay Interval - Enter the OSPF Transit Delay for the specified interface. This specifies the estimated number of seconds it takes to transmit a link state update packet over the selected interface. Valid values range from 1 to 3600 seconds (1 hour). The default value is 1 second.

MTU Ignore - Disables OSPF MTU mismatch detection on receiving packets. Default value is Disable.

Authentication Type - You may select an authentication type other than none by clicking on the 'Configure' button. You will then see a new screen, where you can select the authentication type from the pulldown menu. The choices are:

- **None** - This is the initial interface state. If you select this option from the pulldown menu on the second screen you will be returned to the first screen and no authentication protocols will be run.
- **Simple** - If you select 'Simple' you will be prompted to enter an authentication key. This key will be included, in the clear, in the OSPF header of all packets sent on the network. All routers on the network must be configured with the same key.
- **Encrypt** - If you select 'Encrypt' you will be prompted to enter both an authentication key and an authentication ID. Encryption uses the MD5 Message-Digest algorithm. All routers on the network must be configured with the same key and ID.

Authentication Key - Enter the OSPF Authentication Key for the specified interface. If you do not choose to use authentication you will not be prompted to enter a key. If you choose 'simple' authentication you cannot use a key of more than 8 octets. If you choose 'encrypt' the key may be up to 16 octets long. The key value will only be displayed if you are logged on with Read/Write privileges, otherwise it will be displayed as asterisks.

Authentication ID - Enter the ID to be used for authentication. You will only be prompted to enter an ID when you select 'Encrypt' as the authentication type. The ID is a number between 0 and 255, inclusive.

Metric Cost - Enter the value on this interface for the cost TOS (type of service). The range for the metric cost is between 1 and 65,535. Metric Cost is only configurable/displayed if OSPF is initialized on the interface.

Non-Configurable Data

IP Address - The IP address of the interface.

Subnet Mask - The subnet/network mask, that indicates the portion of the IP interface address that identifies the attached network.

LSA Ack Interval - The number of seconds between LSA Acknowledgment packet transmissions, which must be less than the Retransmit Interval.

OSPF Interface Type - The OSPF interface type, which will always be broadcast.

State - The current state of the selected router interface. One of:

- **Down** - This is the initial interface state. In this state, the lower-level protocols have indicated that the interface is unusable. In this state, interface parameters will be set to their initial values. All interface timers will be disabled, and there will be no adjacencies associated with the interface.
- **Loopback** - In this state, the router's interface to the network is looped back either in hardware or software. The interface is unavailable for regular data traffic. However, it may still be desirable to gain information on the quality of this interface, either through sending ICMP pings to the interface or through something like a bit error test. For this reason, IP packets may still be addressed to an interface in Loopback state. To facilitate this, such interfaces are advertised in router- LSAs as single host routes, whose destination is the IP interface address.
- **Waiting** - The router is trying to determine the identity of the (Backup) Designated Router for the network by monitoring received Hello Packets. The router is not allowed to elect a Backup Designated Router or a Designated Router until it transitions out of Waiting state. This prevents unnecessary changes of (Backup) Designated Router.
- **Designated Router** - This router is itself the Designated Router on the attached network. Adjacencies are established to all other routers attached to the network. The router must also originate a network-LSA for the network node. The network- LSA will contain links to all routers (including the Designated Router itself) attached to the network.
- **Backup Designated Router** - This router is itself the Backup Designated Router on the attached network. It will be promoted to Designated Router if the present Designated Router fails. The router establishes adjacencies to all other routers

attached to the network. The Backup Designated Router performs slightly different functions during the Flooding Procedure, as compared to the Designated Router.

- **Other Designated Router** - The interface is connected to a broadcast or NBMA network on which other routers have been selected to be the Designated Router and Backup Designated Router either. The router attempts to form adjacencies to both the Designated Router and the Backup Designated Router.

The State is only displayed if the OSPF admin mode is enabled.

Designated Router - The identity of the Designated Router for this network, in the view of the advertising router. The Designated Router is identified here by its router ID. The value 0.0.0.0 means that there is no Designated Router. This field is only displayed if the OSPF admin mode is enabled.

Backup Designated Router - The identity of the Backup Designated Router for this network, in the view of the advertising router. The Backup Designated Router is identified here by its router ID. Set to 0.0.0.0 if there is no Backup Designated Router. This field is only displayed if the OSPF admin mode is enabled.

Number of Link Events - This is the number of times the specified OSPF interface has changed its state. This field is only displayed if the OSPF admin mode is enabled.

Command Buttons

Configure Authentication - Display a new screen where you can select the authentication method for the virtual link.

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

OSPF Interface Configuration
Print
Reload
Help

Unit/Slot/Port	1/0/1
IP Address	0.0.0.0
Subnet Mask	0.0.0.0
OSPF Admin Mode	Disable
OSPF Area ID	0.0.0.0
Router Priority	1 (0 to 255)
Retransmit Interval (secs)	5 (0 to 3600)
Hello Interval (secs)	10 (1 to 65535)
Dead Interval (secs)	40 (1 to 2147483647)
LSA Ack Interval (secs)	1
Iftransit Delay Interval (secs)	1 (1 to 3600)
MTU Ignore	Disable
Authentication Type	None
Interface Type	Broadcast
State	

Configure

Designated Router	
Backup Designated Router	
Number of Link Events	
Metric Cost	<input type="text" value="1"/> (1 to 65535)
<input type="button" value="Submit"/>	

11.2.3.3.7. Viewing Neighbor Table Information

This panel displays the OSPF neighbor table list. When a particular neighbor ID is specified, detailed information about a neighbor is given. The information below will only be displayed if OSPF is enabled.

Selection Criteria

Unit/Slot/Port - Selects the interface for which data is to be displayed or configured. Slot 0 is the base unit.

Non-Configurable Data

Router ID - A 32 bit integer in dotted decimal format representing the neighbor interface.

IP Address - The IP address of the neighboring router's interface to the attached network. It is used as the destination IP address when protocol packets are sent as unicasts along this adjacency. Also used in router-LSAs as the Link ID for the attached network if the neighboring router is selected to be designated router. The Neighbor IP address is learned when Hello packets are received from the neighbor. For virtual links, the Neighbor IP address is learned during the routing table build process.

Neighbor Interface Index - A Unit/Slot/Port identifying the neighbor interface index.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

OSPF Neighbor Table			Print	Reload	Help
Unit/Slot/Port: <input type="text" value="All"/>					
Router ID	IP Address	Neighbor Interface Index			
10.1.1.1	192.168.3.1	2/0/10			
<input type="button" value="Refresh"/>					

11.2.3.3.8. Configuring OSPF Neighbor

This panel displays the OSPF neighbor configuration for a selected neighbor ID. When a particular neighbor ID is specified, detailed information about a neighbor is given. The information below will only be displayed if OSPF is enabled and the interface has a neighbor. The IP address is the IP address of the neighbor.

Selection Criteria

Unit/Slot/Port - Selects the interface for which data is to be displayed or configured. Slot 0 is the base unit.

Neighbor IP Address - Selects the IP Address of the neighbor for which data is to be displayed.

Non-Configurable Data

Router ID - A 32 bit integer in dotted decimal format that identifies the neighbor router.

Options - The optional OSPF capabilities supported by the neighbor. The neighbor's optional OSPF capabilities are also listed in its Hello packets. This enables received Hello Packets to be rejected (i.e., neighbor relationships will not even start to form) if there is a mismatch in certain crucial OSPF capabilities.

Router Priority - Displays the OSPF priority for the specified neighbor. The priority of a neighbor is a priority integer from 0 to 255. A value of '0' indicates that the router is not eligible to become the designated router on this network.

State - The state of a neighbor can be the following:

- **Down** - This is the initial state of a neighbor conversation. It indicates that there has been no recent information received from the neighbor. On NBMA networks, Hello packets may still be sent to "Down" neighbors, although at a reduced frequency.
- **Attempt** - This state is only valid for neighbors attached to NBMA networks. It indicates that no recent information has been received from the neighbor, but that a more concerted effort should be made to contact the neighbor. This is done by sending the neighbor Hello packets at intervals of Hello Interval.
- **Init** - In this state, a Hello packet has recently been seen from the neighbor. However, bidirectional communication has not yet been established with the neighbor (i.e., the router itself did not appear in the neighbor's Hello packet). All neighbors in this state (or greater) are listed in the Hello packets sent from the associated interface.
- **2-Way** - In this state, communication between the two routers is bidirectional. This has been assured by the operation of the Hello Protocol. This is the most advanced state short of beginning adjacency establishment. The (Backup) Designated Router is selected from the set of neighbors in state 2-Way or greater.
- **Exchange Start** - This is the first step in creating an adjacency between the two neighboring routers. The goal of this step is to decide which router is the master, and to decide upon the initial DD sequence number. Neighbor conversations in this state or greater are called adjacencies.
- **Exchange** - In this state the router is describing its entire link state database by sending Database Description packets to the neighbor. In this state, Link State Request Packets may also be sent asking for the neighbor's more recent LSAs. All adjacencies in Exchange state or greater are used by the flooding procedure. These

adjacencies are fully capable of transmitting and receiving all types of OSPF routing protocol packets.

- **Loading** - In this state, Link State Request packets are sent to the neighbor asking for the more recent LSAs that have been discovered (but not yet received) in the Exchange state.
- **Full** - In this state, the neighboring routers are fully adjacent. These adjacencies will now appear in router-LSAs and network-LSAs.

Events - The number of times this neighbor relationship has changed state, or an error has occurred.

Permanence - This variable displays the status of the entry. 'dynamic' and 'permanent' refer to how the neighbor became known.

Hellos Suppressed - This indicates whether Hellos are being suppressed to the neighbor.

Retransmission Queue Length - The current length of the retransmission queue.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

OSPF Neighbor Configuration

Print
 Reload
 Help

Unit/Slot/Port	2/0/10
Neighbor IP Address	192.168.3.1
Router ID	10.1.1.1
Options	2
Router Priority	1
State	Full
Events	5
Permanence	Dynamic
Hellos Suppressed	No
Retransmission Queue Length	0

Refresh

11.2.3.3.9. Viewing OSPF Link State Database

Non-Configurable Data

Router ID - The 32 bit integer in dotted decimal format that uniquely identifies the router within the autonomous system (AS). The Router ID is set on the IP Configuration page. If you want to change the Router ID you must first disable OSPF. After you set the new Router ID, you must re-enable OSPF to have the change take effect. The default value is 0.0.0.0, although this is not a valid Router ID.

Area ID - The ID of an OSPF area to which one of the router interfaces is connected. An Area ID is a 32 bit integer in dotted decimal format that uniquely identifies the area to which an interface is connected.

LSA Type - The format and function of the link state advertisement. One of the following:

- **Router Links**
- **Network Links**
- **Network Summary**
- **ASBR Summary**
- **AS-external**

LS ID - The Link State ID identifies the piece of the routing domain that is being described by the advertisement. The value of the LS ID depends on the advertisement's LS type.

Age - The time since the link state advertisement was first originated, in seconds.

Sequence - The sequence number field is a signed 32-bit integer. It is used to detect old and duplicate link state advertisements. The larger the sequence number, the more recent the advertisement.





Checksum - The checksum is used to detect data corruption of an advertisement. This corruption can occur while an advertisement is being flooded, or while it is being held in a router's memory. This field is the checksum of the complete contents of the advertisement, except the LS age field.

Options - The Options field in the link state advertisement header indicates which optional capabilities are associated with the advertisement. The options are:

- **Q** - This enables support for QoS Traffic Engineering.
- **E** - This describes the way AS-external-LSAs are flooded.
- **MC** - This describes the way IP multicast datagrams are forwarded according to the standard specifications.
- **O** - This describes whether Opaque-LSAs are supported.
- **V** - This describes whether OSPF++ extensions for VPN/COS are supported.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

OSPF Link State Database							
				 Print	 Reload	 Help	
Router ID	Area ID	LSA Type	LS ID	Age	Sequence	Checksum	Options
10.1.1.1	1.1.1.1	Router Links	10.1.1.1	1070	-2147483641	50068	Q -MC O V
10.1.1.2	1.1.1.1	Router Links	10.1.1.2	1071	-2147483646	52110	Q -MC O V
10.1.1.1	1.1.1.1	Network Links	192.168.3.1	1071	-2147483647	14986	Q -MC O V
							

11.2.3.3.10. Configuring OSPF Virtual Link

Selection Criteria

Create New Virtual Link - Select this option from the dropdown menu to define a new virtual link. The area portion of the virtual link identification is fixed: you will be prompted to enter the Neighbor Router ID on a new screen.

Area ID and Neighbor Router ID - Select the virtual link for which you want to display or configure data. It consists of the Area ID and Neighbor Router ID.

Configurable Data

Neighbor Router ID - Enter the neighbor portion of a Virtual Link specification. Virtual links may be configured between any pair of area border routers having interfaces to a common (non-backbone) area. You only enter this ID when you are creating a new virtual link.

Hello Interval - Enter the OSPF hello interval for the specified interface in seconds. This parameter must be the same for all routers attached to a network. Valid values range from 1 to 65,535. The default is 10 seconds. .

Dead Interval - Enter the OSPF dead interval for the specified interface in seconds. This specifies how long a router will wait to see a neighbor router's Hello packets before declaring that the router is down. This parameter must be the same for all routers attached to a network. This value should be a multiple of the Hello Interval (e.g. 4). Valid values range from 1 to 2147483647. The default is 40.

Iftransit Delay Interval - Enter the OSPF Transit Delay for the specified interface. This specifies the estimated number of seconds it takes to transmit a link state update packet over the selected interface. Valid values range from 1 to 3600 seconds (1 hour). The default value is 1 second.

Retransmit Interval - Enter the OSPF retransmit interval for the specified interface. This is the number of seconds between link-state advertisements for adjacencies belonging to this router interface. This value is also used when retransmitting database descriptions and link-state request packets. Valid values range from 1 to 3600 seconds (1 hour). The default is 5 seconds.

Authentication Type - You may select an authentication type other than none by clicking on the 'Configure Authentication' button. You will then see a new screen, where you can select the authentication type from the pulldown menu. The choices are:

- **None** - This is the initial interface state. If you select this option from the pulldown menu on the second screen you will be returned to the first screen.
- **Simple** - If you select 'Simple' you will be prompted to enter an authentication key. This key will be included, in the clear, in the OSPF header of all packets sent on the network. All routers on the network must be configured with the same key.
- **Encrypt** - If you select 'Encrypt' you will be prompted to enter both an authentication key and an authentication ID. Encryption uses the MD5 Message-Digest algorithm. All routers on the network must be configured with the same key and ID.

Authentication Key - Enter the OSPF Authentication Key for the specified interface. If you do not choose to use authentication you will not be prompted to enter a key. If you choose 'simple' authentication you cannot use a key of more than 8 octets. If you choose 'encrypt' the key may be up to 16 octets long. The key value will only be displayed if you are logged on with Read/Write privileges, otherwise it will be displayed as asterisks.

Authentication ID - Enter the ID to be used for authentication. You will only be prompted to enter an ID when you select 'Encrypt' as the authentication type. The ID is a number between 0 and 255, inclusive.

Non-Configurable Data

Down - This is the initial interface state. In this state, the lower-level protocols have indicated that the interface is unusable. In this state, interface parameters will be set to their initial values. All interface timers will be disabled, and there will be no adjacencies associated with the interface.

Waiting - The router is trying to determine the identity of the (Backup) Designated Router by monitoring received Hello Packets. The router is not allowed to elect a Backup Designated Router or a Designated Router until it transitions out of Waiting state. This prevents unnecessary changes of (Backup) Designated Router.

Point-to-Point - The interface is operational, and is connected to the virtual link. On entering this state the router attempts to form an adjacency with the neighboring router. Hello Packets are sent to the neighbor every HelloInterval seconds.

Designated Router - This router is itself the Designated Router on the attached network. Adjacencies are established to all other routers attached to the network. The router must also originate a network-LSA for the network node. The network- LSA will contain links to all routers (including the Designated Router itself) attached to the network.

Backup Designated Router - This router is itself the Backup Designated Router on the attached network. It will be promoted to Designated Router if the present Designated Router fails. The router establishes adjacencies to all other routers attached to the network. The Backup Designated Router performs slightly different functions during the Flooding Procedure, as compared to the Designated Router.

Other Designated Router - The interface is connected to a broadcast or NBMA network on which other routers have been selected to be the Designated Router and Backup Designated Router. The router attempts to form adjacencies to both the Designated Router and the Backup Designated Router.

Neighbor State - The state of the Virtual Neighbor Relationship.

Command Buttons

Configure Authentication - Display a new screen where you can select the authentication method for the virtual link.

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Delete - Removes the specified virtual link from the router configuration.

OSPF Virtual Link Configuration Print Reload Help

Virtual Link (Area ID - Neighbor Router ID)

Create New Virtual Link

Area ID

1.1.1.1

Neighbor Router ID

Submit

Virtual Link (Area ID - Neighbor Router ID)

1.1.1.1 - 10.1.1.1

Hello Interval (secs)

10

(1 to 65535)

Dead Interval (secs)

40

(1 to 2147483647)

Iftransit Delay Interval (secs)

1

(0 to 3600)

State

Down

Neighbor State

Down

Retransmit Interval (secs)

5

(0 to 3600)

Authentication Type

None

Configure Authentication

Delete

Submit

11.2.3.3.11. Viewing OSPF Virtual Link Summary Table

Non-Configurable Data

Area ID - The Area ID portion of the virtual link identification for which data is to be displayed. The Area ID and Neighbor Router ID together define a virtual link.

Neighbor Router ID - The neighbor portion of the virtual link identification. Virtual links may be configured between any pair of area border routers having interfaces to a common (non-backbone) area.

Hello Interval - The OSPF hello interval for the virtual link in units of seconds. The value for hello interval must be the same for all routers attached to a network.




Dead Interval - The OSPF dead interval for the virtual link in units of seconds. This specifies how long a router will wait to see a neighbor router's Hello packets before declaring that the router is down. This parameter must be the same for all routers attached to a common network, and should be a multiple of the Hello Interval (i.e. 4).

Retransmit Interval - The OSPF retransmit interval for the virtual link in units of seconds. This specifies the time between link-state advertisements for adjacencies belonging to this router interface. This value is also used when retransmitting database descriptions and link-state request packets.

Iftransit Delay Interval - The OSPF Transit Delay for the virtual link in units of seconds. It specifies the estimated number of seconds it takes to transmit a link state update packet over this interface.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

OSPF Virtual Link Summary					
			 Print  Reload  Help		
Area ID	Neighbor Router ID	Hello Interval (secs)	Dead Interval (secs)	Retransmit Interval (secs)	Iftransit Delay Interval (secs)
1.1.1.1	10.1.1.1	10	40	5	1
<div>Refresh</div>					

11.2.3.3.12. Configuring OSPF Route Redistribution

This screen can be used to configure the OSPF Route Redistribution parameters. The allowable values for each fields are displayed next to the field. If any invalid values are entered, an alert message will be displayed with the list of all the valid values.

Configurable Data

Configured Source - This select box is a dynamic selector and would be populated by only those Source Routes that have already been configured for redistribute by OSPF. However, the topmost option in the select box would be "Create", and this allows the user to configure another, among the Available Source Routes. The valid values are 'Static', 'Connected', 'RIP', 'BGP' and 'Create'.

Available Source - This select box is a dynamic selector and would be populated by only those Source Routes that have not previously been configured for redistribution by OSPF. This select box would appear only if the user selects "Create" option as Configured Source. The valid values are 'Static', 'Connected', 'RIP' and 'BGP'.

Metric - Sets the metric value to be used as the metric of redistributed routes. This field displays the metric if the source was pre-configured and can be modified. The valid values are (0 to 16777215)

Metric Type - Sets the OSPF metric type of redistributed routes.

Tag - Sets the tag field in routes redistributed. This field displays the tag if the source was pre-configured, otherwise 0 and can be modified. The valid values are 0 to 4294967295.

Subnets - Sets whether the subnetted routes should be redistributed or not.

Distribute List - Sets the Access List that filters the routes to be redistributed by the destination protocol. Only permitted routes are redistributed. If this command refers to a non-existent access list, all routes are permitted. The valid values for Access List IDs are (1 to 199). When used for route filtering, the only fields in an access list that get used are

- **Source IP Address and netmask**
- **Destination IP Address and netmask**
- **Action (permit or deny)**

All other fields (source and destination port, precedence, tos, etc.) are ignored.




The source IP address is compared to the destination IP address of the route. The source IP netmask in the access list rule is treated as a wildcard mask, indicating which bits in the source IP address must match the destination address of the route. (Note that a 1 in the mask indicates a "don't care" in the corresponding address bit.)

When an access list rule includes a destination IP address and netmask (an extended access list), the destination IP address is compared to the network mask of the destination of the route. The destination netmask in the access list serves as a wildcard mask, indicating which bits in the route's destination mask are significant for the filtering operation.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately.

Delete - Delete the entry of the Source Route selected as Configured Source from the list of Sources configured for OSPF Route Redistribution.

OSPF Route Redistribution Configuration  **Print**  **Reload**  **Help**

Configured Source	<input type="button" value="Create"/>
Available Source	<input type="button" value=""/>
Metric	<input type="text" value=""/> (0 to 16777215)
Metric Type	<input type="button" value="External Type 2"/>
Tag	<input type="text" value=""/> (0 to 4294967295)
Subnets	<input type="button" value="Disable"/>
Distribute List	<input type="text" value=""/> (1 to 199)
<input type="button" value="Submit"/>	

11.2.3.3.13. Viewing OSPF Route Redistribution Summary Information

This screen displays the OSPF Route Redistribution Configurations.

Non Configurable Data

Source - The Source Route to be Redistributed by OSPF.

Metric- The Metric of redistributed routes for the given Source Route. Display "Unconfigured" when not configured.

Metric Type - The OSPF metric types of redistributed routes.




Tag - The tag field in routes redistributed. This field displays the tag if the source was pre-configured, otherwise 0 and can be modified. The valid values are 0 to 4294967295.

Subnets - Whether the subnetted routes should be redistributed or not.

Distribute List - The Access List that filters the routes to be redistributed by the Destination Protocol. Display 0 when not configured.

Command Buttons

Refresh - Displays the latest OSPF Route Redistribution Configuration data.

OSPF Route Redistribution Summary					
			 Print	 Reload	 Help
Source	Metric	Metric Type	Tag	Subnets	Distribute List
Connected	2	External Type 2	2	Disable	2
<input type="button" value="Refresh"/>					

11.2.3.4 Managing BOOTP/DHCP Relay Agent

11.2.3.4.1. Configuring BOOTP/DHCP Relay Agent

Configurable Data

Maximum Hop Count - Enter the maximum number of hops a client request can take before being discarded.

Server IP Address - Enter either the IP address of the BOOTP/DHCP server or the IP address of the next BOOTP/DHCP Relay Agent.

Admin Mode - Select enable or disable from the pulldown menu. When you select 'enable' BOOTP/DHCP requests will be forwarded to the IP address you entered in the 'Server IP address' field.

Minimum Wait Time - Enter a time in seconds. This value will be compared to the time stamp in the client's request packets, which should represent the time since the client was powered up. Packets will only be forwarded when the time stamp exceeds the minimum wait time.

Circuit Id Option Mode - Select enable or disable from the pulldown menu. If you select 'enable' Relay Agent options will be added to requests before they are forwarded to the server and removed from replies before they are forwarded to clients.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

The screenshot shows a web interface titled "BOOTP/DHCP Relay Agent Configuration" in red text. At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". The main configuration area has a light gray background and contains five rows of settings:

- Maximum Hop Count:** A text input field containing the number "4", followed by the range "(1 to 16)".
- Server IP Address:** A text input field containing "0.0.0.0".
- Admin Mode:** A dropdown menu currently showing "Disable".
- Minimum Wait Time (secs):** A text input field containing "0", followed by the range "(0 to 100)".
- Circuit ID Option Mode:** A dropdown menu currently showing "Disable".

At the bottom center of the configuration area is a "Submit" button.

11.2.3.4.2. Viewing BOOTP/DHCP Relay Agent Status

Non-Configurable Data

Maximum Hop Count - The maximum number of Hops a client request can go without being discarded.

Server IP Address - IP address of the BOOTP/DHCP server or the IP address of the next BOOTP/DHCP Relay Agent.

Admin Mode - Administrative mode of the relay. When you select 'enable' BOOTP/DHCP requests will be forwarded to the IP address you entered in the 'Server IP address' field.

Minimum Wait Time - The Minimum time in seconds. This value will be compared to the time stamp in the client's request packets, which should represent the time since the

client was powered up. Packets will only be forwarded when the time stamp exceeds the minimum wait time.

Circuit Id Option Mode - This is the Relay agent option which can be either enabled or disabled. When enabled Relay Agent options will be added to requests before they are forwarded to the server and removed from replies before they are forwarded to clients.

Requests Received - The total number of BOOTP/DHCP requests received from all clients since the last time the switch was reset.

Requests Relayed - The total number of BOOTP/DHCP requests forwarded to the server since the last time the switch was reset.

Packets Discarded - The total number of BOOTP/DHCP packets discarded by this Relay Agent since the last time the switch was reset.

BOOTP/DHCP Relay Agent Status		Print	Reload	Help
Maximum Hop Count	4			
Server IP Address	0.0.0.0			
Admin Mode	Disable			
Minimum Wait Time (secs)	0			
Circuit ID Option Mode	Disable			
Requests Received	0			
Requests Relayed	0			
Packets Discarded	0			

11.2.3.5 Managing DNS Relay

11.2.3.5.1. Configuring DNS Relay

The DNS protocol controls the Domain Name System (DNS), a distributed database with which you can map host names to IP addresses. When you configure DNS on your switch, you can substitute the host name for the IP address with all IP commands, such as ping, telnet, traceroute, and related Telnet support operations. To keep track of domain names, IP has defined the concept of a domain name server, which holds a cache (or database) of names mapped to IP addresses. To map domain names to IP addresses, you must first identify the host names, specify the name server that is present on your network, and enable the DNS.


Configurable Data

Admin Mode - Select enable or disable from the pull down menu. When you select 'enable', the IP Domain Naming System (DNS)-based host name-to-address translation will be enabled.

Default Domain Name - Default domain name used to complete unqualified host names. Do not include the initial period that separates an unqualified name from the domain name. This is a text string of up to 64 characters.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed

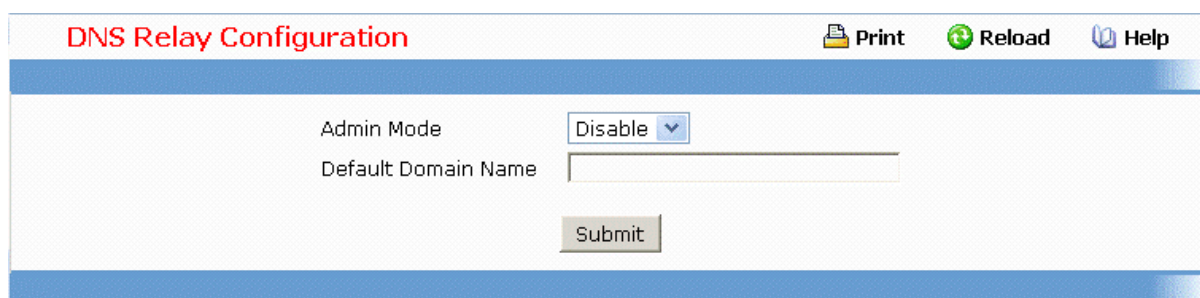

The screenshot shows a web interface titled "DNS Relay Configuration" in red text. At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". Below the title bar, there is a form with two fields: "Admin Mode" with a dropdown menu currently set to "Disable", and "Default Domain Name" with an empty text input box. A "Submit" button is located below the "Default Domain Name" field.

11.2.3.5.2. Configuring Domain Name

You can use this panel to change the configuration parameters for the domain names that can be appended to incomplete host names (i.e., host names passed from a client that are not formatted with dotted notation). You can also use this screen to display the contents of the table.

Configurable Data

Domain - Specifies all the existing domain names along with an additional option "Create". When the user selects "Create" another text box "Domain Name" appears where the user may enter domain name to be configured.

Domain Name - Specifies the domain name. Do not include the initial period that separates an unqualified name from the domain name. This is a text string of up to 64 characters.

Command Buttons

Submit - Sends the updated configuration to the switch. Configuration changes take effect immediately.

Delete - Deletes the domain name entry. Sends the updated configuration to the switch. Configuration changes take effect immediately.

Delete All - Deletes all the domain name entries. Sends the updated configuration to the switch. Configuration changes take effect immediately.

The screenshot shows a web interface titled "Domain Name Configuration" in red text. At the top right, there are three icons: a printer icon labeled "Print", a green circular arrow icon labeled "Reload", and a book icon labeled "Help". Below the title bar, there is a "Domain" label next to a dropdown menu currently showing "Create". Below that is a "Domain Name" label next to an empty text input field. At the bottom of the form area, there are two buttons: "Submit" and "Delete All".

11.2.3.5.3. Configuring Name Server

You can use this panel to change the configuration parameters for the domain name servers. You can also use this screen to display the contents of the table.

Configurable Data

Name Server - Specifies all the existing domain name servers along with an additional option "Create". When the user selects "Create" another text box "IP Address" appears where the user may enter domain name server to be configured.

IP Address - Specifies the address of the domain name server. This is a text string of up to 64 characters containing the encoded unicast IP address of a domain name server.

Non-Configurable Data

Request - Specifies the number of DNS requests since last time agent reboot.

Response - Specifies the number of DNS Server responses since last time agent reboot.

Command Buttons

Submit - Sends the updated configuration to the switch. Configuration changes take effect immediately.

Delete - Deletes the domain name server entry. Sends the updated configuration to the switch. Configuration changes take effect immediately.

The screenshot shows a web interface titled "Name Server Configuration" in red text. At the top right, there are three icons: a printer icon labeled "Print", a green circular arrow icon labeled "Reload", and a book icon labeled "Help". Below the title bar, there is a "Name Server" label next to a dropdown menu currently showing "Create". Below that is an "IP Address" label next to a text input field containing "0.0.0.0". At the bottom of the form area, there are two buttons: "Submit" and "Delete All".

11.2.3.5.4. Viewing DNS Cache Summary Information

The Domain Name System (DNS) dynamically maps domain name to Internet (IP) addresses. This panel displays the current contents of the DNS cache.

Non-Configurable Data

Domain Name List - The domain name associated with this record.

IP address - The IP address associated with this record.


TTL - The time to live reported by the name server.

Flag - The flag of the record.

Command Buttons

Refresh - Refresh the page with the latest DNS cache entries.

Clear All - Clear all entries in the DNS cache.

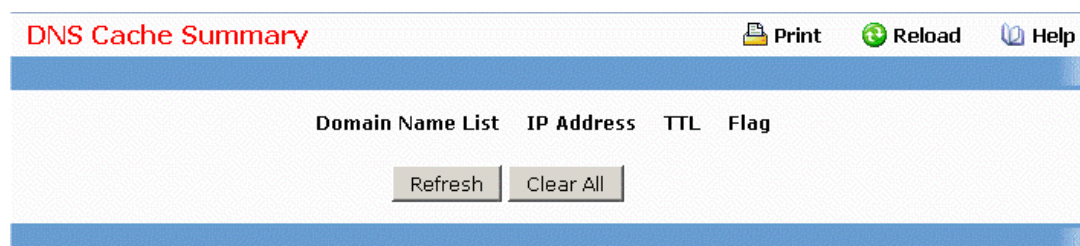

11.2.3.5.5. Configuring DNS Host

You can use this screen to change the configuration parameters for the static entry in the DNS table. You can also use this screen to display the contents of the table.

Configurable Data

Domain - Specifies all the existing hosts along with an additional option "Create". When the user selects "Create" another text box "Domain Name" appears where the user may enter host to be configured.

Domain Name - Specifies the domain name of the host. This is a text string of up to 64 characters.

IP Address - Specifies the address of the host. This is a text string of up to 64 characters containing the encoded unicast IP address of a host.

Command Buttons

Submit - Sends the updated configuration to the switch. Configuration changes take effect immediately.

Delete - Deletes the host entry. Sends the updated configuration to the switch. Configuration changes take effect immediately.

Delete All - Deletes all the host entries. Sends the updated configuration to the switch. Configuration changes take effect immediately.

The screenshot shows a web interface titled "Hosts Configuration" in red text. At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". Below the title bar, there is a form with three input fields: "Domain" with a dropdown menu showing "Create", "Domain Name" with a text input field, and "IP Address" with a text input field containing "0.0.0.0". At the bottom of the form, there are two buttons: "Submit" and "Delete All".

11.2.3.6 Managing Routing Information Protocol (RIP)

11.2.3.6.1. Configuring RIP Global Configuration Page

Configurable Data

RIP Admin Mode - Select enable or disable from the pulldown menu. If you select enable RIP will be enabled for the switch. The default is disabled.

Split Horizon Mode - Select none, simple or poison reverse from the pulldown menu. Split horizon is a technique for avoiding problems caused by including routes in updates sent to the router from which the route was originally learned. The options are:

None - no special processing for this case.

Simple - a route will not be included in updates sent to the router from which it was learned.

Poisoned reverse - a route will be included in updates sent to the router from which it was learned, but the metric will be set to infinity.

The default is simple.

Auto Summary Mode - Select enable or disable from the pulldown menu. If you select enable groups of adjacent routes will be summarized into single entries, in order to reduce the total number of entries. The default is disabled.

Host Routes Select Mode - Select enable or disable from the pulldown menu. If you select enable the router will be accept host routes. The default is enabled.

Default Information Originate - Enable or Disable Default Route Advertise.

Default Metric - Sets a default for the metric of redistributed routes. This field displays the default metric if one has already been set or blank if not configured earlier. The valid values are (1 to 15)

Non-Configurable Data

Global Route Changes - The number of route changes made to the IP Route Database by RIP. This does not include the refresh of a route's age.

Global queries - The number of responses sent to RIP queries from other systems.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

11.2.3.6.2. Viewing Each Routing Interface's RIP Configuration Page

Non-Configurable Data

Unit/Slot/Port - The slot and port for which the information is being displayed.

IP Address - The IP Address of the router interface.

Send Version - The RIP version to which RIP control packets sent from the interface conform. The value is one of the following:

RIP-1 - RIP version 1 packets will be sent using broadcast.

RIP-1c - RIP version 1 compatibility mode. RIP version 2 formatted packets will be transmitted using broadcast.

RIP-2 - RIP version 2 packets will be sent using multicast.

None - RIP control packets will not be transmitted.

The default is RIP-2.

Receive Version - Which RIP version control packets will be accepted by the interface. The value is one of the following:

RIP-1 - only RIP version 1 formatted packets will be received.

RIP-2 - only RIP version 2 formatted packets will be received.

Both - packets will be received in either format.

None - no RIP control packets will be received.

The default is Both.

RIP Admin Mode - Whether RIP is enabled or disabled on the interface.

Link State - Whether the RIP interface is up or down.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

RIP Interface Summary						Print	Reload	Help
Unit/Slot/Port	IP Address	Send Version	Receive Version	RIP Admin Mode	Link State			
1/0/20	192.168.6.160	RIP-2	Both	Enable	Link Up			
0/2/1	192.168.8.160	RIP-2	Both	Enable	Link Up			
0/2/2	192.168.5.160	RIP-2	Both	Enable	Link Up			
						Refresh		

11.2.3.6.3. Defining The Routing Interface's RIP Configuration Page

Selection Criteria

Unit/Slot/Port - Select the interface for which data is to be configured.

Configurable Data

Send Version - Select the version of RIP control packets the interface should send from the pulldown menu. The value is one of the following:

RIP-1 - send RIP version 1 formatted packets via broadcast.

RIP-1c - RIP version 1 compatibility mode. Send RIP version 2 formatted packets via broadcast.

RIP-2 - send RIP version 2 packets using multicast.

None - no RIP control packets will be sent.

The default is RIP-2.

Receive Version - Select what RIP control packets the interface will accept from the pulldown menu. The value is one of the following:

RIP-1 - accept only RIP version 1 formatted packets.

RIP-2 - accept only RIP version 2 formatted packets.

Both - accept packets in either format.

None - no RIP control packets will be accepted.

The default is Both.

RIP Admin Mode - Select enable or disable from the pulldown menu. Before you enable

RIP version 1 or version 1c on an interface, you must first enable network directed broadcast mode on the corresponding interface. The default value is disabled.

Authentication Type - You may select an authentication type other than none by clicking on the 'Configure Authentication' button. You will then see a new screen, where you can select the authentication type from the pulldown menu. The choices are:

None - This is the initial interface state. If you select this option from the pulldown menu on the second screen you will be returned to the first screen and no authentication protocols will be run.

Simple - If you select 'Simple' you will be prompted to enter an authentication key. This key will be included, in the clear, in the OSPF header of all packets sent on the network. All routers on the network must be configured with the same key.

Encrypt - If you select 'Encrypt' you will be prompted to enter both an authentication key and an authentication ID. Encryption uses the MD5 Message-Digest algorithm. All routers on the network must be configured with the same key and ID.

Authentication Key - Enter the OSPF Authentication Key for the specified interface. If you do not choose to use authentication you will not be prompted to enter a key. If you choose 'simple' or 'encrypt' the key may be up to 16 octets long. The key value will only be displayed if you are logged on with Read/Write privileges, otherwise it will be displayed as asterisks.

Non-Configurable Data

IP Address - The IP Address of the router interface.

Link State - Indicates whether the RIP interface is up or down.

Bad Packets Received - The number of RIP response packets received by the RIP process which were subsequently discarded for any reason.

Bad Routes Received - The number of routes, in valid RIP packets, which were ignored for any reason (e.g. unknown address family, or invalid metric).

Updates Sent - The number of triggered RIP updates actually sent on this interface. This explicitly does NOT include full updates sent containing new information.

Command Buttons

Configure Authentication - Display a new screen where you can select the authentication method for the virtual link.

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed

Unit/Slot/Port	0/2/2
Send Version	RIP-2
Receive Version	Both
RIP Admin Mode	Enable
Authentication Type	MD5
Authentication Key	hello
Authentication Key ID	2
IP Address	192.168.5.160
Link State	Link Up
Bad Packets Received	0
Bad Routes Received	10
Updates Sent	593

11.2.3.6.4. Configuring Route Redistribution Configuration

This screen can be used to configure the RIP Route Redistribution parameters. The allowable values for each field are displayed next to the field. If any invalid values are entered, an alert message will be displayed with the list of all the valid values.

Configurable Data

Configured Source - This select box is a dynamic selector and would be populated by only those Source Routes that have already been configured for redistribute by RIP. However, the topmost option in the select box would be "Create", and this allows the user to configure another, among the Available Source Routes. The valid values are 'Static', 'Connected', 'OSPF' and 'Create'.

Available Source - This select box is a dynamic selector and would be populated by only those Source Routes that have not previously been configured for redistribution by RIP. This select box would appear only if the user selects "Create" option as Configured Source. The valid values are 'Static', 'Connected', and 'OSPF'.

Metric- Sets the metric value to be used as the metric of redistributed routes. This field displays the metric if the source was pre-configured and can be modified. The valid values are (1 to 15)

Match - One or more of these checkboxes must be selected to set the type of OSPF routes to be redistributed. This field would appear only if Source is "OSPF". This field displays the configured match options if "OSPF" was pre-configured and can be modified.

Internal - Sets Internal OSPF Routes to be redistributed

External 1 - Sets External Type 1 OSPF Routes to be redistributed

External 2 - Sets External Type 2 OSPF Routes to be redistributed

NSSA-External 1 - Sets NSSA External Type 1 OSPF Routes to be redistributed

NSSA-External 2 - Sets NSSA External Type 2 OSPF Routes to be redistributed

The default is Internal.

Distribute List - Distribute List - Sets the Access List that filters the routes to be redistributed by the destination protocol. Only permitted routes are redistributed. If this command refers to a non-existent access list, all routes are permitted. The valid values for Access List IDs are (1 to 199). When used for route filtering, the only fields in an access list that get used are

Source IP Address and netmask

Destination IP Address and netmask

Action (permit or deny)

All other fields (source and destination port, precedence, tos, etc.) are ignored.

The source IP address is compared to the destination IP address of the route. The source IP netmask in the access list rule is treated as a wildcard mask, indicating which bits in the source IP address must match the destination address of the route. (Note that a 1 in the mask indicates a "don't care" in the corresponding address bit.)

When an access list rule includes a destination IP address and netmask (an extended access list), the destination IP address is compared to the network mask of the destination of the route. The destination netmask in the access list serves as a wildcard mask, indicating which bits in the route's destination mask are significant for the filtering operation.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately.

Delete - Delete the entry of the Source Route selected as Configured Source from the list of Sources configured for RIP Route Redistribution.

RIP Route Redistribution ConfigurationPrintReloadHelp

Configured Source	Create
Available Source	OSPF
Metric	1 (1 to 15)
Match *	<input checked="" type="checkbox"/> Internal Routes <input type="checkbox"/> External Type 1 Routes <input type="checkbox"/> External Type 2 Routes <input type="checkbox"/> NSSA External Type 1 Routes <input type="checkbox"/> NSSA External Type 2 Routes
Distribute List	2 (1 to 199)

Submit

*One or more of these checkboxes must be selected

RIP Route Redistribution Configuration

 Print
 Reload
 Help

Configured Source

Metric

Match *

Distribute List

OSPF

1 (1 to 15)

☒ Internal Routes

☐ External Type 1 Routes

☐ External Type 2 Routes

☐ NSSA External Type 1 Routes

☐ NSSA External Type 2 Routes

2 (1 to 199)

Delete

Submit

*One or more of these checkboxes must be selected

11.2.3.6.5. Viewing Route Redistribution Configuration

This screen displays the RIP Route Redistribution Configurations.

Non Configurable Data

Source - The Source Route to be Redistributed by RIP.

Metric- The Metric of redistributed routes for the given Source Route. Displays "Unconfigured" when not configured.

Match - List of Routes redistributed when "OSPF" is selected as Source. The list may include one or more of:

Internal

External 1

External 2

NSSA-External 1

NSSA-External 2

Distribute List - The Access List that filters the routes to be redistributed by the Destination Protocol. Displays 0 when not configured.

Command Buttons

Refresh - Displays the latest RIP Route Redistribution Configuration data.

RIP Route Redistribution Summary

 Print
 Reload
 Help

Source	Metric	Match	Distribute List
Static	1	N.A.	1
OSPF	1	Internal	2

Refresh

Stackable Layer 3 Managed Ethernet Switch User Manual

Page: 568/661

11.2.3.7 Managing Router Discovery

11.2.3.7.1. Configuring Router Discovery

Selection Criteria

Unit/Slot/Port - Select the router interface for which data is to be configured.

Configurable Data

Advertise Mode - Select enable or disable from the pulldown menu. If you select enable, Router Advertisements will be transmitted from the selected interface.

Advertise Address - Enter the IP Address to be used to advertise the router.

Maximum Advertise Interval - Enter the maximum time (in seconds) allowed between router advertisements sent from the interface.

Minimum Advertise Interval - Enter the minimum time (in seconds) allowed between router advertisements sent from the interface.

Advertise Lifetime - Enter the value (in seconds) to be used as the lifetime field in router advertisements sent from the interface. This is the maximum length of time that the advertised addresses are to be considered as valid router addresses by hosts.

Preference Level - Specify the preference level of the router as a default router relative to other routers on the same subnet. Higher numbered addresses are preferred. You must enter an integer.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. The changes will not be retained across a power cycle unless a save is performed.

Router Discovery ConfigurationPrintReloadHelp

Unit/Slot/Port	<input type="text" value="1/0/1"/>
Advertise Mode	<input type="text" value="Disable"/>
Advertise Address	<input type="text" value="224.0.0.1"/>
Maximum Advertise Interval (secs)	<input type="text" value="600"/> (450 to 1800)
Minimum Advertise Interval (secs)	<input type="text" value="450"/> (3 to 600)
Advertise Lifetime (secs)	<input type="text" value="1800"/> (600 to 9000)
Preference Level	<input type="text" value="0"/> (-2147483648 to 2147483647)
<input type="button" value="Submit"/>	

11.2.3.7.2. Viewing Router Discovery Status

Non-Configurable Data

Unit/Slot/Port - The router interface for which data is displayed.

Advertise Mode - The values are enable or disable. Enable denotes that Router Discovery is enabled on that interface.

Advertise Address - The IP Address used to advertise the router.

Maximum Advertise Interval - The maximum time (in seconds) allowed between router advertisements sent from the interface.

Minimum Advertise Interval - The minimum time (in seconds) allowed between router advertisements sent from the interface.

Advertise Lifetime - The value (in seconds) used as the lifetime field in router advertisements sent from the interface. This is the maximum length of time that the advertised addresses are to be considered as valid router addresses by hosts.

Preference Level - The preference level of the router as a default router relative to other routers on the same subnet. Higher numbered addresses are preferred.

Router Discovery Status							Print	Reload	Help
Unit/Slot/Port	Advertise Mode	Advertise Address	Maximum Advertise Interval (secs)	Minimum Advertise Interval (secs)	Advertise Lifetime (secs)	Preference Level			
1/0/1	Disable	224.0.0.1	600	450	1800	0			
1/0/2	Disable	224.0.0.1	600	450	1800	0			
1/0/3	Disable	224.0.0.1	600	450	1800	0			
1/0/4	Disable	224.0.0.1	600	450	1800	0			
1/0/5	Disable	224.0.0.1	600	450	1800	0			
1/0/6	Disable	224.0.0.1	600	450	1800	0			
1/0/7	Disable	224.0.0.1	600	450	1800	0			
1/0/8	Disable	224.0.0.1	600	450	1800	0			
1/0/9	Disable	224.0.0.1	600	450	1800	0			
1/0/10	Disable	224.0.0.1	600	450	1800	0			
1/0/11	Disable	224.0.0.1	600	450	1800	0			
1/0/12	Disable	224.0.0.1	600	450	1800	0			
1/0/13	Disable	224.0.0.1	600	450	1800	0			
1/0/14	Disable	224.0.0.1	600	450	1800	0			
1/0/15	Disable	224.0.0.1	600	450	1800	0			

11.2.3.8 Managing Route Table

11.2.3.8.1. Viewing Router Route Table

Non-Configurable Data

Network Address - The IP route prefix for the destination.

Subnet Mask - Also referred to as the subnet/network mask, this indicates the portion of the IP interface address that identifies the attached network.

Protocol - This field tells which protocol created the specified route. The possibilities are one of the following:

- **Local**
- **Static**
- **Default**
- **MPLS**
- **OSPF Intra**
- **OSPF Inter**
- **OSPF Type-1**
- **OSPF Type-2**
- **RIP**
- **BGP4**

Next Hop Unit/Slot/Port - The outgoing router interface to use when forwarding traffic to the destination.


Next Hop IP Address - The outgoing router IP address to use when forwarding traffic to the next router (if any) in the path towards the destination. The next router will always be one of the adjacent neighbors or the IP address of the local interface for a directly attached network.


Total Number of Routes - The total number of routes in the route table.


Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Router Route Table

 Print

 Reload

 Help

Total Number of Routes

1

Network Address	Subnet Mask	Protocol	Next Hop Unit/Slot/Port	Next Hop IP Address
192.168.3.0	255.255.255.0	Local	1/0/10	192.168.3.1

Refresh

11.2.3.8.2. Viewing Router Best Route Table

Non-Configurable Data

Network Address - The IP route prefix for the destination.

Subnet Mask - Also referred to as the subnet/network mask, this indicates the portion of the IP interface address that identifies the attached network.

Protocol - This field tells which protocol created the specified route. The possibilities are one of the following:

- **Local**
- **Static**
- **Default**
- **MPLS**
- **OSPF Intra**
- **OSPF Inter**
- **OSPF Type-1**
- **OSPF Type-2**
- **RIP**
- **BGP4**

Next Hop Unit/Slot/Port - The outgoing router interface to use when forwarding traffic to the destination.

Next Hop IP Address - The outgoing router IP address to use when forwarding traffic to


the next router (if any) in the path towards the destination. The next router will always be one of the adjacent neighbors or the IP address of the local interface for a directly attached network.

Total Number of Routes - The total number of routes in the route table.


Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Router Best Routes Table

 Print

 Reload

 Help

Total Number of Routes1

Network Address	Subnet Mask	Protocol	Next Hop Unit/Slot/Port	Next Hop IP Address
192.168.3.0	255.255.255.0	Local	1/0/10	192.168.3.1

Refresh

11.2.3.8.3. Configuring Router Static Route Entry

Selection Criteria

Network Address - Specifies the IP route prefix for the destination. In order to create a route a valid routing interface must exist and the next hop IP Address must be on the same network as the routing interface. Routing interfaces are created on the IP Interface Configuration page. Valid next hop IP Addresses can be viewed on the 'Route Table' screen.

Route Type - This field can be either default or static. If creating a default route, all that needs to be specified is the next hop IP address, otherwise each field needs to be specified.

Non-Configurable Data

Subnet Mask - Also referred to as the subnet/network mask, this indicates the portion of the IP interface address that identifies the attached network.

Protocol - This field tells which protocol created the specified route. The possibilities are one of the following:

- **Static**
- **Default**
- **MPLS**
- **OSPF Intra**
- **OSPF Inter**
- **OSPF Type-1**
- **OSPF Type-2**
- **RIP**

▪ **BGP4Local**


Next Hop Unit/Slot/Port - The outgoing router interface to use when forwarding traffic to the destination.

Next Hop IP Address - The outgoing router IP address to use when forwarding traffic to the next router (if any) in the path towards the destination. The next router will always be one of the adjacent neighbors or the IP address of the local interface for a directly attached network. When creating a route, the next hop IP must be on the same network as the routing interface. Valid next hop IP Addresses can be seen on the 'Route Table' page.

Metric - Administrative cost of the path to the destination. If no value is entered, default is 1. The range is 0 - 255.

Command Buttons

Add Route - Go to a separate page where a route can be created.

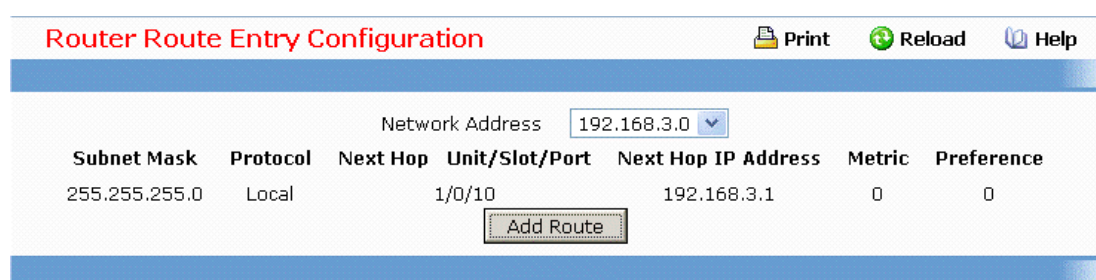

The screenshot shows the 'Router Route Entry Configuration' interface. At the top, there are buttons for 'Print', 'Reload', and 'Help'. Below these, a 'Network Address' dropdown menu is set to '192.168.3.0'. A table displays the configuration details:

Subnet Mask	Protocol	Next Hop	Unit/Slot/Port	Next Hop IP Address	Metric	Preference
255.255.255.0	Local		1/0/10	192.168.3.1	0	0

Below the table is an 'Add Route' button.

11.2.3.8.4. Configuring Router Static Route Entry

Selection Criteria

Route Type - This field can be either default or static. If creating a default route, all that needs to be specified is the next hop IP address, otherwise each field needs to be specified.

Non-Configurable Data

Network Address - The IP route prefix for the destination.

Subnet Mask - Also referred to as the subnet/network mask, this indicates the portion of the IP interface address that identifies the attached network.

Next Hop IP Address - The outgoing router IP address to use when forwarding traffic to the next router (if any) in the path towards the destination. The next router will always be one of the adjacent neighbors or the IP address of the local interface for a directly attached network.

Preference - Specifies a preference value for the configured next hop.

Command Buttons

Add Route - Go to a separate page where a route can be created.

Network Address	Subnet Mask	Next Hop IP	Preference
-----------------	-------------	-------------	------------

[Add Route](#)

11.2.3.8.5. Configuring Router Route Preference

Use this panel to configure the default preference for each protocol (e.g. 60 for static routes, 170 for BGP). These values are arbitrary values in the range of 1 to 255 and are independent of route metrics. Most routing protocols use a route metric to determine the shortest path known to the protocol, independent of any other protocol.

The best route to a destination is chosen by selecting the route with the lowest preference value. When there are multiple routes to a destination, the preference values are used to determine the preferred route. If there is still a tie, the route with the best route metric will be chosen. To avoid problems with mismatched metrics (i.e. RIP and OSPF metrics are not directly comparable) you must configure different preference values for each of the protocols.

Configurable Data

Static - The static route preference value in the router. The default value is 1. The range is 1 to 255.

OSPF Intra - The OSPF intra route preference value in the router. The default value is 8. The range is 1 to 255. The OSPF specification (RFC 2328) requires that preferences must be given to the routes learned via OSPF in the following order: intra < inter < type-1 < type-2.

OSPF Inter - The OSPF inter route preference value in the router. The default value is 10. The range is 1 to 255. The OSPF specification (RFC 2328) requires that preferences must be given to the routes learned via OSPF in the following order: intra < inter < type-1 < type-2.

OSPF Type-1 - The OSPF type-1 route preference value in the router. The default value is 13. The range is 1 to 255. The OSPF specification (RFC 2328) requires that preferences must be given to the routes learned via OSPF in the following order: intra < inter < type-1 < type-2.

OSPF Type-2 - The OSPF type-2 route preference value in the router. The default value is 150. The range is 1 to 255. The OSPF specification (RFC 2328) requires that preferences must be given to the routes learned via OSPF in the following order: intra < inter < type-1 < type-2.

RIP - The RIP route preference value in the router. The default value is 15. The range is 1 to 255.

Non-Configurable Data

Local - This field displays the local route preference value.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

The screenshot shows a web interface titled "Router Route Preferences Configuration". At the top right, there are three buttons: "Print", "Reload", and "Help". The main content area contains a table of route preference values:

Local	0	
Static	<input type="text" value="1"/>	(1 to 255)
OSPF Intra	<input type="text" value="8"/>	(1 to 255)
OSPF Inter	<input type="text" value="10"/>	(1 to 255)
OSPF Type-1	<input type="text" value="13"/>	(1 to 255)
OSPF Type-2	<input type="text" value="150"/>	(1 to 255)
RIP	<input type="text" value="15"/>	(1 to 255)

At the bottom center of the form is a "Submit" button.

11.2.3.9 Managing VLAN Routing

11.2.3.9.1. Configuring VLAN Routing

Selection Criteria

VLAN ID - Enter the ID of a VLAN you want to configure for VLAN Routing. Initially, the field will display the ID of the first VLAN. After you enter a new VLAN ID and click on the Create button the non-configurable data will be displayed. See below for detailed instructions on how to use that data to complete the configuration of the VLAN.

Non-Configurable Data

Unit/Slot/Port - The interface assigned to the VLAN for routing.

MAC Address - The MAC Address assigned to the VLAN Routing Interface

Command Buttons

Create - Send the updated configuration to the switch. Configuration changes take effect

immediately. These changes will not be retained across a power cycle unless a save is performed.

Delete - Remove the VLAN Routing Interface specified in the *VLAN ID input field* from the router configuration.

Instructions for creating a VLAN

- Enter a new VLAN ID in the field labeled VLAN ID.
- Click on the Create button. The page will be updated to display the interface and MAC address assigned to this new VLAN. The IP address and Subnet Mask fields will be 0.0.0.0.
- Note the interface assigned to the VLAN.
- Use the index pane to change to the IP Interface Configuration page.
- Select the interface assigned to the VLAN. The IP address and Subnet Mask fields will be 0.0.0.0.
- Enter the IP address and subnet mask for the VLAN.
- Select the Submit button.
- Change back to the VLAN Routing Summary page. The new VLAN should appear in the table with the correct IP address and subnet mask assigned.

VLAN Routing Configuration Print Reload Help

VLAN ID	<input type="text" value="2"/> (1 to 4021)
Unit/Slot/Port	<input type="text" value="0/2/1"/>
MAC Address	<input type="text" value="00:11:22:33:44:57"/>

11.2.3.9.2. Viewing VLAN Routing Summary Information

Non-Configurable Data

VLAN ID - The ID of the VLAN whose data is displayed in the current table row

Unit/Slot/Port - The Unit/Slot/Port assigned to the VLAN Routing Interface

MAC Address - The MAC Address assigned to the VLAN Routing Interface

IP Address - The configured IP Address of the VLAN Routing Interface. This will be 0.0.0.0 when the VLAN Routing Interface is first configured and must be entered on the IP Interface Configuration page.

Subnet Mask - The configured Subnet Mask of the VLAN Routing Interface. This will be 0.0.0.0 when the VLAN Routing Interface is first configured and must be entered on the IP Interface Configuration page.

VLAN Routing Summary					Print	Reload	Help
VLAN ID	Unit/Slot/Port	MAC Address	IP Address	Subnet Mask			
2	0/2/1	00:11:22:33:44:57	0.0.0.0	0.0.0.0			

11.2.3.10 Managing VRRP

11.2.3.10.1. Configuring VRRP

Configurable Data

VRRP Admin Mode - This sets the administrative status of VRRP in the router to active or inactive. Select enable or disable from the pulldown menu. The default is disable.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

VRRP Configuration		Print	Reload	Help
Admin Mode <input type="text" value="Disable"/>				
<input type="button" value="Submit"/>				

11.2.3.10.2. Configuring Virtual Router

Selection Criteria

VRID and Unit/Slot/Port - Select 'Create' from the pulldown menu to configure a new Virtual Router, or select one of the existing Virtual Routers, listed by interface number and VRID.

Configurable Data

VRID - This field is only configurable if you are creating new Virtual Router, in which case enter the VRID in the range 1 to 255 .

Unit/Slot/Port - This field is only configurable if you are creating new Virtual Router, in which case select the Unit/Slot/Port for the new Virtual Router from the pulldown menu.

Pre-empt Mode - Select enable or disable from the pulldown menu. If you select enable a backup router will preempt the master router if it has a priority greater than the master virtual router's priority provided the master is not the owner of the virtual router IP address. The default is enable.

Priority - Enter the priority value to be used by the VRRP router in the election for the master virtual router. If the Virtual IP Address is the same as the interface IP Address, the priority gets set to 255 no matter what the user enters. If the user enters a priority of 255 when the Virtual and interface IP Addresses are not the same, the priority gets set to the default value of 100.

Advertisement Interval - Enter the time, in seconds, between the transmission of advertisement packets by this virtual router. Enter a number between 1 and 255. The default value is 1 second.

IP Address - Enter the IP Address associated with the Virtual Router. The default is 0.0.0.0.

Authentication Type - Select the type of Authentication for the Virtual Router from the pulldown menu. The default is None. The choices are:

- **0-None** - No authentication will be performed.
- **1-Key** - Authentication will be performed using a text password.

Authentication Data - If you selected simple authentication, enter the password.

Status - Select active or inactive from the pulldown menu to start or stop the operation of the Virtual Router. The default is inactive.

Non-Configurable Data

Interface IP Address - Indicates the IP Address associated with the selected interface.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Delete - Delete the selected Virtual Router. Note that the router can not be deleted if there are secondary addresses configured.

Secondary IP Address - Proceed to the Secondary IP Address configuration screen.

Virtual Router Configuration Print Reload Help

VRID and Unit/Slot/Port	1 - 0/2/1
VRID	1
Unit/Slot/Port	0/2/1
Pre-empt Mode	Enable
Priority	100 (1 to 255)
Advertisement Interval (secs)	1 (1 to 255)
Interface IP Address	0.0.0.0
IP Address	192.168.6.1
Authentication Type	0 - None
Authentication Data	
Status	Inactive

Submit Secondary IP Address Delete

11.2.3.10.3. Viewing Virtual Router Status

Non-Configurable Data

VRID - Virtual Router Identifier.

Unit/Slot/Port - Indicates the interface associate with the VRID.

Priority - The priority value used by the VRRP router in the election for the master virtual router.

Pre-empt Mode -

- **Enable** - if the Virtual Router is a backup router it will preempt the master router if it has a priority greater than the master virtual router's priority provided the master is not the owner of the virtual router IP address.
- **Disable** - if the Virtual Router is a backup router it will not preempt the master router even if its priority is greater.

Advertisement Interval - the time, in seconds, between the transmission of advertisement packets by this virtual router.

Virtual IP Address - The IP Address associated with the Virtual Router.

Interface IP Address - The actual IP Address associated with the interface used by the Virtual Router.

Owner - Set to 'True' if the Virtual IP Address and the Interface IP Address are the same, otherwise set to 'False'. If this parameter is set to 'True', the Virtual Router is the owner of the Virtual IP Address, and will always win an election for master router when it is active.

VMAC Address - The virtual MAC Address associated with the Virtual Router, composed of a 24 bit organizationally unique identifier, the 16 bit constant identifying the VRRP address block and the 8 bit VRID.

Auth Type - The type of authentication in use for the Virtual Router

- **None**
- **Simple**

State - The current state of the Virtual Router:

- **Initialize**
- **Master**
- **Backup**

Status - The current status of the Virtual Router:

- **Inactive**
- **Active**

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Virtual Router Status								
<div>  Print  Reload  Help </div>								
VRID	Unit/Slot/Port	Priority	Pre-empt Mode	Advertisement Interval (secs)	Virtual IP Address	Interface IP Address	Owner	VM
1	0/2/1	100	Enable	1	192.168.6.1	0.0.0.0	False	00:00
<div>Refresh</div>								

11.2.3.10.4. Viewing Virtual Router Statistics

Selection Criteria

VRID and Unit/Slot/Port - Select the existing Virtual Router, listed by interface number and VRID, for which you want to display statistical information.

Non-Configurable Data

Router Checksum Errors - The total number of VRRP packets received with an invalid VRRP checksum value.

Router Version Errors - The total number of VRRP packets received with an unknown or unsupported version number.

Router VRID Errors - The total number of VRRP packets received with an invalid VRID for this virtual router.

VRID - the VRID for the selected Virtual Router.

Unit/Slot/Port - The Unit/Slot/Port for the selected Virtual Router.

Up Time - The time, in days, hours, minutes and seconds, that has elapsed since the virtual router transitioned to the initialized state.

State Transitioned to Master - The total number of times that this virtual router's state has transitioned to Master.

Advertisement Received - The total number of VRRP advertisements received by this virtual router.

Advertisement Interval Errors - The total number of VRRP advertisement packets received for which the advertisement interval was different than the one configured for the local virtual router .

Authentication Failure - The total number of VRRP packets received that did not pass the authentication check.

IP TTL Errors - The total number of VRRP packets received by the virtual router with IP TTL (Time-To-Live) not equal to 255.

Zero Priority Packets Received - The total number of VRRP packets received by the virtual router with a priority of '0'.

Zero Priority Packets Sent - The total number of VRRP packets sent by the virtual router with a priority of '0'.

Invalid Type Packets Received - The number of VRRP packets received by the virtual router with an invalid value in the 'type' field.

Address List Errors - The total number of packets received for which the address list does not match the locally configured list for the virtual router.

Invalid Authentication Type - The total number of packets received with an unknown authentication type.




Authentication Type Mismatch - The total number of packets received with an authentication type different to the locally configured authentication method.

Packet Length Errors - The total number of packets received with a packet length less than the length of the VRRP header.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the switch.

Virtual Router Statistics

 **Print**  **Reload**  **Help**

Router Checksum Errors	0
Router Version Errors	0
Router VRID Errors	0
VRID and Unit/Slot/Port	1 - 0/2/1 ▾
VRID	1
Port	0/2/1
Up Time	0 days 0 hrs 0 mins 0 secs
State Transitioned to Master	0
Advertisement Received	0
Advertisement Interval Errors	0
Authentication Failure	0
IP TTL Errors	0
Zero Priority Packets Received	0
Zero Priority Packets Sent	0
Invalid Type Packets Received	0
Address List Errors	0
Invalid Authentication Type	0
Authentication Type Mismatch	0
Packet Length Errors	0

Refresh

11.2.4 Security Menu

11.2.4.1 Managing Access Control (802.1x)


11.2.4.1.1. Defining Access Control Page

Configurable Data

Administrative Mode - This selector lists the two options for administrative mode: enable and disable. The default value is disabled.

Command Buttons

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

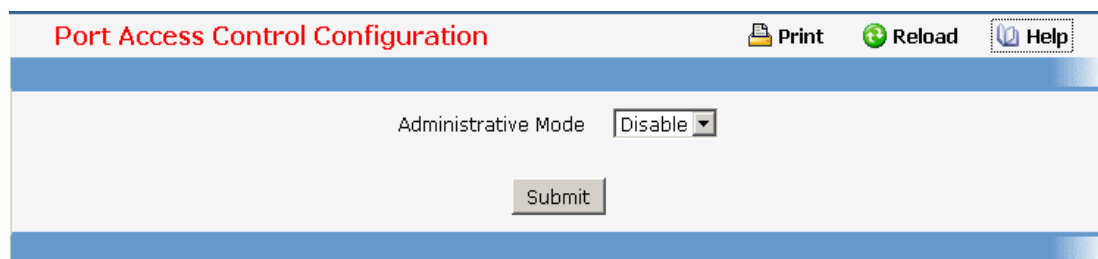

11.2.4.1.2. Configuring each Port Access Control Configuration Page

Selection Criteria

Port - Selects the port to be configured. When the selection is changed, a screen refresh will occur causing all fields to be updated for the newly selected port. All physical interfaces are valid.

Configurable Data

Control Mode - This selector lists the options for control mode. The control mode is only set if the link status of the port is link up. The options are:

force unauthorized: The authenticator port access entity (PAE) unconditionally sets the controlled port to unauthorized

force authorized: The authenticator PAE unconditionally sets the controlled port to authorized.

auto: The authenticator PAE sets the controlled port mode to reflect the outcome of the authentication exchanges between the supplicant, authenticator, and the authentication server.

Quiet Period - This input field allows the user to configure the quiet period for the selected port. This command sets the value, in seconds, of the timer used by the authenticator state machine on this port to define periods of time in which it will not attempt to acquire a supplicant. The quiet period is the period for which the authenticator does not attempt to acquire a supplicant after a failed authentication exchange with the supplicant. The quiet period must be a number in the range of 0 and 65535. A quiet period value of 0 means that the authenticator state machine will never acquire a supplicant. The default value is 60. Changing the value will not change the configuration until the Submit button is pressed.

Transmit Period - This input field allows the user to configure the transmit period for the selected port. The transmit period is the value, in seconds, of the timer used by the authenticator state machine on the specified port to determine when to send an EAPOL EAP Request/Identity frame to the supplicant. The transmit period must be a number in the range of 1 to 65535. The default value is 30. Changing the value will not change the configuration until the Submit button is pressed.

Supplicant Timeout - This input field allows the user to enter the supplicant timeout for the selected port. The supplicant timeout is the value, in seconds, of the timer used by the authenticator state machine on this port to timeout the supplicant. The supplicant timeout must be a value in the range of 1 to 65535. The default value is 30. Changing the value will not change the configuration until the Submit button is pressed.

Server Timeout - This input field allows the user to enter the server timeout for the selected port. The server timeout is the value, in seconds, of the timer used by the authenticator on this port to timeout the authentication server. The server timeout must be

a value in the range of 1 to 65535. The default value is 30. Changing the value will not change the configuration until the Submit button is pressed.

Maximum Requests - This input field allows the user to enter the maximum requests for the selected port. The maximum requests value is the maximum number of times the authenticator state machine on this port will retransmit an EAPOL EAP Request/Identity before timing out the supplicant. The maximum requests value must be in the range of 1 to 10. The default value is 2. Changing the value will not change the configuration until the Submit button is pressed.

Reauthentication Period - This input field allows the user to enter the reauthentication period for the selected port. The reauthentication period is the value, in seconds, of the timer used by the authenticator state machine on this port to determine when reauthentication of the supplicant takes place. The reauthentication period must be a value in the range of 1 to 65535. The default value is 3600. Changing the value will not change the configuration until the Submit button is pressed.

Reauthentication Enabled - This field allows the user to enable or disable reauthentication of the supplicant for the specified port. The selectable values are 'true' and 'false'. If the value is 'true' reauthentication will occur. Otherwise, reauthentication will not be allowed. The default value is false. Changing the selection will not change the configuration until the Submit button is pressed.

Command Buttons




Initialize - This button begins the initialization sequence on the selected port. This button is only selectable if the control mode is 'auto'. If the button is not selectable, it will be grayed out. Once this button is pressed, the action is immediate. It is not required to press the Submit button for the action to occur.

Reauthenticate - This button begins the reauthentication sequence on the selected port. This button is only selectable if the control mode is 'auto'. If the button is not selectable, it will be grayed out. Once this button is pressed, the action is immediate. It is not required to press the Submit button for the action to occur.

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

Refresh - Update the information on the page.

Port Access Control Port Configuration

 **Print** **Reload** **Help**

Port	<input type="text" value="1/0/1"/>
Control Mode	<input type="text" value="Auto"/>
Quiet Period (secs)	<input type="text" value="60"/> (0 to 65535)
Transmit Period (secs)	<input type="text" value="30"/> (1 to 65535)
Supplicant Timeout (secs)	<input type="text" value="30"/> (1 to 65535)
Server Timeout (secs)	<input type="text" value="30"/> (1 to 65535)
Maximum Requests	<input type="text" value="2"/> (1 to 10)
Reauthentication Period (secs)	<input type="text" value="3600"/> (1 to 65535)
Reauthentication Enabled	<input type="text" value="False"/>

Initialize

Reauthenticate

Submit

Refresh

11.2.4.1.3. Viewing each Port Access Control Configuration Information Page

Selection Criteria

Port - Selects the port to be displayed. When the selection is changed, a screen refresh will occur causing all fields to be updated for the newly selected port. All physical interfaces are valid.

Non-Configurable Data

Control Mode - Displays the configured control mode for the specified port. Options are:

force unauthorized: The authenticator port access entity (PAE) unconditionally sets the controlled port to unauthorized

force authorized: The authenticator PAE unconditionally sets the controlled port to authorized.

auto: The authenticator PAE sets the controlled port mode to reflect the outcome of the authentication exchanges between the supplicant, authenticator, and the authentication server.

Quiet Period - This field displays the configured quiet period for the selected port. This quiet period is the value, in seconds, of the timer used by the authenticator state machine on this port to define periods of time in which it will not attempt to acquire a supplicant. The quiet period is the period for which the authenticator does not attempt to acquire a supplicant after a failed authentication exchange with the supplicant. The quiet period is a number in the range of 0 and 65535.

Transmit Period - This field displays the configured transmit period for the selected port. The transmit period is the value, in seconds, of the timer used by the authenticator state machine on the specified port to determine when to send an EAPOL EAP Request/Identity frame to the supplicant. The transmit period is a number in the range of 1 to 65535.

Supplicant Timeout - This field displays the configured supplicant timeout for the selected port. The supplicant timeout is the value, in seconds, of the timer used by the authenticator state machine on this port to timeout the supplicant. The supplicant timeout is a value in the range of 1 to 65535.

Server Timeout - This field displays the configured server timeout for the selected port. The server timeout is the value, in seconds, of the timer used by the authenticator on this port to timeout the authentication server. The server timeout is a value in the range of 1 to 65535.

Maximum Requests - This field displays the configured maximum requests for the selected port. The maximum requests value is the maximum number of times the authenticator state machine on this port will retransmit an EAPOL EAP Request/Identity before timing out the supplicant. The maximum requests value is in the range of 1 to 10.

Reauthentication Period - This field displays the configured reauthentication period for the selected port. The reauthentication period is the value, in seconds, of the timer used by the authenticator state machine on this port to determine when reauthentication of the supplicant takes place. The reauthentication period is a value in the range of 1 to 65535.

Reauthentication Enabled - This field displays if reauthentication is enabled on the selected port. This is a configurable field. The possible values are 'true' and 'false'. If the value is 'true' reauthentication will occur. Otherwise, reauthentication will not be allowed.

Control Direction - This displays the control direction for the specified port. The control direction dictates the degree to which protocol exchanges take place between Supplicant

and Authenticator. This affects whether the unauthorized controlled port exerts control over communication in both directions (disabling both incoming and outgoing frames) or just in the incoming direction (disabling only the reception of incoming frames). This field is not configurable on some platforms.

Protocol Version - This field displays the protocol version associated with the selected port. The only possible value is 1, corresponding to the first version of the 802.1x specification. This field is not configurable.

PAE Capabilities - This field displays the port access entity (PAE) functionality of the selected port. Possible values are "Authenticator" or "Supplicant". This field is not configurable.

Authenticator PAE State - This field displays the current state of the authenticator PAE state machine. Possible values are:

- "Initialize"
- "Disconnected"
- "Connecting"
- "Authenticating"
- "Authenticated"
- "Aborting"
- "Held"
- "ForceAuthorized"
- "ForceUnauthorized".

Backend State - This field displays the current state of the backend authentication state machine. Possible values are:

- "Request"
- "Response"
- "Success"
- "Fail"
- "Timeout"
- "Initialize"
- "Idle"

Command Buttons

Refresh - Update the information on the page.

Port Access Control Status
Print
Reload
Help

Port	1/0/1
Control Mode	Auto
Quiet Period (secs)	60
Transmit Period (secs)	30
Supplicant Timeout (secs)	30
Server Timeout (secs)	30
Maximum Requests	2
Reauthentication Period (secs)	3600
Reauthentication Enabled	False
Control Direction	Both
Protocol Version	1
PAE Capabilities	Authenticator
Authenticator PAE State	Initialize
Backend State	Initialize

Refresh

11.2.4.1.4. Viewing Access Control Summary Page

Non-Configurable Data

Port - Specifies the port whose settings are displayed in the current table row.

Control Mode - This field indicates the configured control mode for the port. Possible values are:

Force Unauthorized: The authenticator port access entity (PAE) unconditionally sets the controlled port to unauthorized.

Force Authorized: The authenticator PAE unconditionally sets the controlled port to authorized.

Auto: The authenticator PAE sets the controlled port mode to reflect the outcome of the authentication exchanges between the supplicant, authenticator, and the authentication server.

Operating Control Mode - This field indicates the control mode under which the port is actually operating. Possible values are:

ForceUnauthorized

ForceAuthorized




Auto

Reauthentication Enabled - This field shows whether reauthentication of the supplicant for the specified port is allowed. The possible values are 'true' and 'false'. If the value is 'true' reauthentication will occur. Otherwise, reauthentication will not be allowed.

Port Status - This field shows the authorization status of the specified port. The possible values are 'Authorized' and 'Unauthorized'.

Command Buttons

Refresh - Update the information on the page.

Port Access Control Port Summary					 Print  Reload  Help
Port	Control Mode	Operating Control Mode	Reauthentication Enabled	Port Status	
1/0/1	Auto	Auto	false	Authorized	
1/0/2	Auto	Auto	false	Authorized	
1/0/3	Auto	Auto	false	Authorized	
1/0/4	Auto	Auto	false	Authorized	
1/0/5	Auto	Auto	false	Authorized	
1/0/6	Auto	Auto	false	Authorized	
1/0/7	Auto	Auto	false	Authorized	
1/0/8	Auto	Auto	false	Authorized	
1/0/9	Auto	Auto	false	Authorized	
1/0/10	Auto	Auto	false	Authorized	
1/0/11	Auto	Auto	false	Authorized	
1/0/12	Auto	Auto	false	Authorized	
1/0/13	Auto	Auto	false	Authorized	
1/0/14	Auto	Auto	false	Authorized	
1/0/15	Auto	Auto	false	Authorized	
1/0/16	Auto	Auto	false	Authorized	
1/0/17	Auto	Auto	false	Authorized	
1/0/18	Auto	Auto	false	Authorized	

Refresh

11.2.4.1.5. Viewing each Port Access Control Statistics Page

Selection Criteria

Port - Selects the port to be displayed. When the selection is changed, a screen refresh will occur causing all fields to be updated for the newly selected port. All physical interfaces are valid.

Non-Configurable Data

EAPOL Frames Received - This displays the number of valid EAPOL frames of any type that have been received by this authenticator.

EAPOL Frames Transmitted - This displays the number of EAPOL frames of any type that have been transmitted by this authenticator.

EAPOL Start Frames Received - This displays the number of EAPOL start frames that have been received by this authenticator.

EAPOL Logoff Frames Received - This displays the number of EAPOL logoff frames that have been received by this authenticator.

Last EAPOL Frame Version - This displays the protocol version number carried in the most recently received EAPOL frame.

Last EAPOL Frame Source - This displays the source MAC address carried in the most recently received EAPOL frame.

EAP Response/Id Frames Received - This displays the number of EAP response/identity

frames that have been received by this authenticator.

EAP Response Frames Received - This displays the number of valid EAP response frames (other than resp/id frames) that have been received by this authenticator.

EAP Request/Id Frames Transmitted - This displays the number of EAP request/identity frames that have been transmitted by this authenticator.

EAP Request Frames Transmitted - This displays the number of EAP request frames (other than request/identity frames) that have been transmitted by this authenticator.

Invalid EAPOL Frames Transmitted - This displays the number of EAPOL frames that have been received by this authenticator in which the frame type is not recognized.

EAP Length Error Frames Received - This displays the number of EAPOL frames that have been received by this authenticator in which the frame type is not recognized.

Command Buttons

Refresh - Update the information on the page.

Clear All - This button resets all statistics for all ports to 0. There is no confirmation prompt. When this button is pressed, the stats are immediately cleared.

Clear - This button resets the statistics for the selected port. There is no confirmation prompt. When this button is pressed, the stats are immediately cleared.

Port Access Control Statistics	
Port	1/0/1
EAPOL Frames Received	0
EAPOL Frames Transmitted	0
EAPOL Start Frames Received	0
EAPOL Logoff Frames Received	0
Last EAPOL Frame Version	0
Last EAPOL Frame Source	00:00:00:00:00:00
EAP Response/ID Frames Received	0
EAP Response Frames Received	0
EAP Request/ID Frames Transmitted	0
EAP Request Frames Transmitted	0
Invalid EAPOL Frames Received	0
EAPOL Length Error Frames Received	0

Refresh Clear All Clear

11.2.4.1.6. Defining Access Control User Login Page

Selection Criteria

Users - Selects the user name that will use the selected login list for 802.1x port security.

Configurable Data

Login - Selects the login to apply to the specified user. All configured logins are displayed.

Command Buttons

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch but these changes will not be retained across a power cycle unless a save is

performed.

Refresh - Update the information on the page.

The screenshot shows a web interface titled "Port Access Control User Login Configuration". At the top right, there are three icons: "Print", "Reload", and "Help". The main content area has a "Users" dropdown menu with "admin" selected, and a "Login" text input field. Below these is a "defaultList" button. At the bottom are "Submit" and "Refresh" buttons.

11.2.4.1.7. Defining each Port Access Privileges Page

Selection Criteria

Port - Selects the port to configure.

Configurable Data

Users - Selects the users that have access to the specified port or ports.

Command Buttons

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

Refresh - Update the information on the page.

The screenshot shows a web interface titled "Port Access Privileges". At the top right, there are three icons: "Print", "Reload", and "Help". The main content area has a "Port" dropdown menu with "1/0/1" selected, and a "Users" dropdown menu with "admin" and "quest" selected. Below these are "Submit" and "Refresh" buttons.

11.2.4.1.8. Viewing each Port Access Privileges Summary Page

Non-Configurable Data

Port - Displays the port in Slot/Port format.

Users - Displays the users that have access to the port.

Command Buttons

Refresh - Update the information on the page.

Port Access Summary		Print	Reload	Help
Port	Users			
1/0/1	admin guest			
1/0/2	admin guest			
1/0/3	admin guest			
1/0/4	admin guest			
1/0/5	admin guest			
1/0/6	admin guest			
1/0/7	admin guest			
1/0/8	admin guest			
1/0/9	admin guest			
1/0/10	admin guest			
1/0/11	admin guest			
1/0/12	admin guest			
1/0/13	admin guest			
1/0/14	admin guest			
1/0/15	admin guest			
1/0/16	admin guest			
1/0/17	admin guest			
1/0/18	admin guest			
1/0/19	admin guest			
1/0/20	admin guest			
1/0/21	admin guest			
1/0/22	admin guest			
1/0/23	admin guest			
1/0/24	admin guest			
		Refresh		

11.2.4.2 Managing RADIUS

11.2.4.2.1. Configuring RADIUS Configuration Page

Configurable Data

Max Number of Retransmits - The value of the maximum number of times a request packet is retransmitted. The valid range is 1 - 15. Consideration to maximum delay time should be given when configuring RADIUS maxretransmit and RADIUS timeout. If multiple

RADIUS servers are configured, the max retransmit value on each will be exhausted before the next server is attempted. A retransmit will not occur until the configured timeout value on that server has passed without a response from the RADIUS server. Therefore, the maximum delay in receiving a response from the RADIUS application equals the sum of (retransmit times timeout) for all configured servers. If the RADIUS request was generated by a user login attempt, all user interfaces will be blocked until the RADIUS application returns a response.

Timeout Duration (secs) - The timeout value, in seconds, for request retransmissions. The valid range is 1 - 30. Consideration to maximum delay time should be given when configuring RADIUS maxretransmit and RADIUS timeout. If multiple RADIUS servers are configured, the max retransmit value on each will be exhausted before the next server is attempted. A retransmit will not occur until the configured timeout value on that server has passed without a response from the RADIUS server. Therefore, the maximum delay in receiving a response from the RADIUS application equals the sum of (retransmit times timeout) for all configured servers. If the RADIUS request was generated by a user login attempt, all user interfaces will be blocked until the RADIUS application returns a response.

Accounting Mode - Selects if the RADIUS accounting mode is enabled or disabled.

Non-Configurable Data

Current Server IP Address - The IP address of the current server. This field is blank if no servers are configured.

Number of Configured Servers - The number of RADIUS servers that have been configured. This value will be in the range of 0 and 3.

Command Buttons

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

Refresh - Update the information on the page.

The screenshot shows a web browser window titled "RADIUS Configuration". At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". The main content area has a light blue background and contains the following configuration details:

Current Server IP Address	192.168.2.103
Number of Configured Servers	1
Max Number of Retransmits	<input type="text" value="4"/> (1 to 15)
Timeout Duration (secs)	<input type="text" value="5"/> (1 to 30)
Accounting Mode	<input type="button" value="Disable"/>

At the bottom of the configuration area, there are two buttons: "Submit" and "Refresh".


11.2.4.2.2. Viewing Radius Statistics Page

Non-Configurable Data

Invalid Server Addresses - The number of RADIUS Access-Response packets received from unknown addresses.

Command Buttons

Refresh - Update the information on the page.

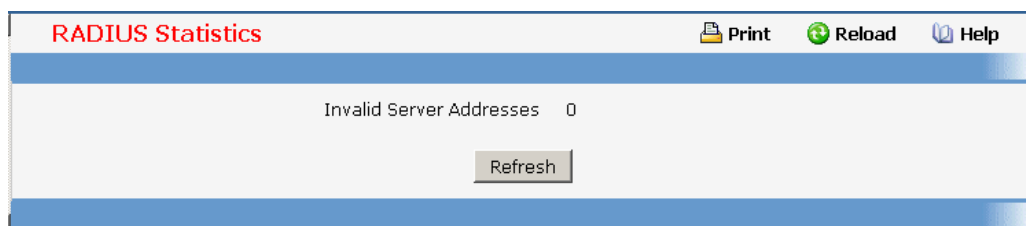

11.2.4.2.3. Configuring RADIUS Server Configuration Page

Selection Criteria

RADIUS Server IP Address - Selects the RADIUS server to be configured. Select add to add a server.

Configurable Data

IP Address - The IP address of the server being added.

Port - The UDP port used by this server. The valid range is 0 - 65535.

Secret - The shared secret for this server. This is an input field only.

Apply - The Secret will only be applied if this box is checked. If the box is not checked, anything entered in the Secret field will have no affect and will not be retained. This field is only displayed if the user has READWRITE access.

Primary Server - Sets the selected server to the Primary or Secondary server.

Message Authenticator - Enable or disable the message authenticator attribute for the selected server.

Non-Configurable Data

Current - Indicates if this server is currently in use as the authentication server.

Secret Configured - Indicates if the shared secret for this server has been configured.

Command Buttons

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

Remove - Remove the selected server from the configuration. This button is only available to READWRITE users. These changes will not be retained across a power cycle unless a save is performed.

Refresh - Update the information on the page.

RADIUS Server Configuration

Print Reload Help

RADIUS Server IP Address: 192.168.2.103

Port: 1812 (0 to 65535)

Secret: ☐ Apply

Primary Server: No

Message Authenticator: Enable

Secret Configured: No

Current: Yes

Submit Remove Refresh

11.2.4.2.4. Viewing RADIUS Server Statistics Page

Selection Criteria

RADIUS Server IP Address - Selects the IP address of the RADIUS server for which to display statistics.

Non-Configurable Data

Round Trip Time (secs) - The time interval, in hundredths of a second, between the most recent Access-Reply/Access-Challenge and the Access-Request that matched it from this RADIUS authentication server.

Access Requests - The number of RADIUS Access-Request packets sent to this server. This number does not include retransmissions.

Access Retransmissions - The number of RADIUS Access-Request packets retransmitted to this server.

Access Accepts - The number of RADIUS Access-Accept packets, including both valid and invalid packets that were received from this server.

Access Rejects - The number of RADIUS Access-Reject packets, including both valid and invalid packets that were received from this server.

Access Challenges - The number of RADIUS Access-Challenge packets, including both valid and invalid packets that were received from this server.

Malformed Access Responses - The number of malformed RADIUS Access-Response packets received from this server. Malformed packets include packets with an invalid length. Bad authenticators or signature attributes or unknown types are not included as malformed access-responses.

Bad Authenticators - The number of RADIUS Access-Response packets containing invalid authenticators or signature attributes received from this server.

Pending Requests - The number of RADIUS Access-Request packets destined for this server that have not yet timed out or received a response.

Timeouts - The number of authentication timeouts to this server.

Unknown Types - The number of RADIUS packets of unknown type which were received from this server on the authentication port.

Packets Dropped - The number of RADIUS packets received from this server on the

authentication port and dropped for some other reason.

Command Buttons

Refresh - Update the information on the page.

RADIUS Server Statistics	
RADIUS Server IP Address	192.168.2.103
Round Trip Time (secs)	0.00
Access Requests	0
Access Retransmissions	0
Access Accepts	0
Access Rejects	0
Access Challenges	0
Malformed Access Responses	0
Bad Authenticators	0
Pending Requests	0
Timeouts	0
Unknown Types	0
Packets Dropped	0

11.2.4.2.5. Defining RADIUS Accounting Server Configuration Page

Selection Criteria

Accounting Server IP Address - Selects the accounting server for which data is to be displayed or configured. If the add item is selected, a new accounting server can be configured.

Configurable Data

IP Address - The IP address of the accounting server to add. This field is only configurable if the add item is selected.

Port - Specifies the UDP Port to be used by the accounting server. The valid range is 0 - 65535. If the user has READONLY access, the value is displayed but cannot be changed.

Secret - Specifies the shared secret to use with the specified accounting server. This field is only displayed if the user has READWRITE access.

Apply - The Secret will only be applied if this box is checked. If the box is not checked, anything entered in the Secret field will have no affect and will not be retained. This field is only displayed if the user has READWRITE access.

Non-Configurable Data

Secret Configured - Indicates if the secret has been configured for this accounting server.


Command Buttons

Submit - Sends the updated screen to the switch and causes the changes to take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

Remove - Remove the selected accounting server from the configuration. This button is

only available to READWRITE users. These changes will not be retained across a power cycle unless a save is performed.

Refresh - Update the information on the page.

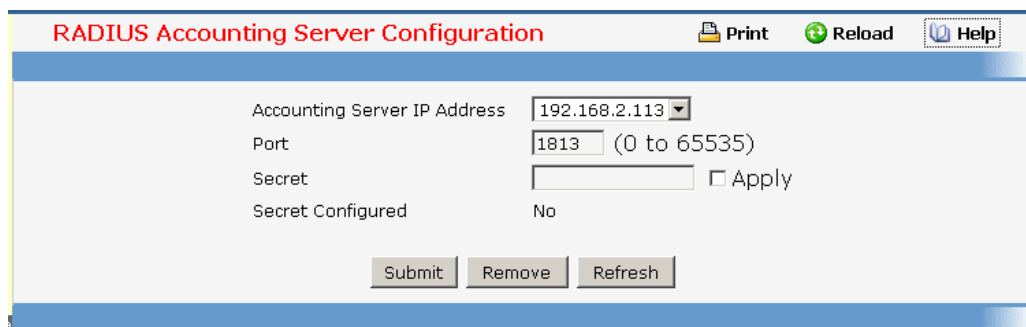

11.2.4.2.6. Viewing RADIUS Accounting Server Statistics Page

Non-Configurable Statistics

Accounting Server IP Address - Identifies the accounting server associated with the statistics.

Round Trip Time (secs) - Displays the time interval, in hundredths of a second, between the most recent Accounting-Response and the Accounting-Request that matched it from this RADIUS accounting server.

Accounting Requests - Displays the number of RADIUS Accounting-Request packets sent not including retransmissions.

Accounting Retransmissions - Displays the number of RADIUS Accounting-Request packets retransmitted to this RADIUS accounting server.

Accounting Responses - Displays the number of RADIUS packets received on the accounting port from this server.

Malformed Accounting Responses - Displays the number of malformed RADIUS Accounting-Response packets received from this server. Malformed packets include packets with an invalid length. Bad authenticators and unknown types are not included as malformed accounting responses.

Bad Authenticators - Displays the number of RADIUS Accounting-Response packets that contained invalid authenticators received from this accounting server.

Pending Requests - Displays the number of RADIUS Accounting-Request packets sent to this server that have not yet timed out or received a response.

Timeouts - Displays the number of accounting timeouts to this server.

Unknown Types - Displays the number of RADIUS packets of unknown type that were received from this server on the accounting port.

Packets Dropped - Displays the number of RADIUS packets that were received from this server on the accounting port and dropped for some other reason.

Command Buttons

Refresh - Update the information on the page.




Accounting Server IP Address	192.168.2.113
Round Trip Time (secs)	0.00
Accounting Requests	0
Accounting Retransmissions	0
Accounting Responses	0
Malformed Accounting Responses	0
Bad Authenticators	0
Pending Requests	0
Timeouts	0
Unknown Types	0
Packets Dropped	0

11.2.4.2.7. Resetting All RADIUS Statistics Page

Command Buttons

Clear All RADIUS Statistics - This button will clear the accounting server, authentication server, and RADIUS statistics.

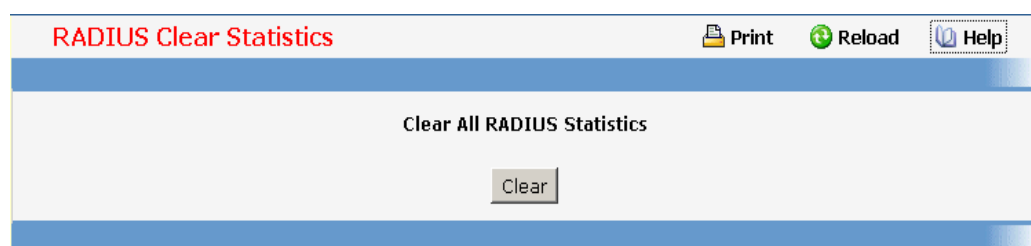

Clear All RADIUS Statistics

Clear

11.2.4.3 Defining TACACS Configuration

11.2.4.3.1. Configuring TACACS Configuration Page

Use this menu to configure the parameters for TACACS+, which is used to verify the login user's authentication. Note that only a user with Read/Write access privileges may change the data on this screen.

Configurable Data

Authen. State - TACACS+ administration mode which are Enable and Disable.

Server ID - The TACACS+ server index which are 1, 2, and 3.

Authen. Server - TACACS+ server IP address.

Authen. Port - The TCP port number of TACACS+.

Server Time Out - Timeout value of TACACS+ packet transmit.

Retry Count - Retry count after transmit timeout.

Status - The TACACS+ server status which are "disable", "master" and "slave".

Share Secret - The key only transmit between TACACS+ client and server..

Command Buttons

Submit - Send the updated screen to the switch. Changes take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

Clear All - Reset all configured to default.

Server ID	IP Addr	Port	Time Out	Retry	Status
1	0.0.0.0	49	3	5	Disable
2	0.0.0.0	49	3	5	Disable
3	0.0.0.0	49	3	5	Disable

11.2.4.4 Defining IP Filter Configuration

11.2.4.4.1. IP Filter Configuration Page

Management IP filter designates stations that are allowed to make configuration changes to the Switch. Select up to five management stations used to manage the Switch. If you choose to define one or more designated management stations, only the chosen stations, as defined by IP address, will be allowed management privilege through the web manager, Telnet session, Secure Shell (SSH) or Secure Socket Layer (SSL) for secure HTTP.

Configurable Data

Filter Address 1~5 - Stations that are allowed to make configuration changes to the Switch.

Command Buttons

Submit - Send the updated screen to the switch. Changes take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

IP Filter Configuration

Print Reload Help

Admin Mode

Filter Address 1 (0.0.0.0 = Disable)

Filter Address 2 (0.0.0.0 = Disable)

Filter Address 3 (0.0.0.0 = Disable)

Filter Address 4 (0.0.0.0 = Disable)

Filter Address 5 (0.0.0.0 = Disable)

Submit

11.2.4.5 Defining Secure Http Configuration

11.2.4.5.1. Secure HTTP Configuration Page

Configurable Data

Admin Mode - This field is used to enable or disable the Administrative Mode of Secure HTTP. The currently configured value is shown when the web page is displayed. The default value is disabled.

TLS Version 1 - This field is used to enable or disable Transport Layer Security Version 1.0. The currently configured value is shown when the web page is displayed. The default value is enabled.


SSL Version 3 - This field is used to enable or disable Secure Sockets Layer Version 3.0. The currently configured value is shown when the web page is displayed. The default value is enabled.

HTTPS Port Number - This field is used to set the HTTPS Port Number. The value must be in the range of 1 to 65535. Port 443 is the default value. The currently configured value is shown when the web page is displayed.

Command Buttons

Submit - Send the updated screen to the switch. Changes take effect on the switch but these changes will not be retained across a power cycle unless a save is performed.

Download Certificates - Link to the File Transfer page for the SSL Certificate download. Note that to download SSL Certificate files SSL must be administratively disabled.

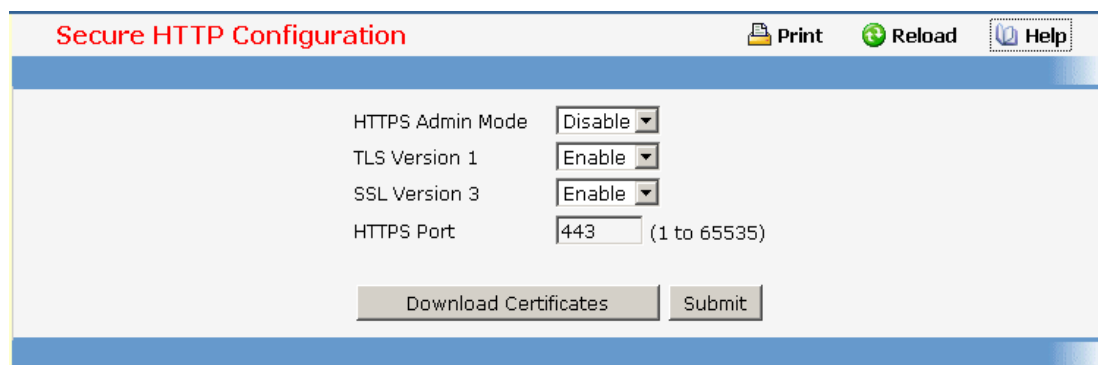

11.2.4.6 Defining Secure Shell Configuration

11.2.4.6.1. Configuring Secure Shell Configuration Page

Configurable Data

Admin Mode - This select field is used to Enable or Disable the administrative mode of SSH. The currently configured value is shown when the web page is displayed. The default value is Disable.

SSH Version 1 - This select field is used to Enable or Disable Protocol Level 1 for SSH. The currently configured value is shown when the web page is displayed. The default value is Enable.

SSH Version 2 - This select field is used to Enable or Disable Protocol Level 2 for SSH. The currently configured value is shown when the web page is displayed. The default value is Enable.

Maximum Number of SSH Sessions Allowed - This select field is used to configure the maximum number of inbound SSH sessions allowed on the switch. The currently configured value is shown when the web page is displayed. The range of acceptable values for this field is (0-5).

SSH Session Timeout (Minutes) - This text field is used to configure the inactivity timeout value for incoming SSH sessions to the switch. The acceptable range for this value is (1-160) minutes.

Non-Configurable Data


SSH Connections in Use - Displays the number of SSH connections currently in use in the system.

Command Buttons

Submit - Send the updated screen to the switch. Changes take effect on the switch but

these changes will not be retained across a power cycle unless a save is performed.

Download Host Keys - Link to the File Transfer page for the Host Key download. Note that to download SSH key files SSH must be administratively disabled and there can be no active SSH sessions.

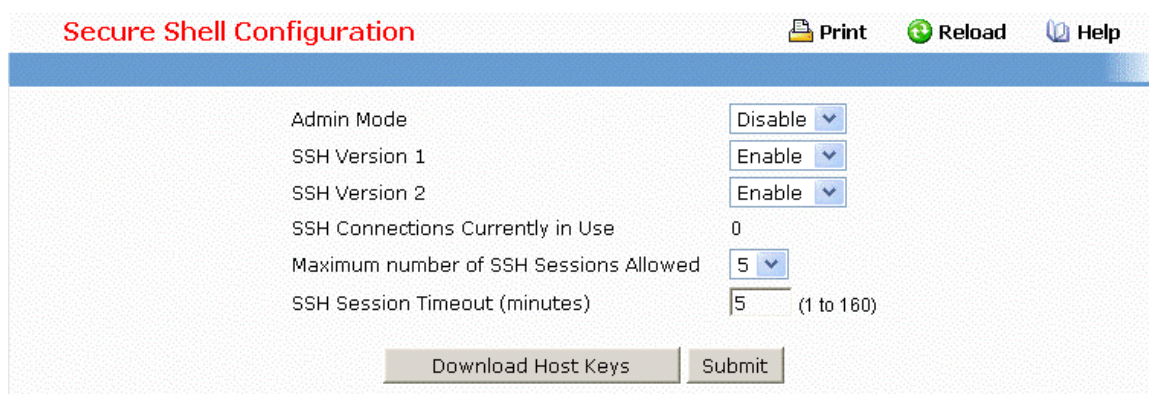

The screenshot shows the 'Secure Shell Configuration' page. At the top, there are three icons: a printer icon labeled 'Print', a circular arrow icon labeled 'Reload', and a question mark icon labeled 'Help'. Below these, the configuration options are listed in a table-like format:

Admin Mode	Disable
SSH Version 1	Enable
SSH Version 2	Enable
SSH Connections Currently in Use	0
Maximum number of SSH Sessions Allowed	5
SSH Session Timeout (minutes)	5 (1 to 180)

At the bottom of the configuration area, there are two buttons: 'Download Host Keys' and 'Submit'.

11.2.5 QOS Menu

11.2.5.1 Managing Access Control Lists

11.2.5.1.1 Configuring IP Access Control List Configuration Page

An IP ACL consists of a set of rules which are matched sequentially against a packet. When a packet meets the match criteria of a rule, the specified rule action (Permit/Deny) is taken and the additional rules are not checked for a match. On this menu the interfaces to which an IP ACL applies must be specified, as well as whether it applies to inbound traffic. Rules for the IP ACL are specified/created using the IP ACL Rule Configuration menu.

Selection Criteria

IP ACL - Make a selection from the pulldown menu. A new IP Access Control List may be created or the configuration of an existing IP ACL can be updated.

Configurable Data

IP ACL ID - IP ACL ID must be a whole number in the range of 1 to 99 for IP Standard Access Lists and 100 to 199 for IP Extended Access Lists.


Non-Configurable Data

Table - Displays the current and maximum number of IP ACLs.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Delete - Removes the currently selected IP ACL from the switch configuration.

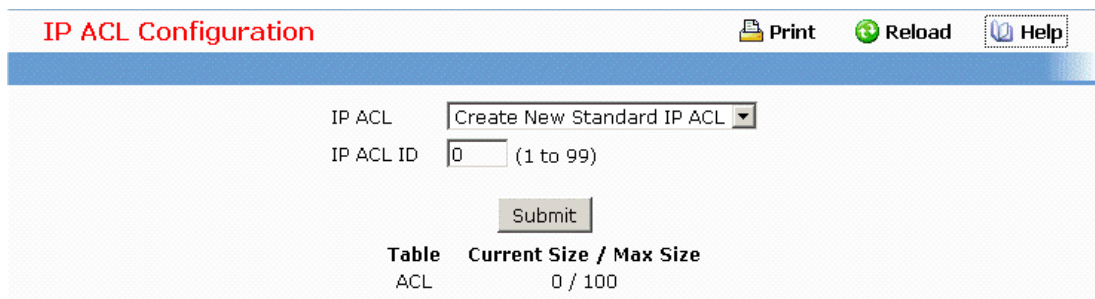

The IP ACL Configuration screen features a title bar with 'IP ACL Configuration' and buttons for 'Print', 'Reload', and 'Help'. Below the title bar, there are two input fields: 'IP ACL' with a dropdown menu set to 'Create New Standard IP ACL' and 'IP ACL ID' with a text box containing '0' and a range '(1 to 99)'. A 'Submit' button is positioned below these fields. At the bottom, a table displays the current state of the ACL configuration.

Table	Current Size / Max Size
ACL	0 / 100

11.2.5.1.2. Viewing IP Access Control List Summary Page

Non-Configurable Data

IP ACL ID - The IP ACL identifier.

Rules - The number of rules currently configured for the IP ACL.

Direction - The direction of packet traffic affected by the IP ACL.
Direction can only be:

- **Inbound**

Unit/Slot/Port(s) - The interfaces to which the IP ACL applies.

Command Buttons

Refresh - Refresh the data on the screen to the latest state.



The IP ACL Summary screen has a title bar with 'IP ACL Summary' and buttons for 'Print', 'Reload', and 'Help'. Below the title bar, a table lists the configured IP ACLs. A 'Refresh' button is located at the bottom of the table.

IP ACL ID	Rules	Direction	Slot/Port
1	1		
100	0		

11.2.5.1.3. Configuring IP Access Control List Rule Configuration Page

Use these screens to configure the rules for the IP Access Control Lists created using the IP Access Control List Configuration screen. What is shown on this screen varies depending on the current step in the rule configuration process. A Standard/Extended IP ACL must first be

selected to configure rules for. The rule identification, and the 'Action' and 'Match Every' parameters must be specified next. If 'Match Every' is set to false a new screen will then be presented from which the match criteria can be configured.

Selection Criteria

IP ACL ID - Use the pulldown menu to select the IP ACL for which to create or update a rule.

Rule - Select an existing rule from the pulldown menu, or select 'Create New Rule.' ACL as well as an option to add a new Rule. New rules cannot be created if the maximum number of rules has been reached. For each rule, a packet must match all the specified criteria in order to be true against that rule and for the specified rule action (Permit/Deny) to take place.

Configurable Data

Rule ID - Enter a whole number in the range of 1 to 8 that will be used to identify the rule. An IP ACL may have up to 8 rules.

Action - Specify what action should be taken if a packet matches the rule's criteria. The choices are permit or deny.

Assign Queue ID - Specifies the hardware egress queue identifier used to handle all packets matching this IP ACL rule. Valid range of Queue Ids is (0 to 6). This field is visible when 'Permit' is chosen as 'Action'.

Redirect Interface - Specifies the specific egress interface where the matching traffic stream is forced, bypassing any forwarding decision normally performed by the device. This field is visible when 'Permit' is chosen as 'Action'.

Match Every - Select true or false from the pulldown menu. True signifies that all packets will match the selected IP ACL and Rule and will be either permitted or denied. In this case, since all packets match the rule, the option of configuring other match criteria will not be offered. To configure specific match criteria for the rule, remove the rule and re-create it, or re-configure 'Match Every' to 'False' for the other match criteria to be visible.

Protocol Keyword - Specify that a packet's IP protocol is a match condition for the selected IP ACL rule. The possible values are ICMP, IGMP, IP, TCP, and UDP. Either the 'Protocol Keyword' field or the 'Protocol Number' field can be used to specify an IP protocol value as a match criterion.

Protocol Number - Specify that a packet's IP protocol is a match condition for the selected IP ACL rule and identify the protocol by number. The protocol number is a standard value assigned by IANA and is interpreted as an integer from 1 to 255. Either the 'Protocol Number' field or the 'Protocol Keyword' field can be used to specify an IP protocol value as a match criterion.

Source IP Address - Enter an IP address using dotted-decimal notation to be compared to a packet's source IP Address as a match criteria for the selected IP ACL rule.

Source IP Mask - Specify the IP Mask in dotted-decimal notation to be used with the Source IP Address value.

Source L4 Port Keyword - Specify a packet's source layer 4 port as a match condition for the selected extended IP ACL rule. This is an optional configuration. The possible values are DOMAIN, ECHO, FTP, FTPDATA, HTTP, SMTP, SNMP, TELNET, TFTP, and WWW. Each of these values translates into its equivalent port number, which is used as both the start and end of the port range.

Source L4 Port Number - Specify a packet's source layer 4 port as a match condition for the selected extended IP ACL rule. This is an optional configuration.

Destination IP Address - Enter an IP address using dotted-decimal notation to be compared to a packet's destination IP Address as a match criteria for the selected extended IP ACL rule.

Destination IP Mask - Specify the IP Mask in dotted-decimal notation to be used with the Destination IP Address value.

Destination L4 Port Keyword - Specify the destination layer 4 port match conditions for the selected extended IP ACL rule. The possible values are DOMAIN, ECHO, FTP, FTPDATA, HTTP, SMTP, SNMP, TELNET, TFTP, and WWW. Each of these values translates into its equivalent port number, which is used as both the start and end of the port range. This is an optional configuration.

Destination L4 Port Number - Specify a packet's destination layer 4 port number match condition for the selected extended IP ACL rule. This is an optional configuration.

Service Type - Select a Service Type match condition for the extended IP ACL rule from the pulldown menu. The possible values are IP DSCP, IP precedence, and IP TOS, which are alternative ways of specifying a match criterion for the same Service Type field in the IP header, however each uses a different user notation. After a selection is made the appropriate value can be specified.

- ***IP DSCP Configuration***

Specify the IP DiffServ Code Point (DSCP) field. The DSCP is defined as the high-order six bits of the Service Type octet in the IP header. This is an optional configuration. Enter an integer from 0 to 63. The IP DSCP is selected by possibly selection one of the DSCP keyword from a dropdown box. If a value is to be selected by specifying its numeric value, then select the 'Other' option in the dropdown box and a text box will appear where the numeric value of the DSCP can be entered.

- ***IP Precedence Configuration***

The IP Precedence field in a packet is defined as the high-order three bits of the Service Type octet in the IP header. This is an optional configuration. Enter an integer from 0 to 7.

- ***IP TOS Configuration***

The IP TOS field in a packet is defined as all eight bits of the Service Type octet in the IP header. The TOS Bits value is a hexadecimal number from 00 to FF. The TOS Mask value is a hexadecimal number from 00 to FF. The TOS Mask denotes the bit positions in the TOS Bits value that are used for comparison against the IP TOS field in a packet. For example, to check for an IP TOS value having bits 7 and 5 set and bit 1 clear, where bit 7 is most significant, use a TOS Bits value of 0xA0 and a TOS Mask of 0xFF. This is an optional configuration.

Command Buttons

Configure - Configure the corresponding match criteria for the selected rule.

Delete - Remove the currently selected Rule from the selected ACL. These changes will not be retained across a power cycle unless a save configuration is performed.

IP ACL Rule Configuration		
IP ACL	100	
Rule	1	
Action	Deny	Configure
Match Every	False	Configure
Protocol Keyword		Configure
Source IP Address		Configure
Source IP Mask		
Source L4 Port		Configure
Destination IP Address		Configure
Destination IP Mask		
Destination L4 Port		Configure
Service Type		Configure
Delete		

11.2.5.1.4. Configuring MAC Access Control List Configuration Page

A MAC ACL consists of a set of rules which are matched sequentially against a packet. When a packet meets the match criteria of a rule, the specified rule action (Permit/Deny) is taken and the additional rules are not checked for a match. On this menu the interfaces to which an MAC ACL applies must be specified, as well as whether it applies to inbound or outbound traffic. Rules for the MAC ACL are specified/created using the MAC ACL Rule Configuration menu.

Selection Criteria

MAC ACL - A new MAC Access Control List may be created or the configuration of an existing MAC ACL can be updated based on selection.

Configurable Data

MAC ACL Name - Specifies MAC ACL Name string which may include alphabetic, numeric, dash, underscore or space characters only. The name must start with an alphabetic character. This field displays the name of the currently selected MAC ACL if the ACL has already been created.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Rename - Renames the currently selected MAC ACL.

Delete - Removes the currently selected MAC ACL from the switch configuration.

MAC ACL Configuration

Print Reload Help

MAC ACL Create New Extended MAC ACL

MAC ACL Name

Submit

Table	Current Size / Max Size
ACL	2 / 100

11.2.5.1.5. Viewing MAC Access Control List Summary Page

Non-Configurable Data

MAC ACL Name - MAC ACL identifier.

Rules - The number of rules currently configured for the MAC ACL.

Direction - The direction of packet traffic affected by the MAC ACL.
Valid Directions

- **Inbound**

Unit/Slot/Port - The interfaces to which the MAC ACL applies.

Command Buttons

Refresh - Refresh the data on the screen to the latest state.

MAC ACL Name	Rules	Direction	Slot/Port
a	0		

Refresh

11.2.5.1.6. Configuring MAC Access Control List Rule Configuration Page

Selection Criteria

MAC ACL - Select the MAC ACL for which to create or update a rule.

Rule - Select an existing rule or select 'Create New Rule' to add a new Rule. New rules cannot be created if the maximum number of rules has been reached. For each rule, a packet must match all the specified criteria in order to be true against that rule and for the specified rule action (Permit/Deny) to take place.

Configurable Data

Rule - Enter a whole number in the range of (1 to 8) that will be used to identify the rule.

Action - Specify what action should be taken if a packet matches the rule's criteria. The choices are permit or deny.

Assign Queue ID - Specifies the hardware egress queue identifier used to handle all packets matching this ACL rule. Valid range of Queue Ids is (0 to 6).

Redirect Interface - Specifies the specific egress interface where the matching traffic stream is forced, bypassing any forwarding decision normally performed by the device.

CoS - Specifies the 802.1p user priority to compare against an Ethernet frame. Valid range of values is (0 to 7).

Destination MAC - Specifies the destination MAC address to compare against an Ethernet frame. Valid format is (xx:xx:xx:xx:xx:xx). The BPDU keyword may be specified using a Destination MAC address of 01:80:C2:xx:xx:xx.

Ethertype Key - Specifies the Ethertype value to compare against an Ethernet frame. Valid values are

- **Appletalk**
- **ARP**
- **IBM SNA**
- **IPv4**
- **IPv6**
- **IPX**
- **MPLS multicast**
- **MPLS unicast**
- **NetBIOS**

- **Novell**
- **PPPoE**
- **Reverse ARP**
- **User Value**

Ethertype User Value - Specifies the user defined customised Ethertype value to be used when the user has selected "User Value" as Ethertype Key, to compare against an Ethernet frame. Valid range of values is (0x0600 to 0xFFFF).

Source MAC - Specifies the Source MAC address to compare against an Ethernet frame. Valid format is (xx:xx:xx:xx:xx:xx).

VLAN - Specifies the VLAN ID to compare against an Ethernet frame. Valid range of values is (1 to 3965). Either VLAN Range or VLAN can be configured.

Match Every - Specifies an indication to match every Layer 2 MAC packet. Valid values are

- **True** - Signifies that every packet is considered to match the selected ACL Rule.
- **False** - Signifies that it is not mandatory for every packet to match the selected ACL Rule.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Delete - Remove the currently selected Rule from the selected ACL. These changes will not be retained across a power cycle unless a save configuration is performed.

The screenshot shows a web interface titled "MAC ACL Rule Configuration". At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". The main configuration area contains the following fields:

- MAC ACL**: A dropdown menu with the value "a" selected.
- Rule**: A dropdown menu with the value "Create New Rule" selected.
- Rule ID**: A text input field with the value "1" and a range indicator "(1 to 8)".
- Action**: A dropdown menu with the value "Deny" selected.
- Match Every**: A dropdown menu with the value "False" selected.

At the bottom of the configuration area, there is a "Submit" button.

11.2.5.1.7. Configuring Access Control List Interface Configuration Page

Configurable Data

Unit/Slot/Port - Specifies list of all available valid interfaces for ACL mapping. All non-routing physical interfaces and interfaces participating in LAGs are listed.

Direction - Specifies the packet filtering direction for ACL.

Valid Directions

- ***Inbound***

ACL Type - Specifies the type of ACL.

Valid ACL Types

- ***IP ACL***
- ***MAC ACL***

IP ACL - Specifies list of all IP ACLs. This field is visible only if the user has selected "IP ACL" as "ACL Type".

MAC ACL - Specifies list of all MAC ACLs. This field is visible only if the user has selected "MAC ACL" as "ACL Type".

Sequence Number - An optional sequence number may be specified to indicate the order of this access list relative to other access lists already assigned to this interface and direction. A lower number indicates higher precedence order. If a sequence number is already in use for this interface and direction, the specified access list replaces the currently attached access list using that sequence number. If the sequence number is not specified by the user, a sequence number that is one greater than the highest sequence number currently in use for this interface and direction will be used. Valid range is (1 to 4294967295).

Non-Configurable Data

Slot/Port - Displays selected interface.

Direction - Displays selected packet filtering direction for ACL.

ACL Type - Displays the type of ACL assigned to selected interface and direction.

ACL Identifier - Displays the ACL Number(in case of IP ACL) or ACL Name(in case of MAC ACL) identifying the ACL assigned to selected interface and direction.

Sequence Number - Displays the Sequence Number signifying the order of specified ACL relative to other ACLs assigned to selected interface and direction.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

ACL Interface Configuration
Print
Reload
Help

Unit/Slot/Port: 1/0/1
Direction: Inbound
ACL Type:
Sequence Number: (1 to 4294967295)
Submit

List of Assigned ACLs

Unit/Slot/Port	Direction	ACL Type	ACL Identifier	Sequence Number
----------------	-----------	----------	----------------	-----------------

11.2.5.2 Managing Differentiated Services

11.2.5.2.1. Defining DiffServ Configuration Page

Operation

Packets are filtered and processed based on defined criteria. The filtering criteria is defined by a class. The processing is defined by a policy's attributes. Policy attributes may be defined on a per-class instance basis, and it is these attributes that are applied when a match occurs.

The configuration process begins with defining one or more match criteria for a class. Then one or more classes are added to a policy. Policies are then added to interfaces.

Packet processing begins by testing the match criteria for a packet. The 'all' class type option defines that each match criteria within a class must evaluate to true for a packet to match that class. The 'any' class type option defines that at least one match criteria must evaluate to true for a packet to match that class. Classes are tested in the order in which they were added to the policy. A policy is applied to a packet when a class match within that policy is found.

Selection Criteria

DiffServ Admin Mode - This lists the options for the mode, from which one can be selected. The default value is 'enable'. While disabled, the DiffServ configuration is retained when saved and can be changed, but it is not activated. When enabled, DiffServ services are activated.

Non-Configurable Data

Class table - Displays the number of configured DiffServ classes out of the total allowed on the switch.

Class Rule table - Displays the number of configured class rules out of the total allowed on the switch.

Policy table - Displays the number of configured policies out of the total allowed on the switch.

Policy Instance table - Displays the number of configured policy class instances out of the total allowed on the switch.

Policy Attributes table - Displays the number of configured policy attributes (attached to

the policy class instances) out of the total allowed on the switch.

Service table - Displays the number of configured services (attached to the policies on specified interfaces) out of the total allowed on the switch.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

MIB Table	Current Size / Max Size
Class Table	0 / 32
Class Rule Table	0 / 352
Policy Table	0 / 64
Policy Instance Table	0 / 640
Policy Attributes Table	0 / 1920
Service Table	0 / 198

11.2.5.2.2. Configuring DiffServ Class Configuration Page

Selection Criteria

Class Selector - Along with an option to create a new class, this lists all the existing DiffServ class names, from which one can be selected. The content of this screen varies based on the selection of this field. If an existing class is selected then the screen will display the configured class. If '--create--' is selected, another screen appears to facilitate creation of a new class. The default is the first class created. If no classes exist, the default is '--create--'.

Class Type - This lists all the platform supported DiffServ class types from which one can be selected. Possible options are 'all', 'any', or 'acl'. If 'acl' is (supported and) selected, then an access list (ACL) number is required which is an integer specifying an existing ACL. Only when a new class is created, is this field a selector field. After class creation this becomes a non-configurable field displaying the configured class type.

Class Match Selector - This lists all match criteria from which one can be selected to be added to a specified class. The match criterion 'Every' denotes that every packet is considered to match the specified class and no additional input information is needed. The content of this drop down list varies for a specified class based on the selection of the match criterion 'Reference Class':

If the specified class does not reference any other class, the 'Reference Class' match criterion is included in the drop down match criteria list. A class reference can be established by selecting 'Reference Class' and invoking the 'Add Match Criteria' button.

If the specified class references another class, the 'Reference Class' match criterion is not included in the drop down match criteria list. This prevents the user from trying to add yet another class reference, since a specified class can reference at most one other

class of the same type. Moreover, a 'Remove Class Reference' button appears on the screen that can be invoked to remove the current class reference.

Configurable Data


Class Name - This is a case-sensitive alphanumeric string from 1 to 31 characters uniquely identifying a class. Class name 'default' is reserved and must not be used.

Non-Configurable Data

Class Type - Displays type of the configured class as 'all', 'any', or 'acl'. Only when a new class is created, is this field a selector field. After class creation this becomes a non-configurable field.

Match Criteria - Displays the configured match criteria for the specified class.

Values - Displays the values of the configured match criteria.

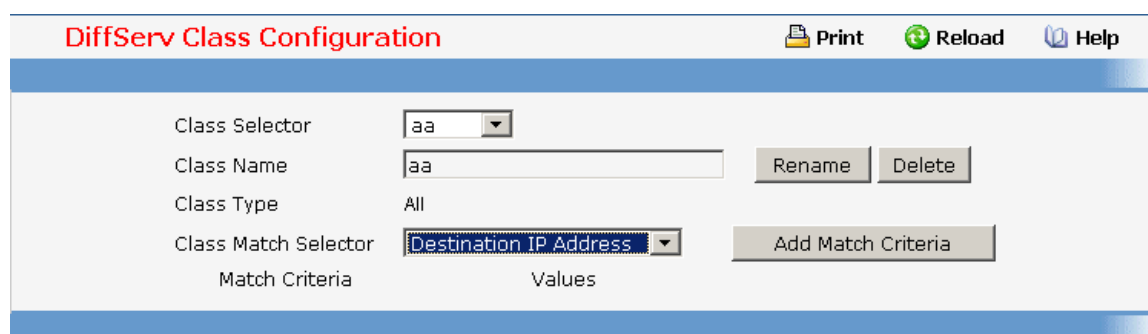

The screenshot shows the 'DiffServ Class Configuration' window. It has a title bar with 'Print', 'Reload', and 'Help' icons. The main area contains the following fields and buttons:

Class Selector	aa	
Class Name	aa	Rename Delete
Class Type	All	
Class Match Selector	Destination IP Address	Add Match Criteria
Match Criteria	Values	


11.2.5.2.3. Viewing DiffServ Class Summary Page

Non-Configurable Data

Class Name - Displays names of the configured DiffServ classes.

Class Type - Displays types of the configured classes as 'all', 'any', or 'acl'. Class types are platform dependent.

Reference Class/ACL Number - Displays name of the configured class of type 'all' or 'any' referenced by the specified class of the same type. For the specified class type of 'acl', the ACL number attached to the specified class is displayed.

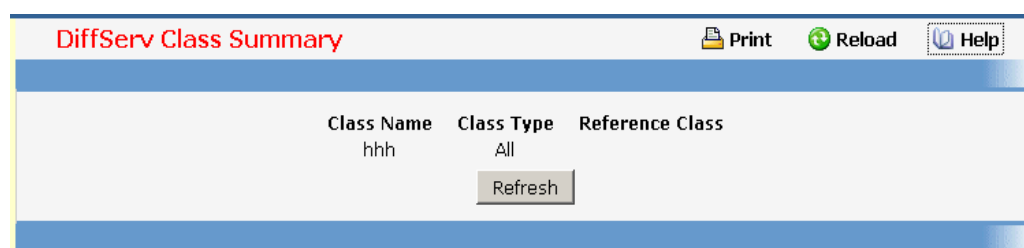

The screenshot shows the 'DiffServ Class Summary' window. It has a title bar with 'Print', 'Reload', and 'Help' icons. The main area contains a table with the following data:

Class Name	Class Type	Reference Class
hhh	All	

Below the table is a 'Refresh' button.

11.2.5.2.4. DiffServ Policy Configuration Page

Selection Criteria

Policy Selector - Along with an option to create a new policy, this lists all the existing DiffServ policy names, from which one can be selected. The content of this screen varies

based on the selection of this field. If an existing policy is selected then the screen will display Member Classes for that DiffServ policy. If 'create' is selected, another screen appears to facilitate creation of a new policy. The default is 'create'.

Policy Type - *In* indicates the type is specific to inbound traffic direction. Only when a new policy is created, this field is a selector field. After policy creation this becomes a non-configurable field displaying the configured policy type.

Available Class List - This lists all existing DiffServ class names, from which one can be selected. This field is a selector field only when a new policy class instance is to be created. After creation of the policy class instance this becomes a non-configurable field.

Member Class List - This lists all existing DiffServ classes currently defined as members of the specified Policy, from which one can be selected. This list is automatically updated as a new class is added to or removed from the policy. This field is a selector field only when an existing policy class instance is to be removed. After removal of the policy class instance this becomes a non-configurable field.

Configurable Data

Policy Name - This is a case-sensitive alphanumeric string from 1 to 31 characters uniquely identifying a policy.

Non-Configurable Data

Policy Type - *In* indicates the type is specific to inbound traffic direction. Only when a new policy is created, this field is a selector field. After policy creation this becomes a non-configurable field displaying the configured policy type.

Member Class List - Displays all the member classes for the selected DiffServ policy. It is automatically updated as a new class is added to or removed from the policy. Only when an existing policy class instance is to be removed, is this field a selector field. After removal of the policy class instance this becomes a non-configurable field.

Available Class List - Displays all the member classes for the specified policy. It is automatically updated as a new class is added to or removed from the policy. Only when a new policy class instance is to be created is this field a selector field. After creation of the policy class instance this becomes a non-configurable field.

The screenshot shows a web browser window titled "DiffServ Policy Configuration". At the top right are three icons: a printer for "Print", a circular arrow for "Reload", and a question mark for "Help". The main content area has a light blue background and contains the following fields and controls:

- Policy Selector:** A dropdown menu with "hello" selected.
- Policy Name:** A text input field containing "hello". To its right are "Rename" and "Delete" buttons.
- Policy Type:** A text field containing "In".
- Available Class List:** A text field containing "No Classes to Add".
- Member Class List:** A dropdown menu with "hhh" selected. To its right is a "Remove Selected Class" button.


11.2.5.2.5. Viewing DiffServ Policy Summary Page

Non-Configurable Data

Policy Name - Displays name of the DiffServ policy.

Policy Type - Displays type of the policy as 'In'.

Member Classes - Displays name of each class instance within the policy.

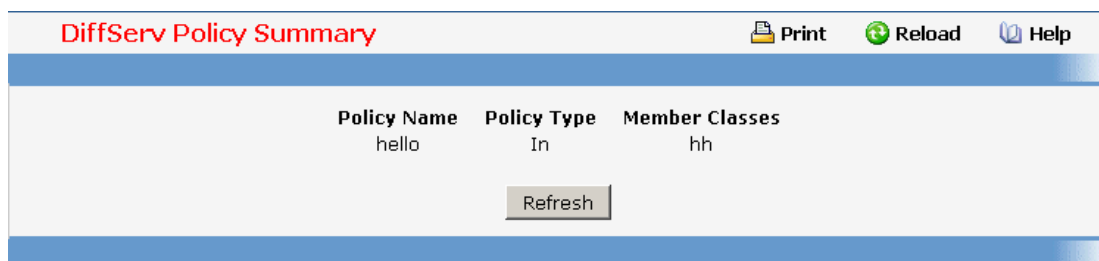

DiffServ Policy Summary Print Reload Help

Policy Name	Policy Type	Member Classes
hello	In	hh

Refresh

11.2.5.2.6. Configuring DiffServ Policy Class Definition Page

Selection Criteria


Policy Selector - This lists all the existing DiffServ policy names, from which one can be selected.

Member Class List - This lists all existing DiffServ classes currently defined as members of the specified Policy, from which one can be selected. This list is automatically updated as a new class is added to or removed from the policy.

Policy Attribute Selector - This lists all attributes supported for this type of policy, from which one can be selected.

Non-Configurable Data

Policy Type - Displays type of the configured policy as 'In'.

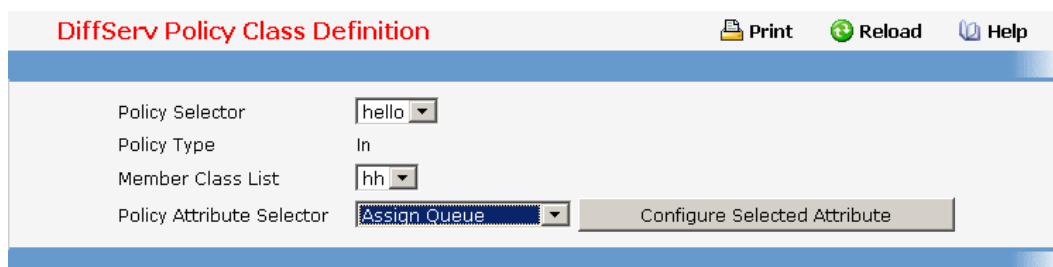

DiffServ Policy Class Definition Print Reload Help

Policy Selector:

Policy Type:

Member Class List:

Policy Attribute Selector: Configure Selected Attribute

11.2.5.2.7. Viewing DiffServ Policy Attribute Summary Page

Non-Configurable Data

Policy Name - Displays name of the specified DiffServ policy.

Policy Type - Displays type of the specified policy as 'In' or 'Out'.

Class Name - Displays name of the DiffServ class to which this policy is attached.

Attribute - Displays the attributes attached to the policy class instances.

Attribute Details - Displays the configured values of the attached attributes.

Command Buttons

Refresh - Refresh the displayed data.

Policy Name	Policy Type	Class Name	Attribute	Attribute Details
hello	In	hh	None	Best Effort will be used

Refresh

11.2.5.2.8. Configuring DiffServ Service Configuration Page

Selection Criteria

Slot/Port - Select the Slot/Port that uniquely specifies an interface. This is a list of all valid slot number and port number combinations in the system. For Read/Write users where 'All' appears in the list, select it to specify all interfaces.

Direction - Select the traffic direction of this service interface. This selection is only available to Read/Write users when Slot/Port is specified as 'All'.

Configurable Data

Policy In - This lists all the policy names of type 'In' from which one can be selected. If 'none' is selected, this will detach the policy from the interface in this direction. This field is not shown for Read/Write users where inbound service policy attachment is not supported by the platform.

Non-Configurable Data

This information is only displayed when Slot/Port is specified as 'All'.

Unit/Slot/Port - Shows the Unit/Slot/Port that uniquely specifies an interface.

Direction - Shows the traffic direction of this service interface.

Oper. Status - Shows the operational status of this service interface, either Up or Down.

Policy Name - Shows the name of the attached policy.

Unit/Slot/Port: 1/0/1

Policy In: None

Submit

11.2.5.2.9. Viewing DiffServ Service Summary Page





Non-Configurable Data

Slot/Port - Shows the Slot/Port that uniquely specifies an interface.

Direction - Shows the traffic direction of this service interface, either In or Out.

Oper. Status - Shows the operational status of this service interface.

Policy Name - Shows the name of the attached policy.

DiffServ Service Summary			
  			
Slot/Port	Direction	Operational Status	Policy Name
0/2	In	Down	hello
			

11.2.5.2.10. Viewing DiffServ Service Statistics Page

This screen displays service-level statistical information in tabular form for all interfaces in the system to which a DiffServ policy has been attached in the inbound and/or outbound traffic directions. Use the 'Counter Mode Selector' to specify the counter display mode as either octets or packets (the default).

Selection Criteria





Counter Mode Selector - Specifies the format of the displayed counter values, which must be either Octets or Packets. The default is 'Packets'.

Non-Configurable Data

Slot/Port - Shows the Slot/Port that uniquely specifies an interface.

Direction - Shows the traffic direction of this service interface.

Operational Status - Shows the operational status of this service interface, either Up or Down.

DiffServ Service Statistics		
  		
Unit/Slot/Port	Direction	Operational Status
1/0/1	In	Down
		

11.2.5.2.11. Viewing DiffServ Service Detailed Statistics Page

This screen displays class-oriented statistical information for the policy, which is specified by the interface and direction. The 'Member Classes' drop down list is populated on the basis of the specified interface and direction and hence the attached policy (if any). Highlighting a member class name displays the statistical information for the policy-class instance for the specified interface and direction.

Selection Criteria

Counter Mode Selector - Specifies the format of the displayed counter values, which must be either Octets or Packets. The default is 'Packets'.

Slot/Port - List of all valid slot number and port number combinations in the system that have a DiffServ policy currently attached (in either direction), from which one can be chosen.


Direction - List of the traffic direction of interface. Only shows the direction(s) for which a DiffServ policy is currently attached.

Member Classes - List of all DiffServ classes currently defined as members of the selected Policy Name. Choose one member class name at a time to display its statistics. If no class is associated with the chosen policy then nothing will be populated in the list.

Non-Configurable Data

Policy Name - Name of the policy currently attached to the specified interface and direction.

Operational Status - Operational status of the policy currently attached to the specified interface and direction. The value is either Up or Down.

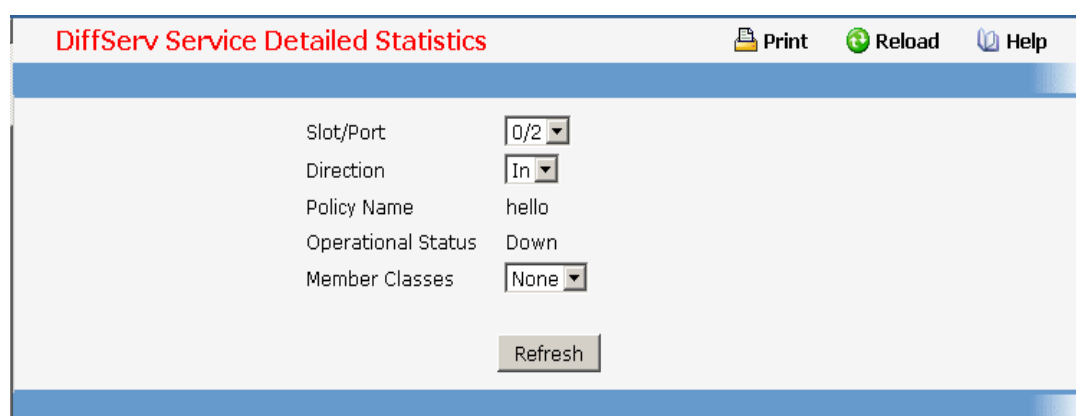

Slot/Port	0/2
Direction	In
Policy Name	hello
Operational Status	Down
Member Classes	None

Refresh

11.2.5.3 Configuring Diffserv Wizard Page

Operation

The DiffServ Wizard enables DiffServ on the switch by creating a traffic class, adding the traffic class to a policy, and then adding the policy to the ports selected on DiffServ Wizard page. The DiffServ Wizard will:

Create a DiffServ Class and define match criteria used as a filter to determine if incoming traffic meets the requirements to be a member of the class.

Set the DiffServ Class match criteria based on Traffic Type selection as below:

VOIP - sets match criteria to UDP protocol.

HTTP - sets match criteria to HTTP destination port.

FTP - sets match criteria to FTP destination port.

Telnet - sets match criteria to Telnet destination port.

Any - sets match criteria to all traffic.

Create a DiffServ Policy and adds the DiffServ Policy to the DiffServ Class created.

If Policing is set to YES, then DiffServ Policy style is set to Simple. Traffic which conforms to the Class Match criteria will be processed according to the Outbound Priority selection. Outbound Priority configures the handling of conforming traffic as below:

High - sets policing action to markdscp ef.

Med - sets policing action to markdscp af31.

Low - sets policing action to send.

If Policing is set to NO, then all traffic will be marked as specified below:

High - sets policy mark ipdscp ef.

Med - sets policy mark ipdscp af31.

Low - sets policy mark ipdscp be.

Each port selected will be added to the policy created.

Selection Criteria

Traffic Type - Traffic type is used to define the DiffServ Class. Traffic type options: VOIP, HTTP, FTP, Telnet, and Any.

Ports - List the ports which can be configured to support a DiffServ policy. The DiffServ policy will be added to selected ports.

Policing - Enabling policing will add policing to the DiffServ Policy and the policing rate will be applied.

Committed Rate - When Policing is enabled, the committed rate will be applied to the policy and the policing action is set to conform. When Policing is disabled, the committed rate is not applied and the policy is set to markdscp.

Outbound Priority - When Policing is enabled, Outbound Priority defines the type of policing conform action where: High sets action to markdscp ef, Med sets action to markdscp af31, and Low sets action to send. When Policing is disabled, Outbound Priority defines the policy where: High sets policy to mark ipdscp ef, Med sets policy to mark ipdscp af31, Low set policy to mark ipdscp be.

The screenshot shows the 'DiffServ Wizard' configuration window. At the top, there are buttons for 'Print', 'Reload', and 'Help'. The main configuration area includes the following fields:

- Traffic Type:** A dropdown menu currently set to 'VOIP'.
- Ports to Include in Config:** A list box containing port ranges from '0/1' to '0/10'.
- Policing:** A dropdown menu set to 'YES'.
- Committed Rate:** A text input field containing '1', followed by '(1 - 4294967295)Kbps'.
- Outbound Priority:** A dropdown menu set to 'High'.
- Submit:** A button at the bottom of the configuration area.

11.2.5.4 Managing Class of Service

11.2.5.4.1. Managing Table Configuration Page

Selection Criteria

Unit/Slot/Port - Specifies all CoS configurable interfaces. The option "Global" represents the most recent global configuration settings. These may be overridden on a per-interface basis.

Configurable Data

Interface Trust Mode - Specifies whether or not to trust a particular packet marking at ingress.

Interface Trust Mode can only be one of the following:

- ***untrusted***
- ***trust dot1p***
- ***trust ip-precedence***

Default value is trust dot1p.

IP Precedence Traffic Class - Specify which internal traffic class to map the corresponding IP Precedence value. Valid Range is (0 to 6) .

Non-Configurable Data

Untrusted Traffic Class - Displays traffic class (i.e. queue) to which all traffic is directed when in 'untrusted' mode. Valid Range is (0 to 6).

Non-IP Traffic Class - Displays traffic class (i.e. queue) to which all non-IP traffic is directed when in 'trust ip-precedence' or 'trust ip-dscp' mode. Valid Range is (0 to 6).

802.1p Priority - Displays the 802.1p priority to be mapped.

IP Precedence Value - Displays IP Precedence value. Valid Range is (0 to 7).

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Restore Defaults - Restores default settings.

CoS Mapping Table Configuration

Print
Reload
Help

Unit/Slot/Port
1/0/1

Interface Trust Mode
trust dot1p

IP Precedence Value	Traffic Class
0	1
1	0
2	0
3	1
4	2
5	2
6	3
7	3

Submit
Restore Defaults

802.1p Priority	Traffic Class
0	1
1	0
2	0
3	1
4	2
5	2
6	3
7	3

*In order to map Traffic class with dot1p go to Switching-->Class of service-->801.1p Priority Mapping

11.2.5.4.2. Configuring CoS interface

Selection Criteria

Unit/Slot/Port - Specifies all CoS configurable interfaces. The option "Global" represents the most recent global configuration settings. These may be overridden on a per-interface basis.


Configurable Data

Interface Shaping Rate - Specifies the maximum bandwidth allowed, typically used to shape the outbound transmission rate. This value is controlled independently of any per-queue maximum bandwidth configuration. It is effectively a second-level shaping mechanism. Default value is 0. Valid Range is (0 to 100) in increments of 5 . The value 0 means maximum is unlimited.

Command Buttons

Restore Defaults - Restores default settings.

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

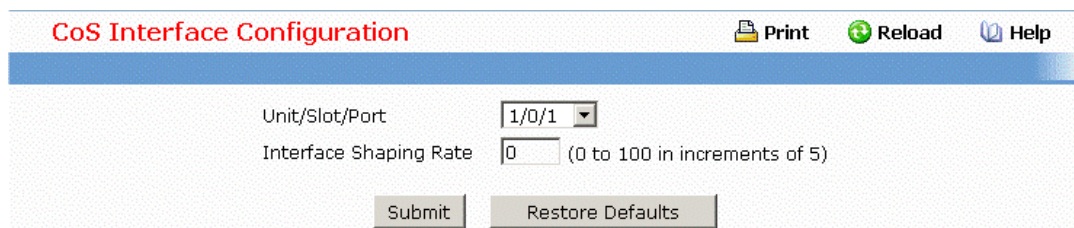

CoS Interface Configuration

Unit/Slot/Port: 1/0/1

Interface Shaping Rate: 0 (0 to 100 in increments of 5)

Submit Restore Defaults

11.2.5.4.3. Configuring CoS interface queue

Selection Criteria

Unit/Slot/Port - Specifies all CoS configurable interfaces. The option "Global" represents the most recent global configuration settings. These may be overridden on a per-interface basis.

Queue ID - Specifies all the available queues per interface(platform based).

Configurable Data

Minimum Bandwidth Allocated - Specifies the sum of individual Minimum Bandwidth values for all queues in the interface. The sum cannot exceed the defined maximum (100). This value is considered while configuring the Minimum Bandwidth for a queue in the selected interface.

Minimum Bandwidth - Specifies the minimum guaranteed bandwidth allotted to this queue. Setting this value higher than its corresponding Maximum Bandwidth automatically increases the maximum to the same value. Default value is 0. Valid Range is (0 to 100) in increments of 5 . The value 0 means no guaranteed minimum. Sum of individual Minimum Bandwidth values for all queues in the selected interface cannot exceed defined maximum (100).

Scheduler Type - Specifies the type of scheduling used for this queue. Scheduler Type can only be one of the following:

- ***strict***
- ***weighted***

Default value is weighted.

Queue Management Type - Queue depth management technique used for queues on this interface. This is only used if device supports independent settings per-queue. Queue Management Type can only be:

- ***taildrop***

Default value is taildrop.

Command Buttons

Restore Defaults for All Queues - Restores default settings for all queues on the selected interface.

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

The screenshot shows a web interface titled "CoS Interface Queue Configuration". At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". The main configuration area contains the following fields:

- Unit/Slot/Port: A dropdown menu showing "1/0/1".
- Minimum Bandwidth Allocated: A text input field containing "0".
- Queue ID: A dropdown menu showing "0".
- Minimum Bandwidth: A text input field containing "0", with a note "(0 to 100 in increments of 5)".
- Scheduler Type: A dropdown menu showing "weighted".
- Queue Management Type: A dropdown menu showing "taildrop".

At the bottom of the form, there are two buttons: "Restore Defaults for All Queues" and "Submit".

11.2.5.4.4. Viewing CoS interface queue status

Selection Criteria

Unit/Slot/Port - Specifies all CoS configurable interfaces. The option "Global" represents the most recent global configuration settings. These may be overridden on a per-interface basis.

Non-Configurable Data

Queue ID - Specifies the queueID.




Minimum Bandwidth - Specifies the minimum guaranteed bandwidth allotted to this queue. The value 0 means no guaranteed minimum. Sum of individual Minimum Bandwidth values for all queues in the selected interface cannot exceed defined maximum (100).

Scheduler Type - Specifies the type of scheduling used for this queue. Scheduler Type can only be one of the following:

- ***strict***
- ***weighted***

Queue Management Type - Queue depth management technique used for queues on this interface. This is only used if device supports independent settings per-queue. Queue Management Type can only be one of the following:

- ***taildrop***

CoS Interface Queue Status				
<div>  Print  Reload  Help </div>				
Unit/Slot/Port 1/0/1				
Queue ID	Minimum Bandwidth	Scheduler Type	Queue Management Type	
0	0	weighted	taildrop	
1	0	weighted	taildrop	
2	0	weighted	taildrop	
3	0	weighted	taildrop	
4	0	weighted	taildrop	
5	0	weighted	taildrop	
6	0	weighted	taildrop	

11.2.6 IP Multicast Menu

11.2.6.1 Managing DVMRP Protocol

11.2.6.1.1. Configuring DVMRP Global Configuration Page

Configurable Data

Admin Mode - Select enable or disable from the dropdown menu. This sets the administrative status of DVMRP to active or inactive. The default is disable.

Non-Configurable Data

Version - The current value of the DVMRP version string.

Total Number of Routes - The number of routes in the DVMRP routing table.

Reachable Routes - The number of routes in the DVMRP routing table that have a non-infinite metric.

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

DVMRP Global Configuration Print Reload Help

Admin Mode

Version 3

Total Number of Routes 0

Reachable Routes 0

Controller time: 2000/6/25 10:51:15

11.2.6.1.2. Configuring DVMRP Interface Configuration Page

Selection Criteria

Unit/Slot/Port - Select the interface for which data is to be configured. You must configure at least one router interface before you configure a DVMRP interface. Otherwise you will see a message telling you that no router interfaces are available, and the configuration screen will not be displayed.

Configurable Data

Interface Mode - Select enable or disable from the pull-down menu to set the administrative mode of the selected DVMRP routing interface.

Interface Metric - Enter the DVMRP metric for the selected interface. This value is sent in DVMRP messages as the cost to reach this network. Valid values are from (1 to 31).

Command Buttons

Submit - Send the updated configuration to the switch. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

DVMRP Interface Configuration Print Reload Help

Unit/Slot/Port

Interface Mode

Interface Metric (1 to 31)

Controller time: 2000/6/25 10:32:5

11.2.6.1.3. Viewing DVMRP Configuration Summary

Selection Criteria

- **Unit/Slot/Port** - Select the interface for which data is to be displayed. You must configure at least one router interface before you can display data for a DVMRP interface. Otherwise you will see a message telling you that no router interfaces are available, and the configuration summary screen will not be displayed.

Non-Configurable Data

Interface Mode - The administrative mode of the selected DVMRP routing interface, either enable or disable.

Protocol State - The operational state of the DVMRP protocol on the selected interface, either operational or non-operational.

Local Address - The IP address used as a source address in packets sent from the selected interface.

Interface Metric - The metric used to calculate distance vectors for the selected interface.

Generation ID - The DVMRP generation ID used by the router for the selected interface. This value is reset every time an interface is (re)started and is placed in prune messages. A change in generation ID informs the neighbor routers that any previous information about this router should be discarded.

Received Bad Packets - The number of invalid packets received on the selected interface.

Received Bad Routes - The number of invalid routes received on the selected interface.

Sent Routes - The number of routes sent on the selected interface.

Neighbor IP - The IP address of the neighbor whose information is displayed.

State - The state of the specified neighbor router on the selected interface, either active or down.

Neighbor Uptime - The DVMRP uptime for the specified neighbor on the selected interface. This is the time since the neighbor entry was learned.

Neighbor Expiry Time - The DVMRP expiry time for the specified neighbor on the selected interface. This is the time left before this neighbor entry will age out, and is not applicable if the neighbor router's state is down.

Generation ID - The DVMRP generation ID for the specified neighbor on the selected interface.

Major Version - The DVMRP Major Version for the specified neighbor on the selected interface.

Minor Version - The DVMRP Minor Version for the specified neighbor on the selected interface.

Capabilities - The DVMRP capabilities of the specified neighbor on the selected interface.

Received Routes - The number of routes received for the specified neighbor on the selected interface.

Received Bad Packets - The number of invalid packets received for the specified neighbor on the selected interface.

Received Bad Routes - The number of invalid routes received for the specified neighbor on the selected interface.

Command Buttons

Refresh - Refresh the screen with the new data.

DVMRP Configuration Summary Print Reload Help

Unit/Slot/Port:

Interface Parameters

Interface Mode	Disable
Protocol State	Non-Operational
Local Address	0.0.0.0
Interface Metric	1

Interface Statistics

Generation ID	
Received Bad Packets	0
Received Bad Routes	0
Sent Routes	0

Neighbor Parameters

No Neighbor Parameters

11.2.6.1.4. Viewing DVMRP Next Hop Configuration Summary

Non-Configurable Data

Source IP - The IP address used with the source mask to identify the source network for this table entry.


Source Mask - The network mask used with the source IP address.

Next Hop Interface - The outgoing interface for this next hop.

Type - The next hop type. 'Leaf' means that no downstream dependent neighbors exist on the outgoing interface. Otherwise, the type is 'branch'.

Command Buttons

Refresh - Refresh the screen with the new data

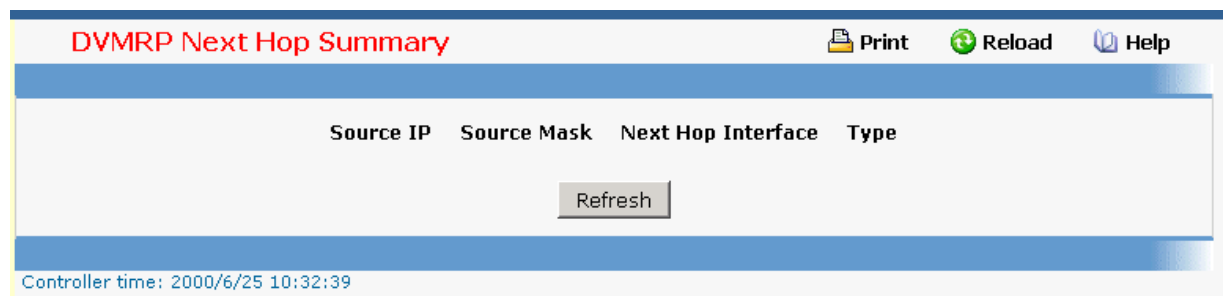

11.2.6.1.5. Viewing DVMRP Prune Summary

Non-Configurable Data

Group IP - The group address which has been pruned.


Source IP - The address of the source or source network which has been pruned.

Source Mask - The subnet mask to be combined with the source IP address to identify the source or source network which has been pruned.

Expiry Time - The amount of time remaining before this prune should expire at the upstream neighbor. If no prune messages have been received from downstream neighbors, this is set to value of the default prune lifetime timer, otherwise it is set to the smallest received value or the default timer, whichever is less.

Command Buttons

Refresh - Refresh the screen with the new data

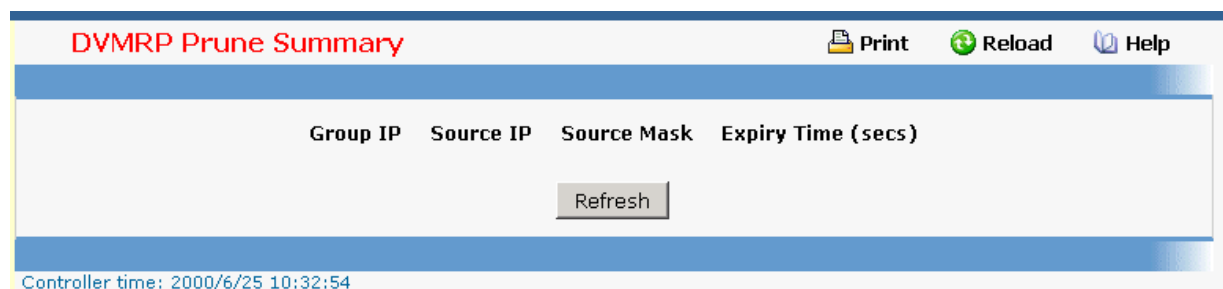

11.2.6.1.6. Viewing DVMRP Route Summary

Non-Configurable Data

Source Address - The network address that is combined with the source mask to identify the sources for this entry.

Source Mask - The subnet mask to be combined with the source address to identify the sources for this entry.

Upstream Neighbor - The address of the upstream neighbor (e.g., RPF neighbor) from which IP datagrams from these sources are received.

Interface - The interface on which IP datagrams sent by these sources are received. A value of 0 typically means the route is an aggregate for which no next-hop interface exists.


Metric - The distance in hops to the source subnet.

Expiry Time - The minimum amount of time remaining before this entry will be aged out.

Up Time - The time since the route represented by this entry was learned by the router.

Command Buttons

Refresh - Refresh the screen with the new data

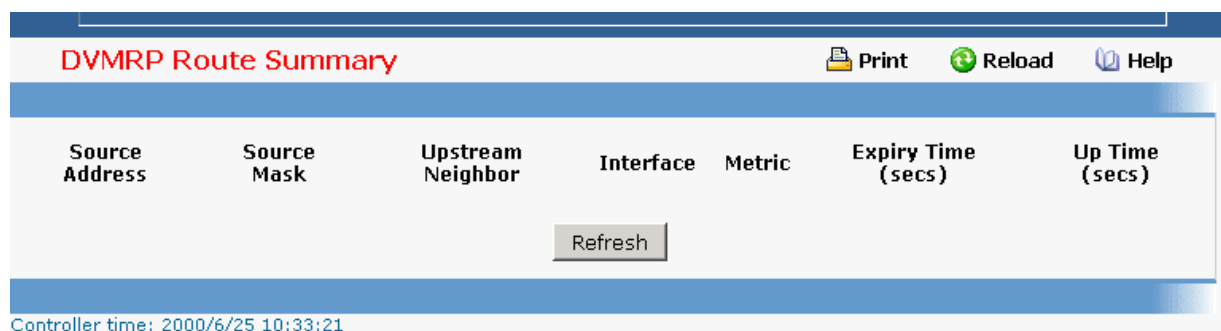

Source Address	Source Mask	Upstream Neighbor	Interface	Metric	Expiry Time (secs)	Up Time (secs)
<div>Refresh</div>						

Controller time: 2000/6/25 10:33:21

11.2.6.2 Managing IGMP Protocol


11.2.6.2.1. Configuring IGMP Global Configuration Page

Configurable Data

Admin Mode - Select enable or disable from the pulldown menu to set the administrative status of IGMP in the router to active or inactive. The default is disable.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

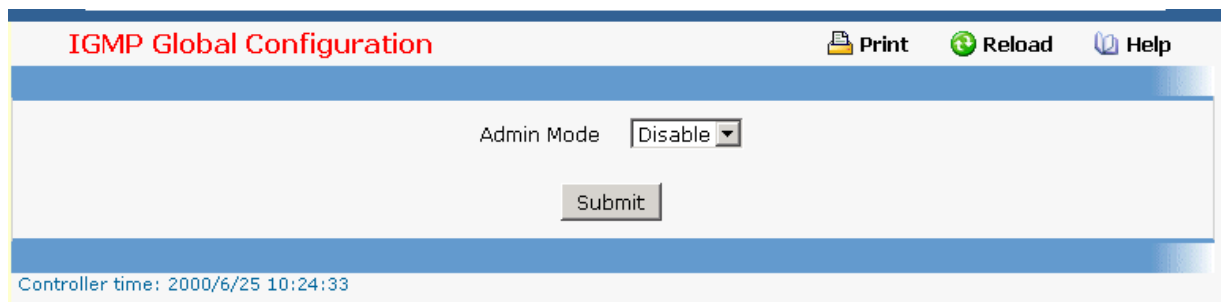

11.2.6.2.2. Configuring IGMP Interface Configuration Page

Selection Criteria

Unit/Slot/Port - Select the slot and port for which data is to be displayed or configured from the pulldown menu. Slot 0 is the base unit. You must have configured at least one router interface before configuring or displaying data for an IGMP interface, otherwise an error message will be displayed.

Configurable Data

Interface Mode - Select enable or disable from the pulldown menu to set the administrative status of IGMP on the selected interface. The default is disable.

Version - Enter the version of IGMP you want to configure on the selected interface. Valid values are 1 to 3 and the default value is 3.

Robustness - Enter the robustness value. This variable allows tuning for the expected packet loss on a subnet. If you expect the subnet to be lossy, you should enter a higher number for this parameter. IGMP is robust to (robustness variable-1) packet losses. Valid values are from 1 to 255. The default value is 2.

Query Interval - Enter the frequency in seconds at which IGMP host-query packets are to be transmitted on this interface. Valid values are from 1 to 3600. The default value is 125.

Query Max Response Time - Enter the maximum query response time to be advertised in IGMPv2 queries on this interface, in tenths of a second. The default value is 100. Valid values are from (0 to 255) .

Startup Query Interval - Enter the number of seconds between the transmission of startup queries on the selected interface. The valid values are from 1 to 300. The default value is 31.

Startup Query Count - Enter the number of queries to be sent on startup. The valid values are from 1 to 20. The default value is 2.

Last Member Query Interval - Enter the last member query interval in tenths of a second. This is the maximum response time to be inserted into group-specific queries sent in response to leave group messages, and is also the amount of time between group-specific query messages. Valid values are from 0 to 255. The default value is 10. This value is not used for IGMP version 1.

Last Member Query Count - Enter the number of queries to be sent on receiving a leave group report. Valid values are from 1 to 20. The default value is 2.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

IGMP Interface ConfigurationPrintReloadHelp

Unit/Slot/Port	<input type="text" value="1/0/1"/>
Interface Mode	<input type="text" value="Disable"/>
Version	<input type="text" value="3"/> (1 to 3)
Robustness	<input type="text" value="2"/> (1 to 255)
Query Interval (secs)	<input type="text" value="125"/> (1 to 3600)
Query Max Response Time (1/10 of a second)	<input type="text" value="100"/> (0 to 255)
Startup Query Interval (secs)	<input type="text" value="31"/> (1 to 300)
Startup Query Count	<input type="text" value="2"/> (1 to 20)
Last Member Query Interval (1/10 of a second)	<input type="text" value="10"/> (0 to 255)
Last Member Query Count	<input type="text" value="2"/> (1 to 20)

Submit

Controller time: 2000/6/25 10:29:45

11.2.6.2.3. Viewing IGMP Configuration Summary

Selection Criteria

Unit/Slot/Port - Select the slot and port for which data is to be displayed. Slot 0 is the base unit.

Non-Configurable Data

Interface Mode - The administrative status of IGMP on the selected interface.

IP Address - The IP address of the selected interface.

Subnet Mask - The subnet mask for the IP address of the selected interface.

Protocol State - The operational state of IGMP on the selected interface.

Version - The version of IGMP configured on the selected interface.

Query Interval - The frequency at which IGMP host-query packets are transmitted on the selected interface.

Query Max Response Time - The maximum query response time advertised in IGMPv2 queries sent from the selected interface.

Robustness - The robustness parameter for the selected interface. This variable allows tuning for the expected packet loss on a subnet. If a subnet is expected to be lossy, the robustness variable may be increased. IGMP is robust to (robustness variable-1) packet losses.

Startup Query Interval - The interval at which startup queries are sent on the selected interface.

Startup Query Count - The number of queries to be sent on startup.

Last Member Query Interval - The last member query interval. The last member query interval is the maximum response time inserted into group-specific queries sent in response to leave group messages, and is also the amount of time between group-specific query messages. This value may be tuned to modify the leave latency of the network. A reduced value results in reduced time to detect the loss of the last member of a group. This value is not used for IGMP version 1.

Last Member Query Count - The number of queries to be sent on receiving a leave group report.

Querier - The address of the IGMP querier on the IP subnet to which the selected interface is attached.

Querier Status - Indicates whether the selected interface is in querier or non querier mode.

Querier Up Time - The time in seconds since the IGMP interface querier was last changed.

Querier Expiry Time - The time in seconds remaining before the other querier present timer expires. If the local system is the querier, this will be zero.

Wrong Version Queries - The number of queries that have been received on the selected interface with an IGMP version that does not match the IGMP version configured for the interface, over the lifetime of the entry. IGMP requires that all routers on a LAN be configured to run the same version of IGMP. Therefore, a configuration error is indicated if any queries are received with the wrong version number.

Number of Joins - The number of times a group membership has been added on the selected interface; that is, the number of times an entry for this interface has been added to the cache table. This gives an indication of the amount of IGMP activity on the interface.

Number of Groups - The current number of entries for the selected interface in the cache table.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

Unit/Slot/Port 1/0/1

Interface Parameters

Interface Mode	Disable
IP Address	10.1.2.10
Subnet Mask	255.255.255.0
Protocol State	Non-Operational
Version	3
Query Interval (secs)	125
Query Max Response Time (1/10 of a second)	100
Robustness	2
Startup Query Interval (secs)	31
Startup Query Count	2
Last Member Query Interval (1/10 of a second)	10
Last Member Query Count	2

Interface Statistics

Querier

11.2.6.2.4. Viewing IGMP Cache Information

Selection Criteria

Unit/Slot/Port - Select the Slot and port for which data is to be displayed. Slot 0 is the base unit.

Multicast Group IP - Select the IP multicast group address for which data is to be displayed. If no group membership reports have been received on the selected interface you will not be able to make this selection, and none of the non-configurable data will be displayed.

Non-Configurable Data

Last Reporter - The IP address of the source of the last membership report received for the IP Multicast group address on the selected interface.

Up Time - The time elapsed since this entry was created.

Expiry Time - The minimum amount of time remaining before this entry will be aged out.

Version 1 Host Timer - The time remaining until the local router will assume that there are no longer any IGMP version 1 members on the IP subnet attached to this interface. When an IGMPv1 membership report is received, this timer is reset to the group membership

timer. While this timer is non-zero, the local router ignores any IGMPv2 leave messages for this group that it receives on the selected interface. This field is displayed only if the interface is configured for IGMP version 1.


Version 2 Host Timer - The time remaining until the local router will assume that there are no longer any IGMP version 2 members on the IP subnet attached to this interface. When an IGMPv2 membership report is received, this timer is reset to the group membership timer. While this timer is non-zero, the local router ignores any IGMPv1 and IGMPv3 leave messages for this group that it receives on the selected interface. This field is displayed only if the interface is configured for IGMP version 2.

Compatibility - This parameter shows group compatibility mode (v1, v2 and v3) for this group on the specified interface.

Filter Mode - The source filter mode (Include/Exclude/NA) for the specified group on this interface. When NA mode is active the field is blank

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

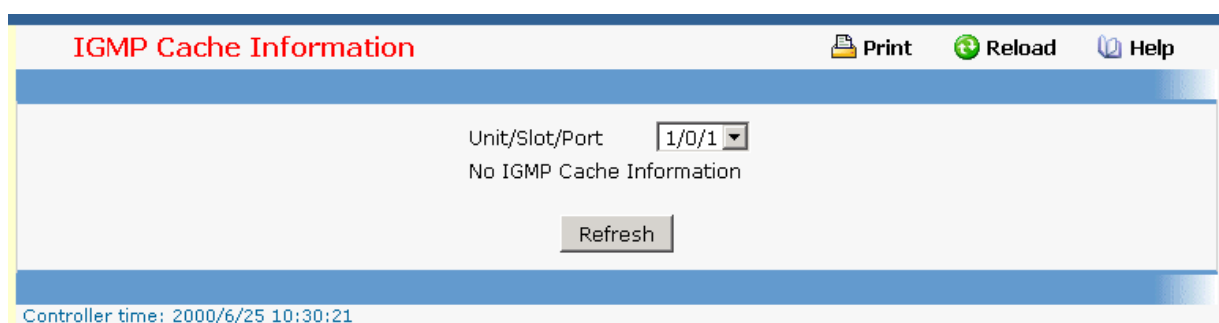

The screenshot shows a web interface titled "IGMP Cache Information". At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". Below the title bar, there is a dropdown menu labeled "Unit/Slot/Port" with the value "1/0/1" selected. Below the dropdown, the text "No IGMP Cache Information" is displayed. A "Refresh" button is located below the text. At the bottom left of the interface, the text "Controller time: 2000/6/25 10:30:21" is shown.

11.2.6.2.5. Viewing IGMP Interface Membership Details Information

Selection Criteria

Unit/Slot/Port - Select the Slot and port for which data is to be displayed. Slot 0 is the base unit.

Multicast Group IP - Select the IP multicast group address for which data is to be displayed. If no group membership reports have been received on the selected interface you will not be able to make this selection, and none of the non-configurable data will be displayed.

Non-Configurable Data

Interface - This parameter shows the interface on which multicast packets are forwarded.

Group Compatibility Mode - This parameter shows group compatibility mode (v1, v2 and v3) for this group on the specified interface.

Source Filter Mode - The source filter mode (Include/Exclude/NA) for the specified group on this interface.

Source Hosts - This parameter shows source addresses which are members of this multicast address.

Expiry Time - This parameter shows expiry time interval against each source address which are members of this multicast group. This is the amount of time after which the specified source entry is aged out.

IGMP Interface Detailed Membership Info

Unit/Slot/Port: 1/0/1

No IGMP Cache Information

Refresh

Controller time: 2000/6/25 10:30:35

11.2.6.3 Defining Multicast Configuration

11.2.6.3.1. Configuring Multicast Global Configuration Page

Selection Criteria

Admin Mode - Select enable or disable to set the administrative status of Multicast Forwarding in the router. The default is disabled.

Non-Configurable Data

Protocol State - The operational state of the multicast forwarding module.

Table Maximum Entry Count - The maximum number of entries in the IP Multicast routing table.

Number Of Packets For Which Source Not Found - The number of multicast packets that were supposed to be routed but which failed the RPF check.

Number Of Packets For Which Group Not Found - The number of multicast packets that were supposed to be routed but for which no multicast route was found.

Protocol - The multicast routing protocol presently activated on the router, if any.

Table Entry Count - The number of multicast route entries currently present in the Multicast route table.

Table Highest Entry Count - The highest number of multicast route entries that have been present in the Multicast route table.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Multicast Global Configuration	
Admin Mode	Disable
Protocol State	Non-Operational
Table Maximum Entry Count	256
Number of Packets For Which Source Not Found	0
Number of Packets For Which Group Not Found	0
Protocol	No Protocol Enabled
Forwarding Multicast Stream Table Entry Count	0
Table Highest Entry Count	0

11.2.6.3.2. Configuring Interface's Multicast Configuration Page

Selection Criteria

Unit/Slot/Port - Select the routing interface you want to configure from the dropdown menu.

Configurable Data

TTL Threshold - Enter the TTL threshold below which a multicast data packet will not be forwarded from the selected interface. You should enter a number between 0 and 255. If you enter 0 all multicast packets for the selected interface will be forwarded. You must configure at least one router interface before you will see this field.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Multicast Interface Configuration	
Unit/Slot/Port	1/0/20
TTL Threshold	1 (0 to 255)

11.2.6.3.3. Viewing Multicast MRoute Summary Page

This screen displays selected contents of the Mroute Table in tabular form. If there are no routes in the table you will not be presented with the Selection Criteria.

Selection Criteria

Source IP - Enter the IP address of the multicast packet source to be combined with the

Group IP to fully identify a single route whose Mroute table entry you want to display or clear. You may leave this field blank.

Group IP - Enter the destination group IP address whose multicast route(s) you want to display or clear.

Non-Configurable Data

Incoming Interface - The incoming interface on which multicast packets for this source/group arrive.

Outgoing Interface(s) - The list of outgoing interfaces on which multicast packets for this source/group are forwarded.

Up Time - The time in seconds since the entry was created.

Expiry Time - The time in seconds before this entry will age out and be removed from the table.

RPF Neighbor - The IP address of the Reverse Path Forwarding neighbor.

Protocol - The multicast routing protocol which created this entry. The possibilities are:

PIM-DM

PIM-SM

DVMRP

Flags - The value displayed in this field is valid if the multicast routing protocol running is PIMSM. The possible values are RPT or SPT. For other protocols a "-----" is displayed.

Command Buttons

Search - Search the Mroute table for an entry matching the Source IP (if entered) and Group IP address.

Clear Route - Remove the data on the screen for the Source IP (if entered) and Group IP address you have specified.

Clear All - Remove all the data on the screen.

Refresh - Refresh the information on the screen with the present state of the data in the router.

Multicast MRoute Summary								
Source IP <input type="text"/>			Group IP <input type="text"/>		Search	Clear Route		
Source IP	Group IP	Incoming Interface	Outgoing Interfaces	Up Time (secs)	Expiry Time (secs)	RPF Neighbor	Protocol	Flags
192.168.4.54	224.3.3.3	0/2/2	1.0.20.0.2.1	20	206	192.168.5.178	PIMDM	----
192.168.8.55	239.1.1.1	0/2/1	1.0.20.0.2.2	627	206	0.0.0.0	PIMDM	----
Clear All				Refresh				

11.2.6.3.4. Configuring Multicast Static Routes Configuration Page

Selection Criteria

Source - Select Create Static Route to configure a new static entry in the MRoute table, or select one of the existing entries from the pulldown menu.

Configurable Data

Source IP - Enter the IP Address that identifies the multicast packet source for the entry you are creating.

Source Mask - Enter the subnet mask to be applied to the Source IP address.

RPF Neighbor - Enter the IP address of the neighbor router on the path to the source.


Metric - Enter the link state cost of the path to the multicast source. The range is 0 - 255 and the default is one. You can change the metric for a configured route by selecting the static route and editing this field.

Unit/Slot/Port - Select the interface number from the dropdown menu. This is the interface that connects to the neighbor router for the given source IP address.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Delete - Delete the static entry with the selected Source IP address from the MRoute table.

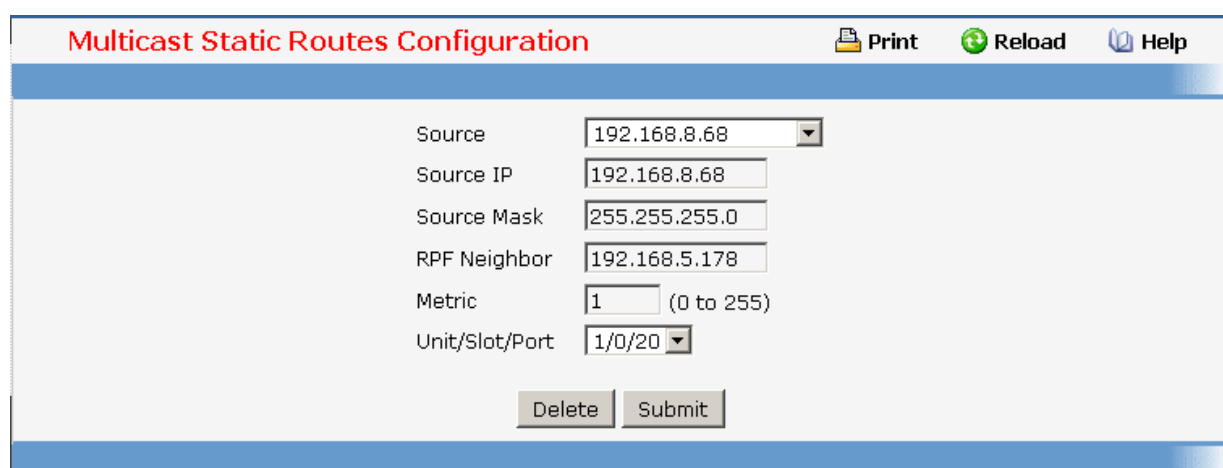

Multicast Static Routes Configuration Print Reload Help

Source: 192.168.8.68

Source IP: 192.168.8.68

Source Mask: 255.255.255.0

RPF Neighbor: 192.168.5.178

Metric: 1 (0 to 255)

Unit/Slot/Port: 1/0/20

Delete Submit

11.2.6.3.5. Viewing Multicast Static Routes Configuration Page

Non-Configurable Data

Source IP - The IP Address that identifies the multicast packet source for this route.

Source Mask - The subnet mask applied to the Source IP address.

RPF Address - The IP address of the RPF neighbor.


Metric - The link state cost of the path to the multicast source. The range is 0 - 255.


Unit/Slot/Port - The number of the incoming interface whose IP address is used as RPF for the given source IP address.


Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

Multicast Static Routes Summary

 Print

 Reload

 Help

Source IP	Source Mask	RPF Address	Metric	Unit/Slot/Port
192.168.8.68	255.255.255.0	192.168.5.178	1	1/0/20

Refresh

11.2.6.3.6. Configuring Multicast Admin Boundary Configuration Page

The definition of an administratively scoped boundary is a mechanism is a way to stop the ingress and egress of multicast traffic for a given range of multicast addresses on a given routing interface.

Selection Criteria

Group IP - Select 'Create Boundary' from the pulldown menu to create a new admin scope boundary, or select one of the existing boundary specifications to display or update its configuration.

Unit/Slot/Port - Select the router interface for which the administratively scoped boundary is to be configured.

Configurable Data

Group IP - Enter the multicast group address for the start of the range of addresses to be excluded. The address must be in the range of 239.0.0.0 through 239.255.255.255.

Group Mask - Enter the mask to be applied to the multicast group address. The combination of the mask and the Group IP gives the range of administratively scoped addresses for the selected interface.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Delete - Delete the selected administrative scoped boundary.

Multicast Admin Boundary Configuration		Print	Reload	Help
Group	239.3.4.5 - 1/0/20			
Unit/Slot/Port	1/0/20			
Group IP	239.3.4.5			
Group Mask	255.255.255.255			
Delete Submit				

11.2.6.3.7. Viewing Multicast Admin Boundary Configuration Page

Non-Configurable Data


Unit/Slot/Port - The router interface to which the administratively scoped address range is applied.

Group IP - The multicast group address for the start of the range of addresses to be excluded.

Group Mask - The mask that is applied to the multicast group address. The combination of the mask and the Group IP gives the range of administratively scoped addresses for the selected interface.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

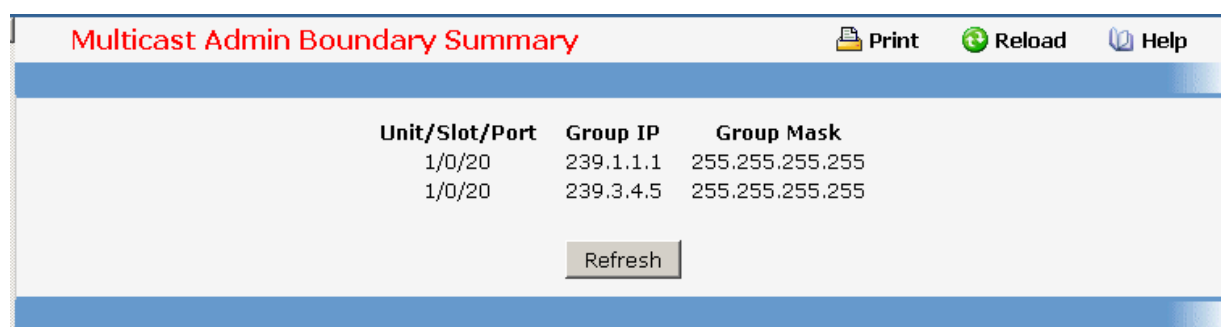

Unit/Slot/Port	Group IP	Group Mask
1/0/20	239.1.1.1	255.255.255.255
1/0/20	239.3.4.5	255.255.255.255

Refresh

11.2.6.4 Configuring Multicast Mdebug

11.2.6.4.1. Configuring Mrinfo Run Page


Use this screen to initiate an *mrinfo* command. You can use the *mrinfo* command to find out information about neighboring multicast routers. While you initiate the query using this screen, the results are displayed on the Mrinfo Show screen.

Configurable Data

Router Interface - Enter the IP address of the router interface for which you want to see the neighbor router information. If you do not enter an address the router will query itself.

Command Buttons

Submit - Initiate the *mrinfo* command on the router. If the *mrinfo* command completes successfully the browser will display the Mrinfo Show screen. If the *mrinfo* command fails, you will see the Mrinfo Run screen again.

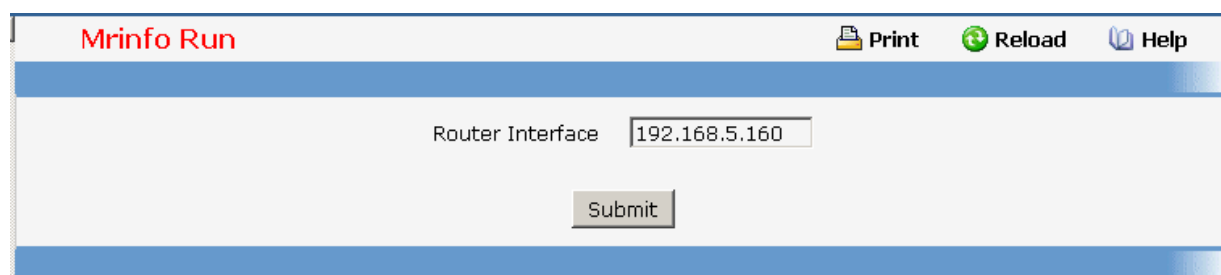

Router Interface

Submit

11.2.6.4.2. Viewing Mrinfo Summary Page

This screen displays the results of an *mrinfo* command.

Non-Configurable Data

Router Interface - The IP address of the router interface for which configuration information was requested.

Neighboring router's IP Address - The IP address of the neighboring router.

Metric - The routing metric for this router.

TTL Threshold - The time-to-live threshold on this hop.


Flags - The flags indicating whether the router is an IGMP querier or whether or not it has neighbors (leaf router).


Command Buttons


New Mrinfo - Redirect the web browser to the Mrinfo Run screen so that you can initiate another *mrinfo* command.

Refresh - Refresh the content of the screen with the latest data available on the router. Typically, it takes around 20 seconds to process the results after you have initiated the *mrinfo* command. The contents of the screen have to be refreshed to display the latest results.

Mrinfo Show

 Print

 Reload

 Help

Result

192.168.5.160 [version 3.255] [Flags : PGMS]

Router Interface	Neighbor	Metric	TTL	Flags
192.168.6.160	0.0.0.0	1	1	/querier/leaf
192.168.8.160	0.0.0.0	1	1	/querier/leaf
192.168.5.160	192.168.5.178	1	1	/querier

Mrinfo result processing in progress

New Mrinfo

Refresh

11.2.6.4.3. Configuring Mstat Run Page

Use this screen to initiate an *mstat* command on the router. You can use the *mstat* command to see the hop-by-hop path taken by packets from a given multicast source to the destination. It also gives you information regarding packet rate and packet loss on the path.

Configurable Data

Source IP - Enter the IP address of the multicast-capable source. This is the unicast address of the beginning of the path to be traced.


Receiver IP - Enter the IP address of the host to which the *mstat* response will be sent by the last hop router. If a value is not entered, the IP address of the router interface through which the *mstat* will be sent is used.

Group IP - Enter the multicast address of the group to be traced. If you leave this field blank, the multicast address 224.2.0.1 will be used. Valid addresses are 224.0.0.0 through

239.255.255.255.

Command Buttons

Submit - Initiate the *mstat* command on the router. If the *mstat* command completes successfully the browser will display the Mstat Show screen. If the *mstat* command fails, you will see the Mstat Run screen again.

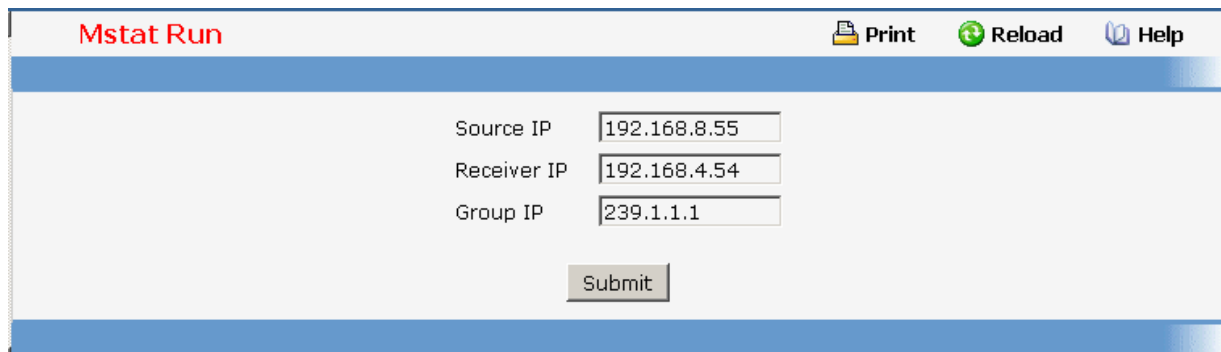

The screenshot shows the 'Mstat Run' web interface. At the top, there is a title bar with 'Mstat Run' in red and three icons: 'Print', 'Reload', and 'Help'. Below the title bar, there are three input fields: 'Source IP' with the value '192.168.8.55', 'Receiver IP' with the value '192.168.4.54', and 'Group IP' with the value '239.1.1.1'. Below these fields is a 'Submit' button.

11.2.6.4.4. Viewing Mstat Summary Page

This screen is used to display the results of an *mstat* command.


Non-Configurable Data

This screen shows the path taken by multicast traffic between the specified IP addresses. Forward data flow is indicated by arrows pointing downward and the query path is indicated by arrows pointing upward. For each hop, both the entry and exit addresses of the router are shown if different, along with the initial TTL required for packets to be forwarded at this hop and the propagation delay across the hop. The right half of the screen displays statistics for the path in two groups. Within each group, the columns are the number of packets lost, the number of packets sent, the percentage lost, and the average packet rate at each hop. These statistics are calculated from differences between traces and from hop to hop. The first group shows the statistics for all traffic flowing out the interface at one hop and in the interface at the next hop. The second group shows the statistics only for traffic forwarded from the specified source to the specified group.

Command Buttons

New Mstat - Redirect the web browser to the Mstat Run screen so that you can initiate another *mstat* command.

Refresh - Refresh the content of the screen with the latest data available on the router. Typically, it takes around 20 seconds to process the results after initiating *mstat* command. You must refresh the screen to display the latest results.

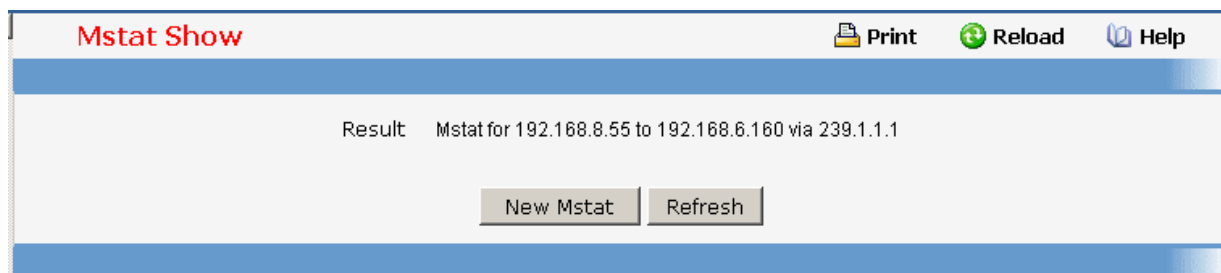

The screenshot shows the 'Mstat Show' web interface. At the top, there is a title bar with 'Mstat Show' in red and three icons: 'Print', 'Reload', and 'Help'. Below the title bar, there is a 'Result' section with the text 'Mstat for 192.168.8.55 to 192.168.6.160 via 239.1.1.1'. Below this text are two buttons: 'New Mstat' and 'Refresh'.


11.2.6.4.5. Defining Mtrace Admin Configuration Page

Configurable Data

Admin Mode - Select enable or disable from the pulldown menu. If you select enable the router will process and forward *mtrace* requests received from other routers, otherwise received *mtrace* requests will be discarded. This field is non-configurable for read-only users.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

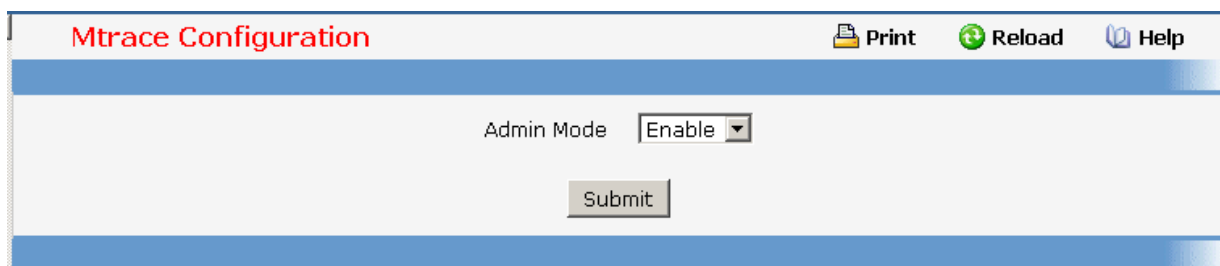

The screenshot shows a web interface for 'Mtrace Configuration'. At the top, there's a header bar with the title 'Mtrace Configuration' in red, and three icons: 'Print', 'Reload', and 'Help'. Below this is a main content area with a light blue background. It contains a label 'Admin Mode' followed by a dropdown menu currently set to 'Enable'. Below the dropdown is a 'Submit' button.

11.2.6.4.6. Configuring Mtrace Run Page

Use this screen to initiate an *mtrace* command on the router. You can use the *mtrace* command trace the path from the source to a destination branch for a multicast distribution tree.

Configurable Data


Source IP - Enter the IP address of a multicast-capable source. This is the unicast address of the beginning of the path to be traced.

Receiver IP - Enter the IP address of the host to which the *mtrace* response will be sent by the last hop router. If you leave this field blank, *mtrace* will use the IP address of the router interface through which the *mtrace* will be sent.

Group IP - Enter the Multicast address of the group to be traced. If you do not enter a valid address, multicast address 224.2.0.1 will be used. Valid addresses are 224.0.0.0 through 239.255.255.255.

Command Buttons

Submit - Initiate the *mtrace* command on the router. If the *mtrace* command completes successfully the browser will display the Mtrace Show screen. If the *mtrace* command fails, you will see the Mtrace Run screen again.

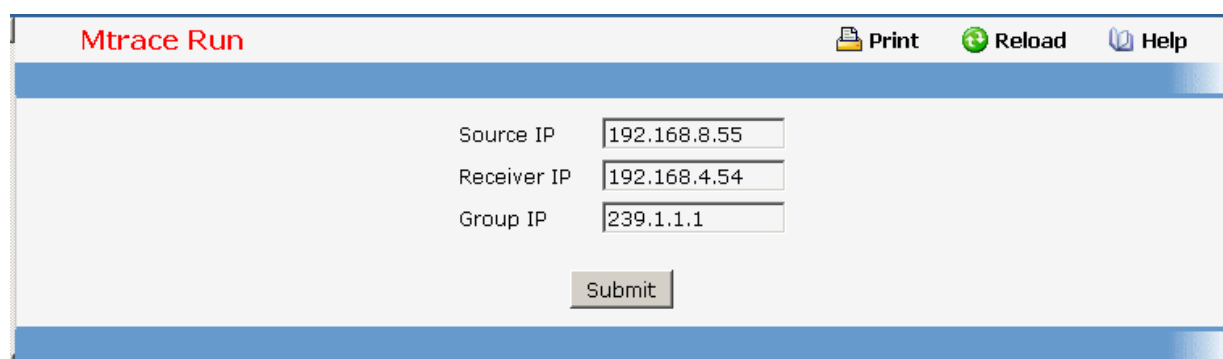

Mtrace Run [Print](#) [Reload](#) [Help](#)

Source IP

Receiver IP

Group IP

11.2.6.4.7. Viewing Mtrace Summary Page

This screen displays the results of an *mtrace* command. The *mtrace* command is used to trace the path from source to a destination branch for a multicast distribution tree.

Non-Configurable Data

Number of hops away from destination - The number of hops away from the destination.

IP address of intermediate router - The IP address of the intermediate router in the path being traced between source and destination for the hop number in the previous field.

Multicast Protocol in use - The multicast protocol in use on this hop.


TTL Threshold - The time-to-live threshold on this hop.

Time taken to forward between hops - The time taken for the trace request to be forwarded from the previous hop to this hop.

Command Buttons

New Mtrace - Redirect the web browser to the Mtrace Run screen so that you can initiate another *mtrace* command.

Refresh - Refresh the content of the screen with the latest data available on the router. Typically, it takes around 20 seconds to process the results after initiating *mtrace* command. You must refresh the screen to display the latest results.

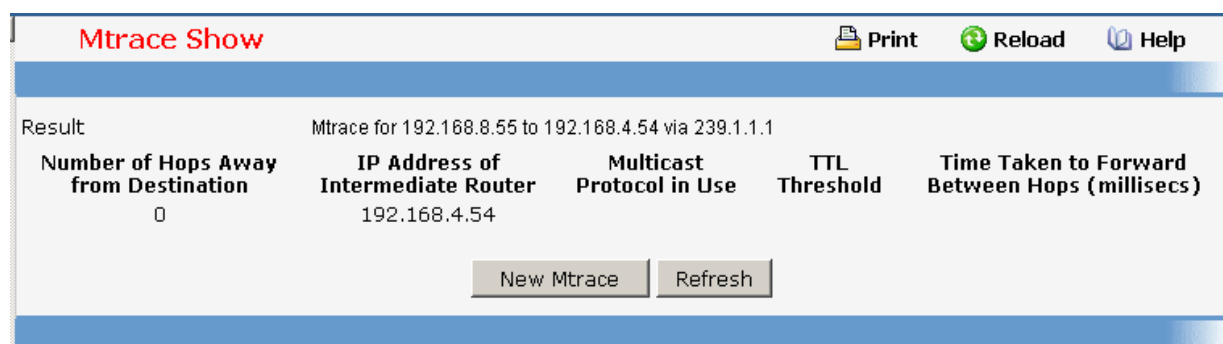

Mtrace Show [Print](#) [Reload](#) [Help](#)

Result Mtrace for 192.168.8.55 to 192.168.4.54 via 239.1.1.1

Number of Hops Away from Destination	IP Address of Intermediate Router	Multicast Protocol in Use	TTL Threshold	Time Taken to Forward Between Hops (milliseconds)
0	192.168.4.54			

11.2.6.5 Managing PIM-DM Protocol


11.2.6.5.1. Configuring PIM-DM Global Admin Configuration Page

Configurable Data

Admin Mode - Select enable or disable from the pulldown menu to set the administrative status of PIM-DM in the router. The default is disabled.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

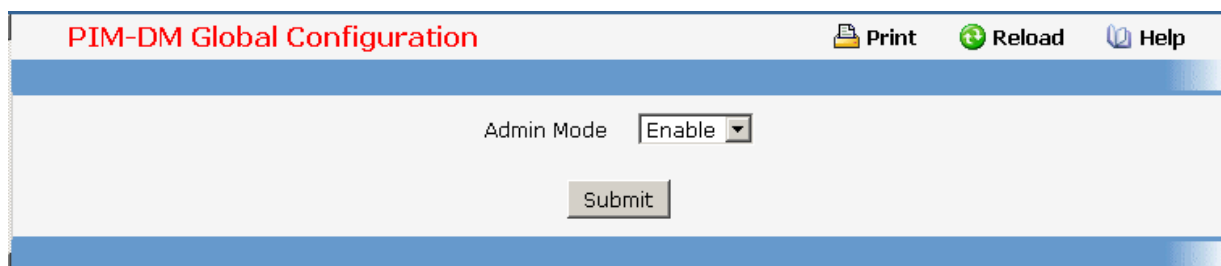

11.2.6.5.2. Configuring Interface's PIM-DM Configuration Page

Selection Criteria

Unit/Slot/Port - Select the Slot and port for which data is to be displayed or configured. Slot 0 is the base unit. You must have configured at least one router interface before configuring or displaying data for a PIM-DM interface, otherwise an error message will be displayed.


Configurable Data

Interface Mode - Select enable or disable from the pulldown menu to set the administrative status of PIM-DM for the selected interface. The default is disabled.

Hello Interval - Enter the number of seconds between PIM hello messages transmitted from the selected interface. The default value is 30. Valid values are from (10 to 3600).

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

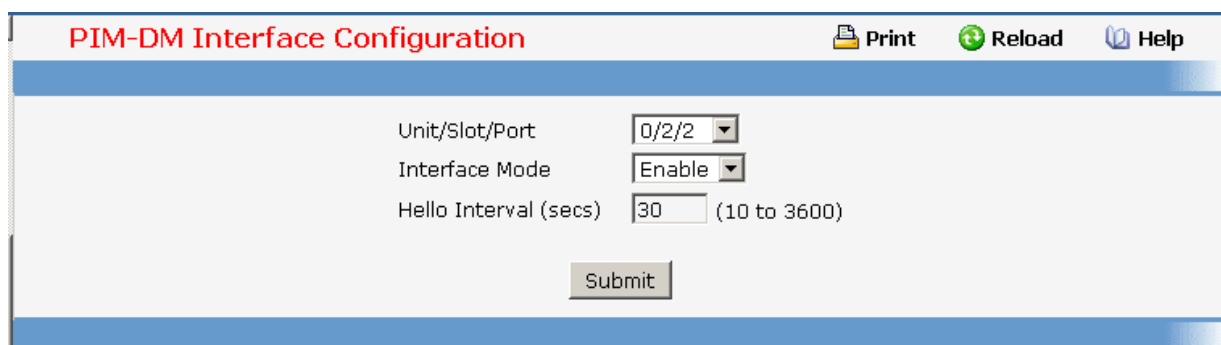

11.2.6.5.3. Viewing Interface's PIM-DM Configuration Page

Selection Criteria

Unit/Slot/Port - Select the physical interface for which data is to be displayed. There must be configured at least one router interface before displaying data for a PIM-DM interface, otherwise a message will be displayed.

Non-Configurable Data

Interface Mode - Displays the administrative status of PIM-DM for the selected interface. The default is disabled.

Protocol State - The operational state of the PIM-DM protocol on this interface.

Hello Interval - The frequency at which PIM hello messages are transmitted on the selected interface.

IP Address - The IP address of the selected interface.

Neighbor Count - The number of PIM neighbors on the selected interface.

Designated Router - The designated router on the selected PIM interface. For point-to-point interfaces, this will be 0.0.0.0.

Neighbor IP - The IP address of the PIM neighbor for which this entry contains information.

Uptime - The time since this PIM neighbor (last) became a neighbor of the local router.

Expiry Time - The minimum time remaining before this PIM neighbor will be aged out.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

PIM-DM Interface Summary			Print	Reload	Help
Unit/Slot/Port	0/2/2				
Interface Parameters					
Interface Mode	Enable				
Protocol State	Operational				
Hello Interval (secs)	30				
IP Address	192.168.5.160				
Interface Statistics					
Neighbor Count	1				
Designated Router	192.168.5.178				
Interface Neighbors					
Neighbor IP	Up Time (hh:mm:ss)	Expiry Time (hh:mm:ss)			
192.168.5.178	00:18:54	00:01:17			
Refresh					

11.2.6.6 Managing PIM-SM Protocol

11.2.6.6.1. Configuring PIM-SM Global Configuration Page

Configurable Data

Admin Mode - Select enable or disable from the pulldown menu to set the administrative status of PIM-SM in the router. You must enable IGMP before enabling PIM-SM. The default is disabled.


Join/Prune Interval - Enter the interval between the transmission of PIM-SM Join/Prune messages. The valid values are from (10 to 3600 secs). The default value is 60.

Data Threshold Rate - Enter the minimum source data rate in K bits/second above which the last-hop router will switch to a source-specific shortest path tree. The valid values are from (0 to 2000 K bits/sec) . The default value is 50.

Register Threshold Rate - Enter the minimum source data rate in K bits/second above which the Rendezvous Point router will switch to a source-specific shortest path tree. The valid values are from (0 to 2000 K bits/sec) . The default value is 50.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

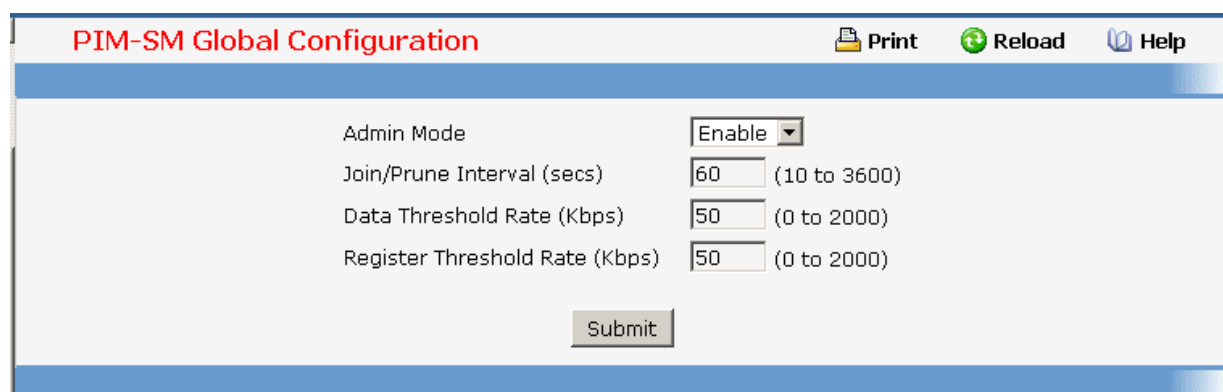

11.2.6.6.2. Viewing PIM-SM Global Configuration Page

Non-Configurable Data

Admin Mode - The administrative status of PIM-SM in the router: either enable or disable.

Join/Prune Interval - The interval between the transmission of PIM-SM Join/Prune messages.




Data Threshold Rate - The minimum source data rate in K bits/second above which the last-hop router will switch to a source-specific shortest path tree.

Register Threshold Rate - The minimum source data rate in K bits/second above which the Rendezvous Point router will switch to a source-specific shortest path tree.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

PIM-SM Global Parameters

 **Print**  **Reload**  **Help**

Admin Mode	Enable
Join/Prune Interval (secs)	60
Data Threshold Rate (Kbps)	50
Register Threshold Rate (Kbps)	50

Refresh

11.2.6.6.3. Configuring Interface's PIM-SM Configuration Page

Selection Criteria

Unit/Slot/Port - Select the slot and port for which data is to be displayed or configured. Slot 0 is the base unit.

Configurable Data

Mode - Select enable or disable from the pulldown menu to set the administrative status of PIM-SM in the router. The default is disable.

Hello Interval - Enter the time in seconds between the transmission of which PIM Hello messages on this interface. The valid values are from (10 to 3600 secs) . The default value is 30.

CBSR Preference - Enter the preference value for the local interface as a candidate bootstrap router. The value of -1 is used to indicate that the local interface is not a candidate BSR interface. The valid values are from (-1 to 255) The default value is 0.

CBSR Hash Mask Length - Enter the CBSR hash mask length to be advertised in bootstrap messages if this interface is elected as the bootstrap router. This hash mask length will be used in the hash algorithm for selecting the RP for a particular group. The valid values are from (0 to 32). The default value is 30.

CRP Preference - Enter the preference value for the local interface as a candidate bootstrap router. The value of -1 is used to indicate that the local interface is not a candidate BSR interface. The valid values are from (-1 to 255). The default value is 0.

Command Buttons

Submit - Send the updated configuration to the router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

11.2.6.6.4. Viewing Interface's PIM-SM Configuration Page

Selection Criteria

Unit/Slot/Port - Select the slot and port for which data is to be displayed. Slot 0 is the base unit.

Non-Configurable Data

Mode - The administrative status of PIM-SM in the router: either enable or disable.

Protocol State - The operational state of the PIM-SM protocol on this interface.

IP Address - The IP address of the selected PIM interface.

Net Mask - The network mask for the IP address of the selected PIM interface.

Designated Router - The Designated Router on the selected PIM interface. For point-to-point interfaces, this object has the value 0.0.0.0.

Hello Interval - The frequency at which PIM Hello messages are transmitted on the selected interface.

CBSR Preference - The preference value for the local interface as a candidate bootstrap router. The value of -1 is used to indicate that the local interface is not a candidate BSR interface.

CBSR Hash Mask Length - The CBSR hash mask length to be advertised in bootstrap messages if this interface is elected as the bootstrap router. This hash mask length will be used in the hash algorithm for selecting the RP for a particular group.

CRP Preference - The preference value for the local interface as a candidate bootstrap router. The value of -1 is used to indicate that the local interface is not a candidate BSR interface.

Neighbor Count - The number of PIM neighbors on the selected interface.

IP Address - The IP address of the PIM neighbor for this entry.




Up Time - The time since this PIM neighbor (last) became a neighbor of the local router.

Expiry Time - The minimum time remaining before this PIM neighbor will be aged out.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

PIM-SM Interface Summary

 Print
  Reload
  Help

Unit/Slot/Port	0/2/2
Mode	Enable
Protocol State	Operational
IP Address	192.168.5.160
Net Mask	255.255.255.0
Designated Router	192.168.5.178
Hello Interval (secs)	30
CBSR Preference	0
CBSR Hash MaskLength	30
CRP Preference	0
Neighbor Count	1

IP Address	Up Time (hh:mm:ss)	Expiry Time (hh:mm:ss)
192.168.5.178	00:02:02	00:01:45

11.2.6.6.5. Viewing PIM-SM Component Summary Page

Non-Configurable Data

Component Index - Unique number identifying the component index.

Component BSR Address - Displays the IP address of the bootstrap router (BSR) for the local PIM region.



Component BSR Expiry Time - Displays the minimum time remaining before the bootstrap router in the local domain will be declared.

Component CRP Hold Time - The hold time of the component when it is a candidate Rendezvous Point in the local domain.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

PIM-SM Component Summary

 Print
  Reload
  Help

Component Index	Component BSR Address	Component BSR Expiry Time (hh:mm:ss)	Component CRP Hold Time (hh:mm:ss)
1	192.168.8.160	00:00:55	00:00:55

11.2.6.6.6. Viewing PIM-SM RP Summary Page

Non-Configurable Data

Group Address - Displays IP multicast group address.

Group Mask - Displays Multicast group address mask.

Address - Displays IP address of the Candidate-RP.

Hold Time - The holdtime of a Candidate-RP.If the local router is not the BSR, this value is 0.

Expiry Time Component - The minimum time remaining before the Candidate-RP will be declared.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

PIM-SM RP Set Summary						Print	Reload	Help
Group Address	Group Mask	Address	Hold Time (hh:mm:ss)	Expiry Time Component (hh:mm:ss)	Component			
224.0.0.0	240.0.0.0	192.168.8.160	00:01:45	00:02:30	1			
Refresh								

11.2.6.6.7. Viewing PIM-SM Candidate RP Summary Page

Non-Configurable Data

Group Address - The group address transmitted in Candidate-RP-Advertisements.

Group Mask - The group address mask transmitted in Candidate-RP-Advertisements to fully identify the scope of the group which the router will support if elected as a Rendezvous Point.

Address - Displays the unicast address of the interface which will be advertised as a Candidate RP.

Command Buttons

Refresh - Refresh the data on the screen with the present state of the data in the router.

PIM-SM Candidate RP Summary			Print	Reload	Help
Group Address	Group Mask	Address			
224.0.0.0	240.0.0.0	192.168.8.160			
Refresh					

11.2.6.6.8. Configuring PIM-SM Static RP Configuration Page

Configurable Data

IP Address - IP Address of the RP to be created or deleted.

Group - Group Address of the RP to be created or deleted.

Group Mask - Group Mask of the RP to be created or deleted.

Command Buttons

Submit - Attempts to create the specified static RP IP Address for the PIM-SM router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

Delete - Attempts to remove the specified static RP IP Address for the PIM-SM router. Configuration changes take effect immediately. These changes will not be retained across a power cycle unless a save is performed.

IP Address	Group	Group Mask
192.168.6.55	239.1.1.1	255.255.255.255

11.2.7 Rapid Super Ring Menu

11.2.7.1 Global Configuration

Configurable Data

Admin Mode – Configure Administrative mode to be Enable or Disable

Command Buttons

Submit – This command allows you to enable or disable the global configuration setting.

Admin Mode: Enable

Submit

11.2.7.2 Rapid Super Ring Configuration

Configurable Data


Ring Port Interface – Select the target ring ring. The 1/0/1 represents to port 1 of the unit 1, the 1/0/2 represents to port 2 of the unit 1,...etc.

Interface Mode – Configure Ring port Interface mode to be Enable or Disable

Configured Interface – This field display the configured interfaces.

Command Buttons

Submit – This command allows you to enable or disable the global configuration setting.

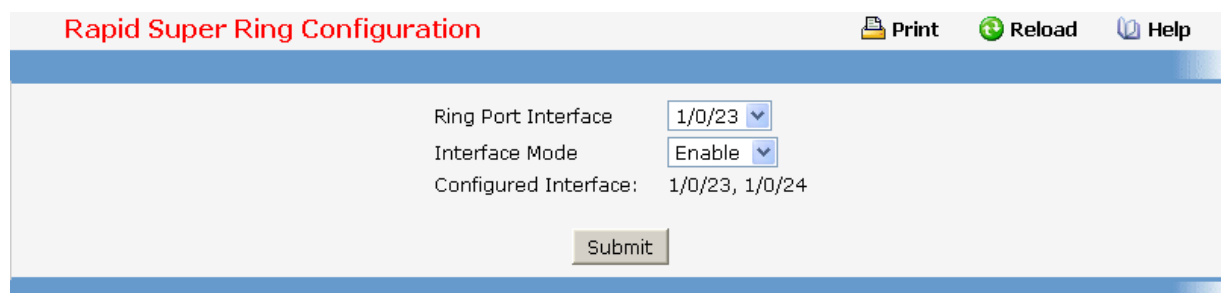

The screenshot shows a web interface titled "Rapid Super Ring Configuration". At the top right, there are three icons: a printer icon labeled "Print", a circular arrow icon labeled "Reload", and a question mark icon labeled "Help". The main configuration area contains three fields: "Ring Port Interface" with a dropdown menu showing "1/0/23", "Interface Mode" with a dropdown menu showing "Enable", and "Configured Interface:" displaying "1/0/23, 1/0/24". Below these fields is a "Submit" button.

Error Popup Screen

The RSR member supports single ring only. There are only 2 available ring ports in single JetNet 6524G. Should you see the popup screen, it shows the RSR table is full. You should disable one specific configured port before you want assign new ring port.



11.2.7.3 Rapid Super Ring Summary

Display Message

RSR Ring ID This field indicates the RSR Ring ID learnt from the RSR Hello packet

RSR Version This field indicates the Ring Version.




Ring Ports This field display the configured members of the RSR ring.

RM MAC address This field indicates the RM's MAC address

Ring State This field indicates the status of the RSR ring.

Command Buttons

Refresh – This command allows you to refresh the display message on web UI.

Rapid Super Ring Summary				
<div>  Print  Reload  Help </div>				
Ring ID	Version	Ring Ports	RM MAC Address	Ring State
0	Rapid Super Ring	1/0/23, 1/0/24	00:00:00:00:00:00	Normal
<div>Refresh</div>				

11.2.8 Stacking Menu

11.2.8.1 Configuring Stack Unit

Selection Criteria

Switch ID - Displays the list of units of the stack. Details of the selected unit are displayed. There is also a Create option visible only to Admin users which can be used to pre-configure new members of the stack.

Configurable Data

Switch ID - Displays the switch ID of the selected switch in the stack. This can be altered to renumber the switch ID of the selected switch by admin users. This field is non-configurable for users with read-only access.

Priority - A two-byte field that indicates whether the administrator wants this unit to become a management unit in preference to another unit. The default value for this setting is unassigned. If the preference level is set to disable then the device cannot become a management unit. This field is non-configurable for users with read-only access.

Non-Configurable Data

Role - Displays whether the selected switch is the master or a slave.

MAC Address - The MAC address of switch units.

Hardware Management Preference - A two-byte field that indicates whether this unit is capable of becoming the Management Unit. If the value is set to zero then the unit cannot support Management Unit function. The higher value means that the unit is more desirable than another unit with lower value for running the management function. The device manufacturer sets this field.

Switch Type - Identifies the hardware type of the selected unit. This is a 32-bit data field.

Current Status - Displays the status of the selected unit. The possible values are:

- *Ready*
- *Unsupported*
- *Code Mismatch*
- *Config Mismatch*
- *Not Present*

Switch Description - Displays a 80-byte data field used to identify the device.

Detected Code Version - Release number and version number of the code detected.

Detected Code in Flash - Displays the Release number and version number of the code stored in flash.

Up Time - Displays the relative time since the last reboot of the switch.

Command Buttons

Submit - Update the switch with the values on the screen. If you want the switch to retain the new values across a power cycle, you must perform a save.

Delete - Removes the selected unit from the stack.

To be Master – Moves the Primary Management Unit functionality from one unit to another.

Refresh - Update the information on the page.

Unit ConfigurationPrintReloadHelp

Switch ID	1
Switch ID	1
Serial Number	QTFCEA9240153
Role	Master
MAC Address	00:23:8B:CE:7C:5B
Hardware Management Preference	Unassigned
Priority	Unassigned
Switch Type	0x65040001
Current Status	Ready
Switch Description	24G Stackable Layer 3 Switch - 24 GE, Stacking
Detected Code Version	1.12.0.0
Detected Code in Flash	1.12.0.0
Up Time	10141 seconds

SubmitDeleteTo be MasterRefresh

11.2.8.2 Downloading Runtime Image to Stack Members

Selection Criteria

Unit - Displays the list of all units of the stack other than the management unit.

Command Buttons

Submit - Copies the code from the management Unit to stack unit(s) specified by the unit selector.

Download Archive - Downloads an archive file to the switch.

Archive CopyPrintReloadHelp

Unit All

Download ArchiveSubmit

11.2.8.3 Viewing Stack Summary Information

Non-Configurable Data

Switch ID - Displays the ID of the unit. The maximum number of units allowed in the stack is 8.

Role - This field indicates whether the unit is a Master or Slave.

MAC Address - The MAC address of switch units..

Priority - A two-byte field that indicates whether the administrator wants this unit to become a management unit in preference to another unit. The default value for this setting is one. If the preference level is set to zero then the device cannot become a management unit. This field is non-configurable for users with read-only access.

Current Status - This field indicates the unit status. There are five possible state values:


- *Ready*
- *Unsupported*
- *CodeMismatch*
- *ConfigMismatch*
- *Present*
- *NotPresent*


Code Version - This field indicates the detected version of code on this unit.


Command Buttons

Refresh - Update the information on the page.

Stack Summary

 Print

 Reload

 Help

Switch ID	Role	Mac Address	Priority	Current Status	Code Version
1	Master	00:11:22:33:44:55	Unassigned	Ready	0.3.0.0
2	Slave	00:22:33:44:55:66	Unassigned	Ready	0.3.0.0
3	Slave	00:40:33:12:34:56	Unassigned	Ready	0.3.0.0

Refresh

11.2.8.4 Viewing Stack Port Summary Information

Shows the statistics for all the stackable interfaces in the given stack.

Non-Configurable Data

Unit - Displays the unit.

Interface - Displays the stackable interfaces on the given unit.

Configured Stack Mode - Displays the configured mode for the given interface. Even though the configured mode is immediately saved in the NVRAM, on the unit on which the port is located, the run-time mode is not changed.

Running Stack Mode - Displays the run-time mode of the stackable interface.

Link Status - Displays the link status (UP/DOWN) of the port.

Link Speed (Gb/s) - Displays the maximum speed of the stacking port.

Command Buttons

Refresh - Refreshes the data on the page.

Stack Port Summary						Print	Reload	Help
Unit	Interface	Configured stack-mode	Running stack-mode	Link Status	Link Speed (Gb/s)			
1	HiGig 1	N/A	Stack	Link up	10			
1	HiGig 2	N/A	Stack	Link Down	10			
2	HiGig 1	N/A	Stack	Link up	10			
2	HiGig 2	N/A	Stack	Link up	10			
3	HiGig 1	N/A	Stack	Link Down	10			
3	HiGig 2	N/A	Stack	Link up	10			
						Refresh		

11.2.8.5 Viewing Stack Port Counters Information

Displays the counters for all the stackable interfaces in the given stack.

Non-Configurable Data

Unit - Displays the unit.

Interface - Displays the stackable interfaces on the given unit.

Transmit and Receive statistics

Data Rate (Mb/s) - Displays the approximate rate on the stacking port.

Error Rate (Errors/s) - Displays an approximate error rate on the stack port.


Total Errors - Displays the total number of errors since boot. The counter may wrap.


Command Buttons


Refresh - Refreshes the data on the page.

Clear Counters - Reset stack port statistics.

Stack Port Counters

 Print

 Reload

 Help

Unit	Interface	Transmit			Recieve		
		Data Rate (Mb/s)	Error Rate (Errors/s)	Total Errors	Data Rate (Mb/s)	Error Rate (Errors/s)	Total Errors
1	HiGig 1	0	0	0	0	0	0
1	HiGig 2	0	0	0	0	0	0
2	HiGig 1	0	0	0	0	0	0
2	HiGig 2	0	0	0	0	0	0
3	HiGig 1	0	0	0	0	0	0
3	HiGig 2	0	0	0	0	0	0

Refresh

Clear Counters

11.2.8.6 Viewing Stack Port Counters Detail Information

Displays the detail counter information for all the stackable interfaces in the given stack.

Non-Configurable Data

Interface - Displays the stackable interface on the given unit.

Port Information - Displays three text fields (*80 character strings*) populated by the driver containing debug and status information.

RBYT: Number of received bytes.

RPKT: Number of received packets.

TBYT: Number of transmitted bytes.

TPKT: Number of transmitted packets.

RFCS: Number of received FCS errors.

RFRG: Number of received packets which are undersize and FCS errors.

RJBR: Number of received packets which are oversize and FCS errors.

RUND: Number of received packets which are undersize and FCS are OK.




ROVR: Number of received packets which are oversize and FCS are OK.

TAGE: Number of packets which are aged out in MMU.

TABRT: Number of packets which are aborted

Command Buttons

Refresh - Refreshes the data on the page.

Stack Port Counters Detail **Print**  **Reload**  **Help**

1/HiGig 1
RBYT:33590a RPKT:4300 TBYT:3df585 TPKT:51b6
RFCS:0 RFRG:0 RJBR:0 RUND:0 ROVR:0
TAGE:0 TABRT:0

1/HiGig 2
RBYT:0 RPKT:0 TBYT:1d6fd8 TPKT:12cb
RFCS:0 RFRG:0 RJBR:0 RUND:0 ROVR:0
TAGE:0 TABRT:0

2/HiGig 1
RBYT:122310d RPKT:b74d TBYT:7b75f5 TPKT:b77b
RFCS:0 RFRG:0 RJBR:0 RUND:0 ROVR:0
TAGE:0 TABRT:0

2/HiGig 2
RBYT:257c49 RPKT:421b TBYT:61be21 TPKT:6099
RFCS:0 RFRG:0 RJBR:0 RUND:0 ROVR:0
TAGE:0 TABRT:0

3/HiGig 1
RBYT:0 RPKT:0 TBYT:33579a TPKT:20c2
RFCS:0 RFRG:0 RJBR:0 RUND:0 ROVR:0
TAGE:0 TABRT:0

3/HiGig 2
RBYT:7b7799 RPKT:b77c TBYT:122310d TPKT:b74d
RFCS:0 RFRG:0 RJBR:0 RUND:0 ROVR:0
TAGE:0 TABRT:0

Refresh

Revision History

Version	Description	Date
V1.0	The 1 st release version.	Jul. 31, 2009
V1.1	Add LLDP configuration.	Aug. 5, 2009
V1.2	Add description of DC input.	Oct. 22, 2009
V1.3	Add description of RSR member mode, update overview, feature and added model ordering information.	Jan. 19, 2010